
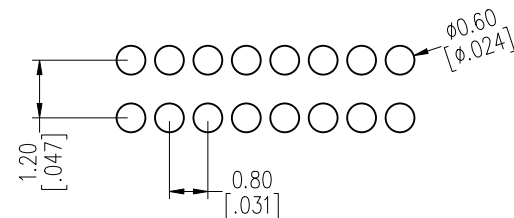


# HSF

NOTES:  
 Rated Current: 0.75AMP  
 Contact Resistance: 30mΩ max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au Over Ni  
 Insulator Material: LCP+30%G.F UL94V-0 BK(STD)



Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

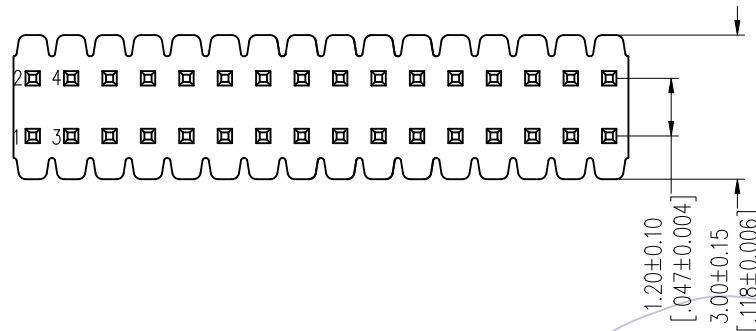

## Ordering Information

1614-12 XX XX S XXX D A 0X

No. of Pins Per Row: 01-50  
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold  
 Pin Length: L=A+B+1.4  
 Series No.  
 Packing: A=Tray  
 Plastic Material: D=LCP, C=PA9T

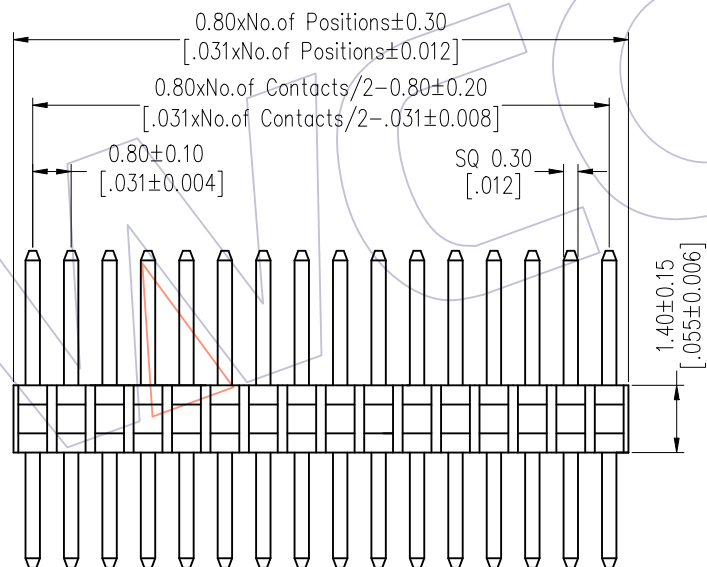

Dimension antitheses list		
ITEM	A	B
Standard	2.50	2.80
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A0	2013/12/04	NEW	-----	x.x ±0.40	Tang	2013/12/04	UNIT	mm	1614-12XXXXXXXA0X
				x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	PH0.80*1.20 DUAL ROW 180D DIP H=1.4
				Angle ± 3°			PROJ.	Customer NO.	
				DIM TOL					

# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com  
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com