
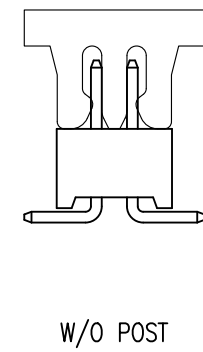
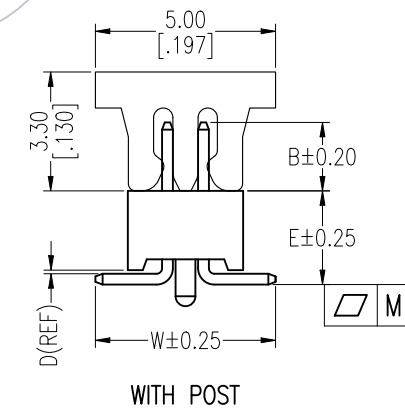
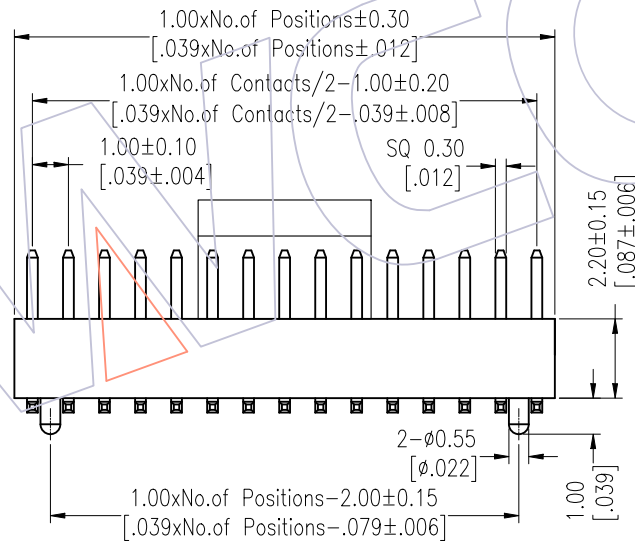
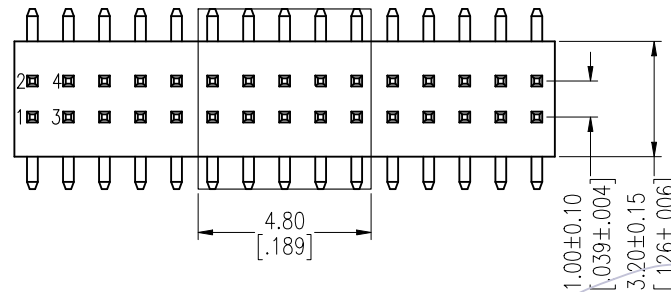


# HSF

NOTES:  
 Rated Current:0.75AMP.  
 Contact Resistance:30mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-O BK

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

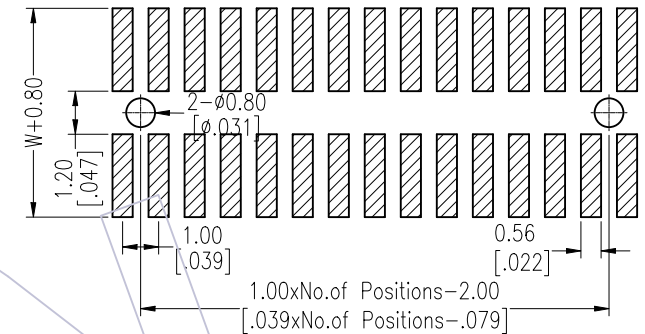

## Ordering Information

1522-12 XX XX M 062 C R XX

No. of Pins	Contact Plating	Pin Length	Insulator	Series No.
Per Row:02-50	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold SN=Tin SM=Matte Tin	L=B+D+2.2+ $\frac{W+1.0}{2}$ Standard:062=6.2	C=PA9T	01~99
				Packing T=Tube P=Tube+CAP R=Tape&Reel+CAP

Item	Pin Length	W	E	B
Standard	6.2	5.00	2.60	1.90
Alternate				

PIN(PerRow)	2-15P	16-30P	31-50P
M	0.10	0.12	0.18

A3	2023/02/01	Add Flatness	△3	Du Ying	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/01/05	MODIFY PART NO.	△2	William Chen	X.X ±0.40	Du Ying	2023/02/01	UNIT	mm [inch]	1522-12XXXXMXXXCXXX △2
A1	2012/11/21	Modify the material	△1	-----	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/03/01	NEW	-----	-----	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	1.00 Pin Header, DUAL ROW, SMT, H=2.2
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	-----	Angle ± 3°	APPROVE	DATE	PROJ.	Customer NO.	
					DIM TOL					

**WCON**  
 Http: www.wcon.com  
 WCON-Dongguan Tel: +86 769 85358920  
 WCON-Kunshan Tel: +86 512 57468408  
 Fax: +86 769 85358915  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com  
 E-mail: salesks@wcon.com