
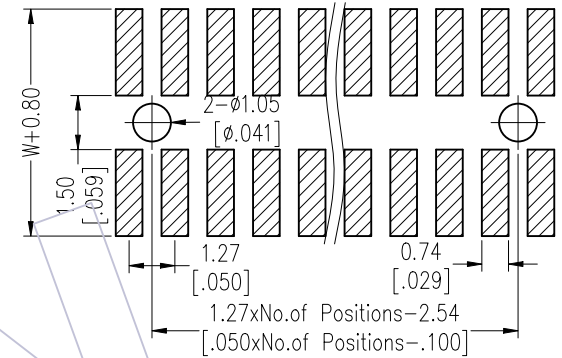


HSF

NOTES:
 Rated Current: 1.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +125°C(GOLD)
 -40°C to +105°C(TIN) Δ

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

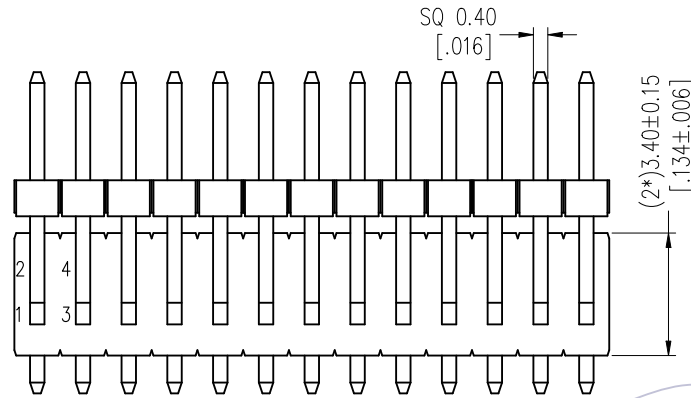

Ordering Information

1310-22 XX XX D XXX C A XX

No. of Pins Per Row: 02-50	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length L=B1+E-2.1+ $\frac{W}{2}$ ±.27	Insulator C=PA9T	Series No. 01-99	Packing A=Tray
-------------------------------	---	--	---------------------	---------------------	-------------------

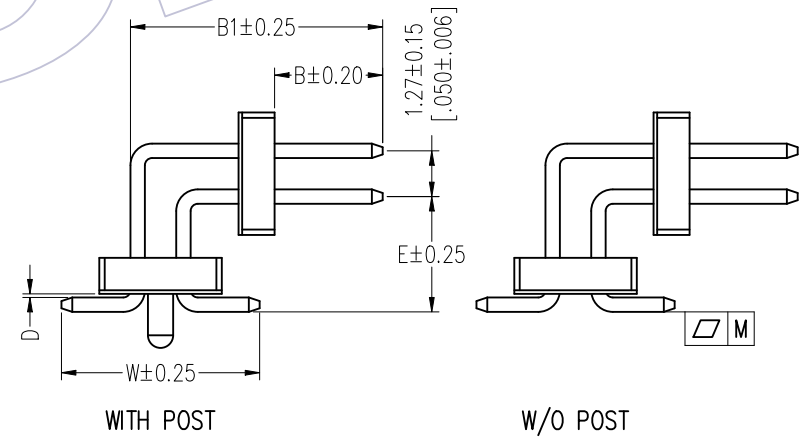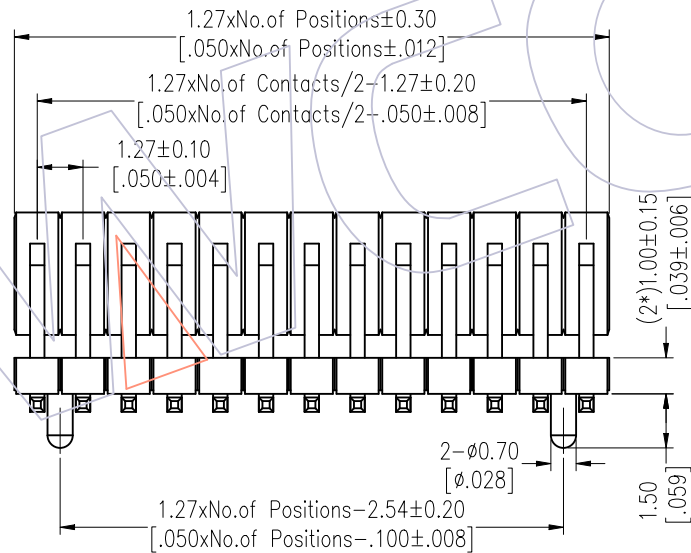

Item	Pin Length	W	D	E	B	B1	Mating
Standard	---	5.50	0.10	---	3.00	---	2334
	---	5.50	0.10	---	4.00	---	2344
Alternate							

Δ	PIN	2-15P	16-30P	31-50P
	M	0.10	0.15	0.25

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/09/07	MODIFY	-----	x.x ± 0.40	Ding	2018/09/07	UNIT	mm [inch]	1310-22XXXXXXCX XX Δ
A1	2018/01/12	MODIFY PART NO.	-----	x.xx ± 0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/03/13	NEW	-----	x.xxx ± 0.15	APPROVE	DATE	SHEET	1/1	1.27 Pin Header, DUAL ROW, R/A&SMT, DOUBLE PLASTIC, H=1.0
				Angle ± 3°			PROJ.		Customer NO.
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--