
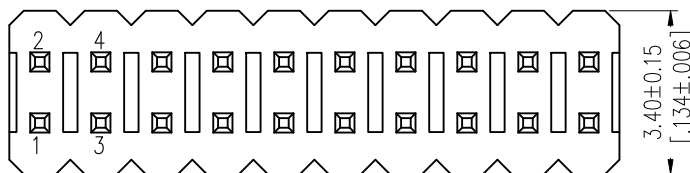


HSF

NOTES:
 Rated Current: 1.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

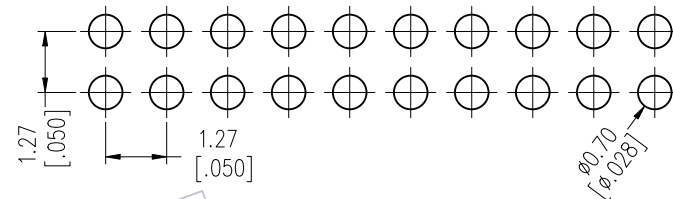

Ordering Information

1315-12 XX XX S XXX C A XX

No. of Pins Per Row: 02~50	Contact Plating	Pin Length	Insulator	Packing	Series No.
	G0=Gold Flash	L=A+B+1.5	C=PA9T	A=Tray	01~99
	G3=10u"Gold	Std:052=5.2			
	G4=15u"Gold	063=6.3			
	G5=30u"Gold	073=7.3			
	S0=Gold Flash/Tin				
	S3=10u"Gold/Tin				
	S4=15u"Gold/Tin				
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

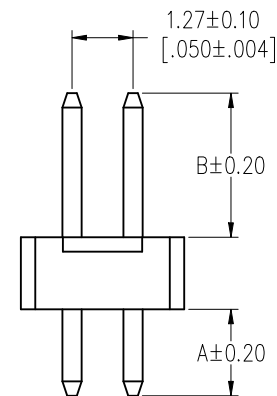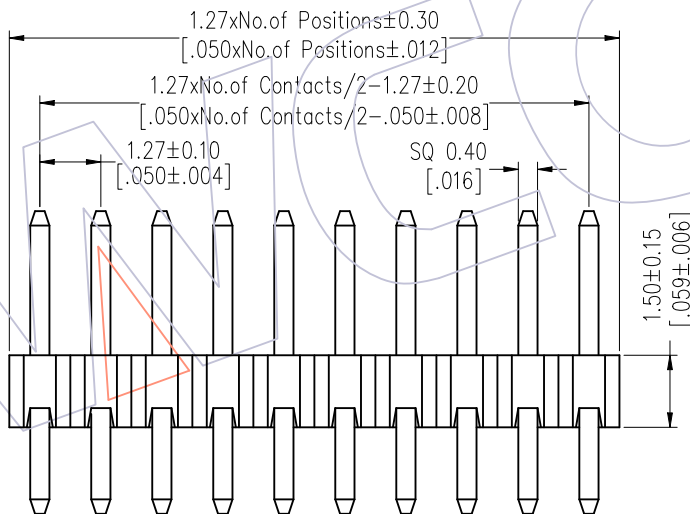

Item	Pin Length	A	B	Mating
Standard	5.2	1.80	1.90	2321
	6.3	1.80	3.00	2334
	7.3	1.80	4.00	2344
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/01/15	MODIFY PART NO.	-----	X.X ± 0.40	William Chen	2018/01/15	UNIT	mm [inch]	1315-12XXXXXXCXXX
A1	2015/01/03	Mofidy Drawing	-----	X.XX ± 0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/03/15	NEW	-----	X.XXX ± 0.15	APPROVE	DATE	SHEET	1/1	1.27 Pin Header, DUAL ROW, S/T, H=1.5
				Angle ± 3°			PROJ.		Customer NO.
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan	WCON-Kunshan
Tel: +86 769 85358920	Tel: +86 512 57468408
Fax: +86 769 85358915	Fax: +86 512 57468468
E-mail: sales@wcon.com	E-mail: salesks@wcon.com