

HSF

NOTES:
 Rated Current:1.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-O BK

Ordering Information




1320-22 XX XX M XXX C R XX

No. of Pins Per Row:02~50	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length L=B+C+D+W/2 1.27	Insulator C=PA9T	Series No. 01~99	Packing A=Tray T=Tube P=Tube+CAP R=Tape&Reel+CAP
------------------------------	---	-----------------------------------	---------------------	---------------------	--

Item	Pin Length	W	D	B	E	Mating
Standard	--	5.50	0.10	1.90	--	2321
	--	5.50	0.10	3.00	--	2334
	--	5.50	0.10	4.00	--	2344
Alternate						




TYPE-1

TYPE-2

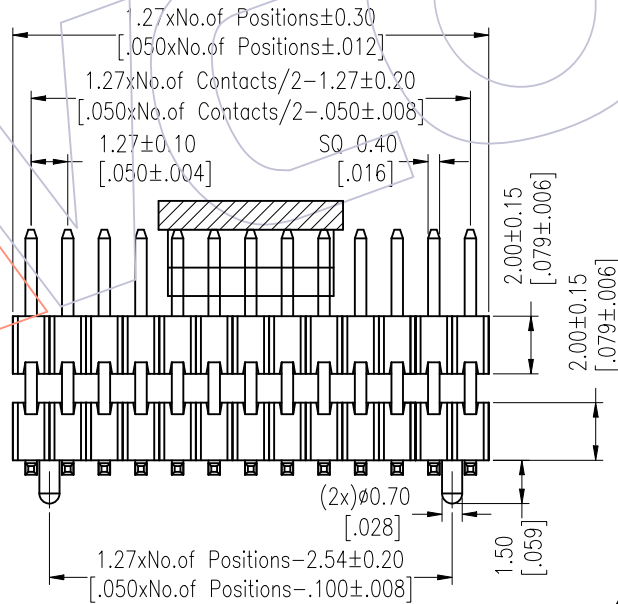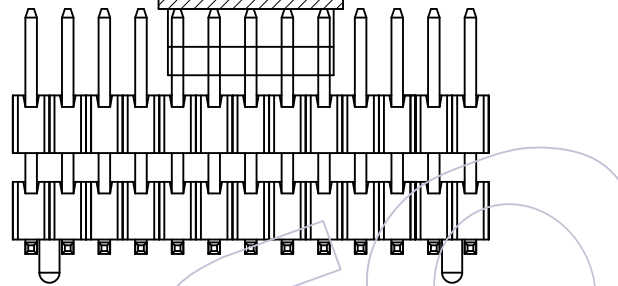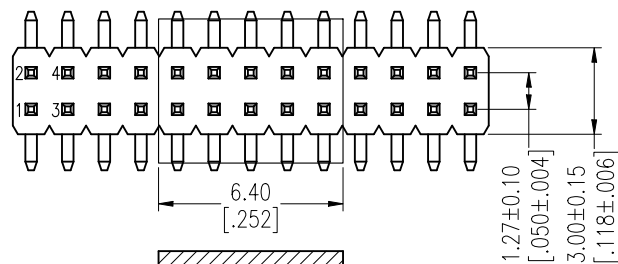

Recommended P.C.B Layout (Top Side)

(PCB BOARD TOLERANCE±0.05)

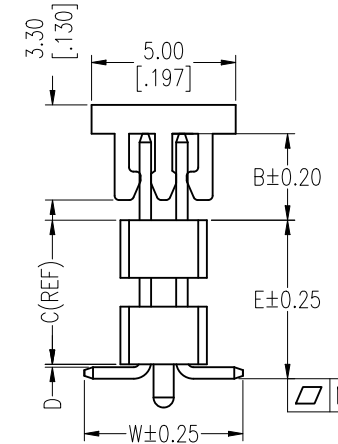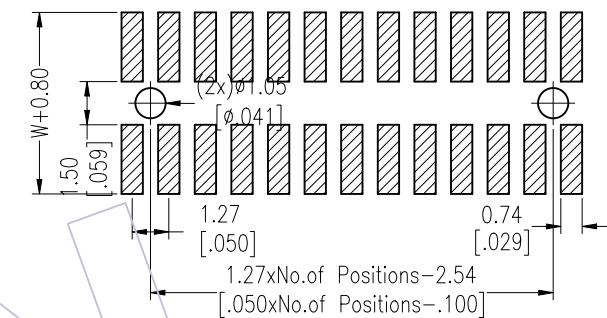

PIN(PerRow)	2-15P	16-30P	31-50P
	M	0.10	0.15

A4	2023/02/02	Add Flatness	△△	Du Ying	OPERATION	DRAW	DATE	SCALE	Fit	PART NO. 1320-22XXXXMXXXCXXX △△
A3	2021/12/28	MODIFY CAP	△△	Du Ying	x.X ±0.40	Du Ying	2023/02/02	UNIT	mm [inch]	
A2	2018/01/17	MODIFY PART NO.	△△	William Chen	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.27 Pin Header, DUAL ROW, SMT, DOUBLE PLASTIC, WITH POST, H=2.0
A0	2012/03/22	NEW	-----	-----	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	-----	Angle ± 3'	APPROVE	DATE	PROJ.	Customer NO.	

WCON

Http: www.wcon.com

WCON-Dongguan WCON-Kunshan

Tel: +86 769 85358920 Tel: +86 512 57468408

Fax: +86 769 85358915 Fax: +86 512 57468468

E-mail: sales@wcon.com E-mail: salesks@wcon.com