


# HSF



NOTES:  
 Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK


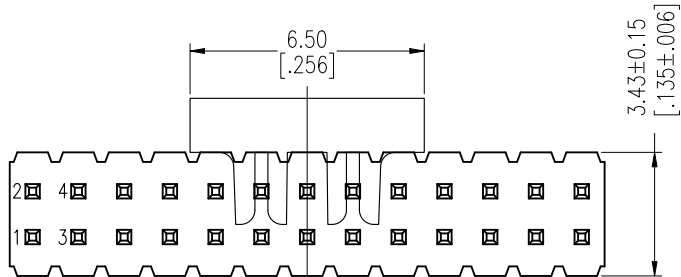


Odd Number

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

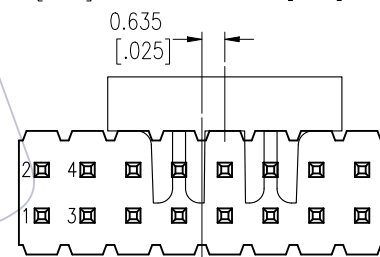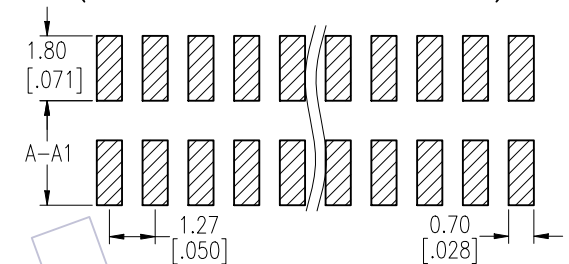

Dual Numbers

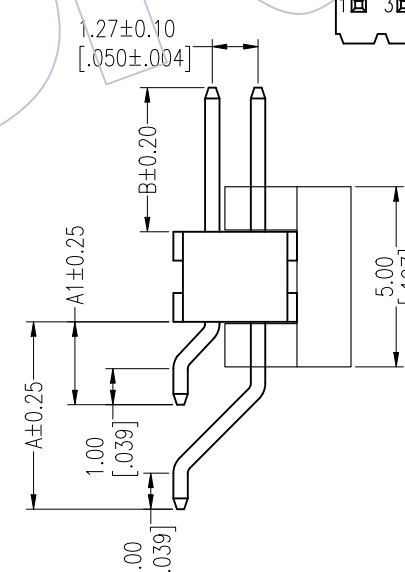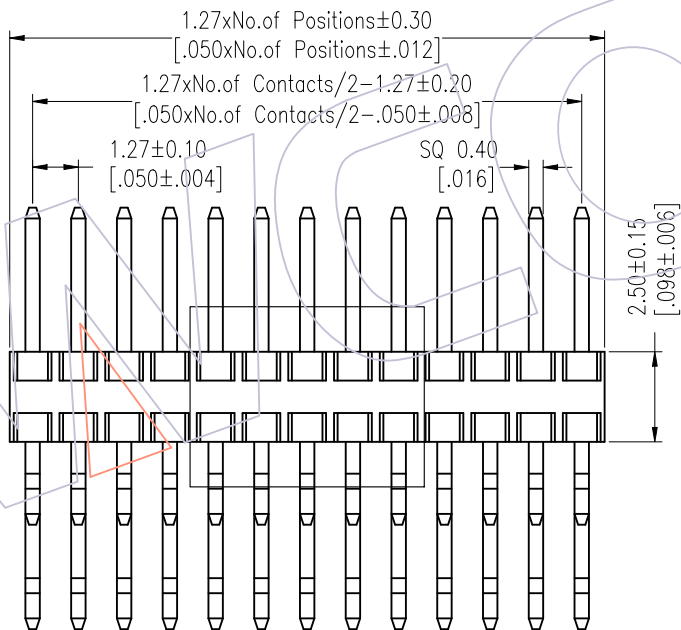

## Ordering Information

1325B-12 XX XX Z XXX C R XX

No.of Pins	Contact Plating	Pin Length(Short)	Insulator	Series No.
Per Row:01~50	G0=Gold Flash	L=A1+B+2.8	C=PA9T	01~99
	G3=10u"Gold	Standard:070=7.0		
	G4=15u"Gold	081=8.1	Packing	
	G5=30u"Gold	091=9.1	A=Tray	
	S0=Gold Flash/Tin		T=Tube	
	S3=10u"Gold/Tin		P=Tube+CAP	
	S4=15u"Gold/Tin		R=Tape&Reel+CAP	
	S5=30u"Gold/Tin			
	SN=Tin			
	SM=Matte Tin			

Item	Pin Length	A1	A	B	Mating
Standard	7.0	2.30	5.20	1.90	2321
	8.1	2.30	5.20	3.00	2334
	9.1	2.30	5.20	4.00	2344/2335
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A4	2018/01/18	MODIFY PART NO.	-----	OPERATION	William Chen	2018/01/18	UNIT	mm [inch]	1325B-12XXXXZXXXCXXX
A3	2013/06/07	Modify Drawing	-----	x.X ±0.40	CHECK	DATE	SIZE	A4	TITLE:
A2	2013/01/03	Modify Drawing	-----	x.XX ±0.25	APPROVE	DATE	SHEET	1/1	1.27 Pin Header, DUAL ROW, R/A&SMT, WITHOUT POST, H=2.5
A0	2012/03/31	NEW	-----	x.XXX ±0.15	APPROVE	DATE	PROJ.		Customer NO.
				Angle ± 3'					
				DIM TOL					

# WCON

Http: www.wcon.com

WCON-Dongguan	WCON-Kunshan
Tel: +86 769 85358920	Tel: +86 512 57468408
Fax: +86 769 85358915	Fax: +86 512 57468468
E-mail: sales@wcon.com	E-mail: salesks@wcon.com