
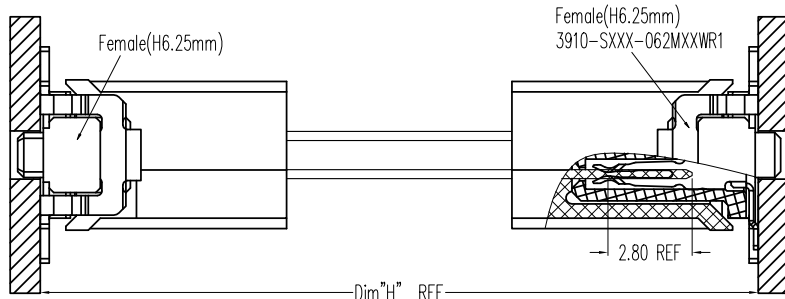


HSF

NOTES:

- 1.Current Rating:1.0A Max;
- 2.Contact Resistance: 25mΩ Max;
- 3.Withstand Voltage: 500V AC;
- 4.Insulation Resistance: 10000MΩ Min;
- 5.Operating Temperature: -55°C to +125°C;
- 6.Insulator Material: LCP,G.F,UL94V-0,BK;
- 7.Contact Material:Copper Alloy;
- 8.Contact plating:
xxμ" Gold on contact area (See ordering information),
50μ" Nickel underplating overall;





NO.	PART NO.	L	H
1	3912-XXXSS3AB182T01	18.20	20.0
2	3912-XXXSS3AB202T01	20.20	22.0
3	3912-XXXSS3AB222T01	22.20	24.0
4	3912-XXXSS3AB242T01	24.20	26.0
5	3912-XXXSS3AB262T01	26.20	28.0
6	3912-XXXSS3AB282T01	28.20	30.0
7	3912-XXXSS3AB302T01	30.20	32.0
8	3912-XXXSS3AB322T01	32.20	34.0
9	3912-XXXSS3AB342T01	34.20	36.0
10	3912-XXXSS3AB362T01	36.20	38.0

Ordering Information

3912 - XXX S S3 A B XXX T 01

- No. of Pins: 012=12PIN, 026=26PIN, 050=50PIN, 068=68PIN, 080=80PIN
- WCON internal code
- Packing: T=Tube
- Height of Adapter (Dim L): 182=18.2mm, 202=20.2mm, 222=22.2mm, 242=24.2mm, 262=26.2mm, 282=28.2mm, 302=30.2mm, 322=32.2mm, 342=34.2mm, 362=36.2mm
- 180° Type
- Contact plating: S3=10μ"Gold/ Ni
- A=In the same direction
- B=Black

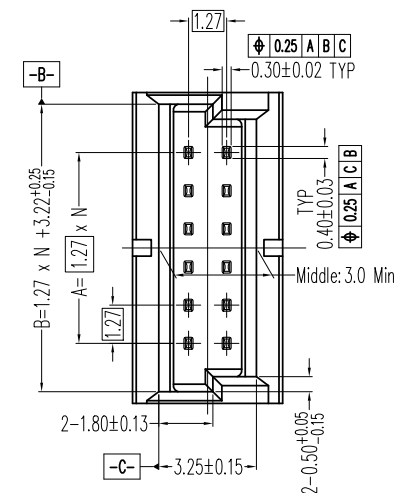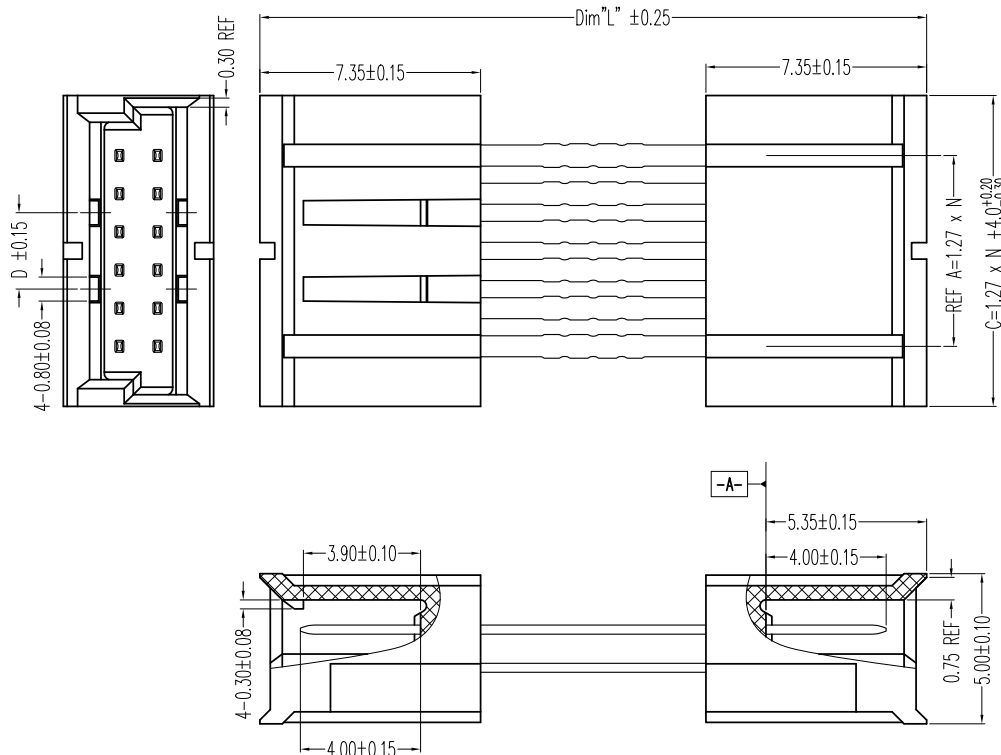

Pin	A	B	C	D	N
12	6.35	9.57	10.35	2.54	5
26	15.24	18.46	19.24	10.16	12
50	30.48	33.70	34.48	25.40	24
68	41.91	45.13	45.91	36.83	33
80	49.53	52.75	53.53	44.45	39

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.
				X.X	±0.40					
A0	2020.09.01	NEW	Houfu Peng	X.XX	±0.25	Houfu Peng	2020.09.01	UNIT	mm	3912-XXXSS3ABXXXT01
				X.XXX	±0.15			SIZE	A4	TITLE:
				Angle	± 3'			SHEET	1/1	1.27mm SDC M TO M Adapter
				DIM	TOL			PROJ.		Customer NO.

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com