

HSF


NOTES:
 Rated Current: 2.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +125°C(GOLD)
 -40°C to +105°C(TIN) Δ

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK




Ordering Information

1215-24 XX XX R XXX C 0 XX Δ

Δ No. of Pins Per Row: 04-40
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin, SM=Matte Tin
 Pin Length(Short) Standard: L=A+B+C+D+1.0
 Insulator Material: C=PA9T
 Packing: 0=PE Bag, T=Tube
 Series No. 01-99

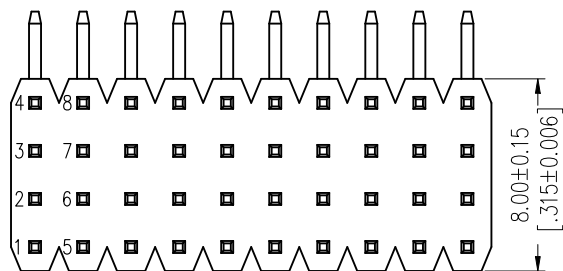

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

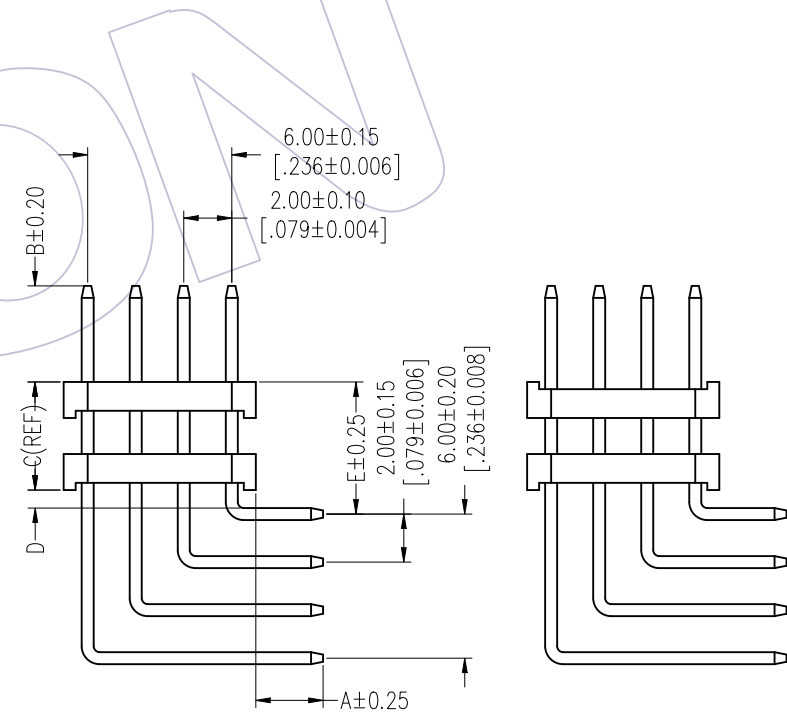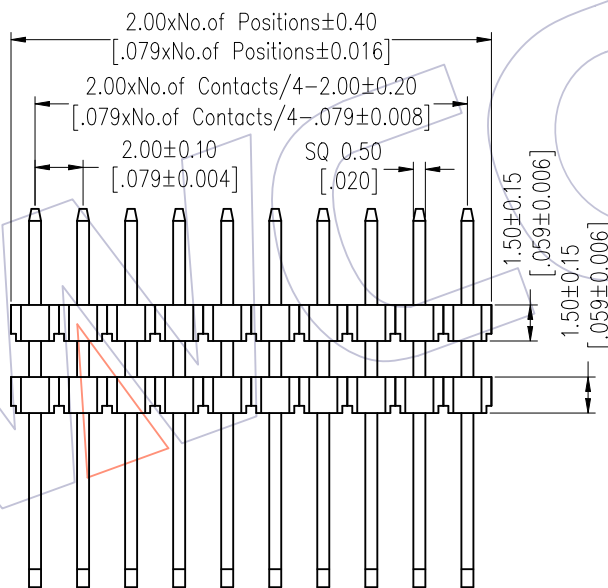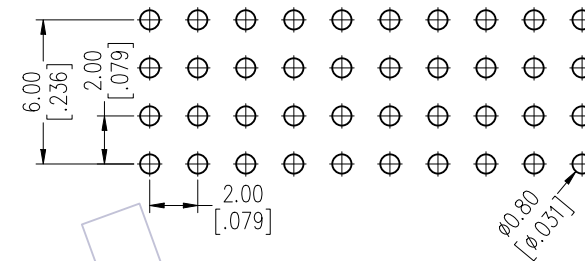

TYPE 1 TYPE 2

Item	Pin Length	A	D	B	E	Mating
Standard	---	2.80	0.75	4.00	---	2263
Alternate						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A3	2020/06/12	Modify Pin 04~40P	Δ Du Ying	OPERATION	DRAW	2020/06/12	UNIT	mm	1215-24XXXXRXXXCOXX Δ
A2	2019/03/04	Modify	Δ Ding	x.X ±0.40	DRAW		SIZE	A4	TITLE:
A1	2018/01/18	Modify P/N	Δ -----	x.XX ±0.25	CHECK		SHEET	1/1	PH2.00 FOUR ROW DOUBLE PLASTIC 90° H=1.5 CONCAVE BENDING
A0	2012/04/18	NEW	-----	x.XXX ±0.15	CHECK		PROJ.		Customer NO.
				Angle ± 3°	APPROVE				
				DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com