
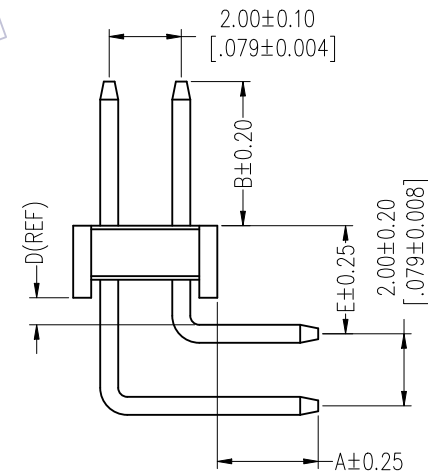
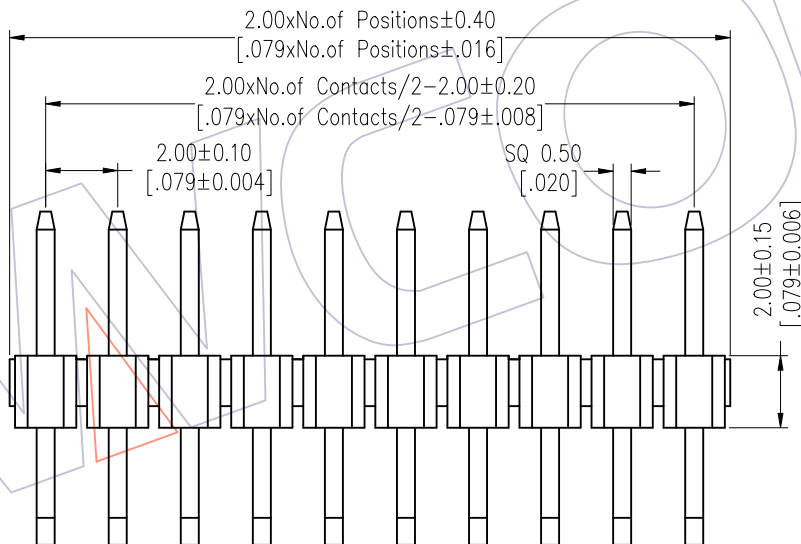
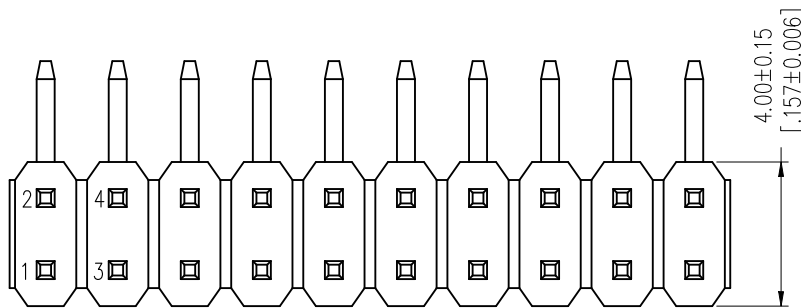


HSF

NOTES:
 Rated Current: 2.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

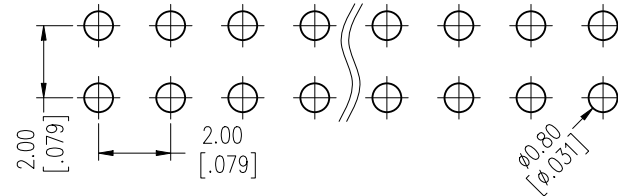

Ordering Information

1220-12 XX XX R XXX C 0 XX

No. of Pins	Contact Plating	Pin Length(Short)	Insulator	Packing	Series No.
Per Row: 02-40	G0=Gold Flash	L=A+B+D+3.0	Material	0=PE Bag	01-99
	G3=10u"Gold	Standard: 105=10.5	C=PA9T	T=Tube	
	G4=15u"Gold				
	G5=30u"Gold				
	S0=Gold Flash/Tin				
	S3=10u"Gold/Tin				
	S4=15u"Gold/Tin				
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

Item	Pin Length	A	E	B	Mating
Standard	10.50	2.80	3.00	4.00	2240 2243 2263 2272
Alternate					

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
X.X ±0.40	<i>Liu</i>	2018.01.19	UNIT mm		1220-12XXXXRXXXC0XX
X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE:
X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		PH2.00 DUAL ROW 90°H=2.0 CONCAVE BENDING
Angle ± 3°			PROJ.		Customer NO.
DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2018/01/19	Modify P/N	△
A0	2012/04/26	NEW	-----