
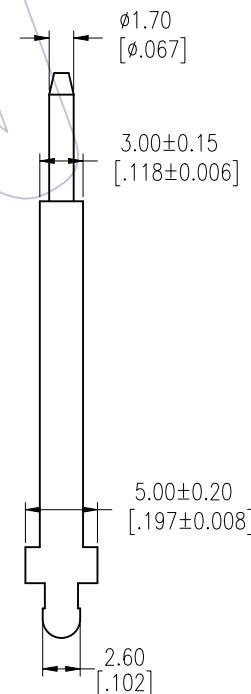
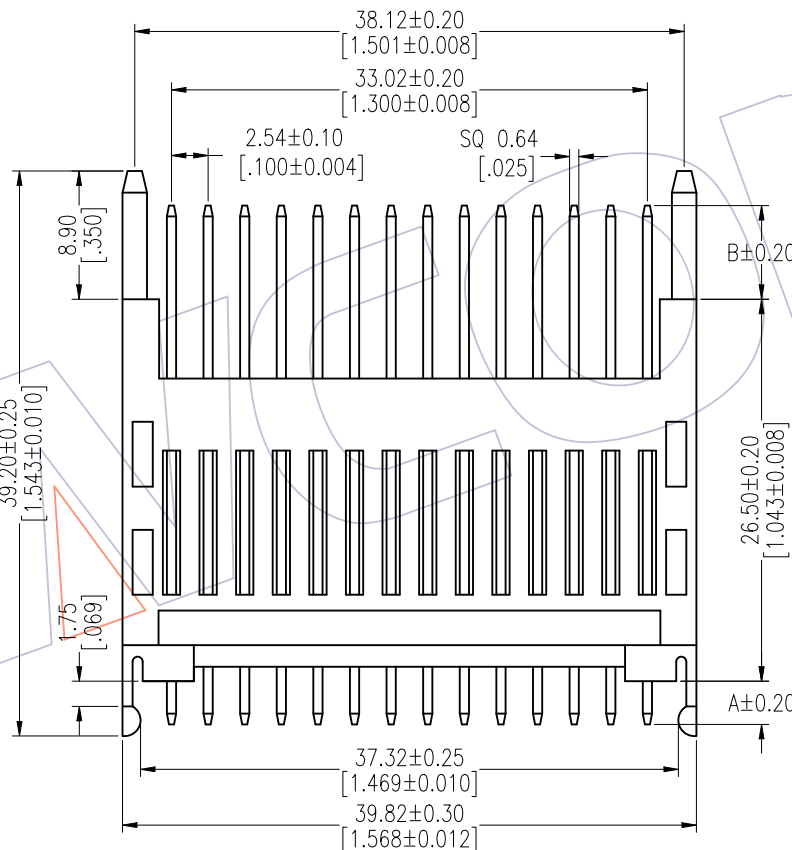
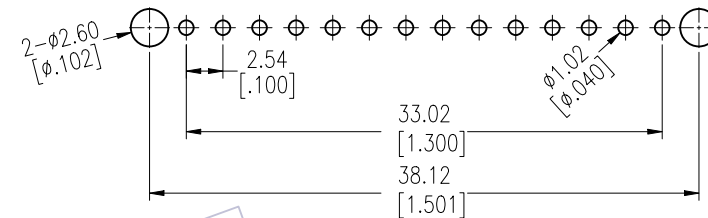


# HSF

NOTES:  
 Rated Current:3.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:5000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)



## Ordering Information

11260-21 14 XX S XXX C 0 XX

Contact Plating	Pin Length	Insulator Material	Packing	Series No.
G0=Gold Flash	L=A+B+26.5	0=PE Bag	A=Tray	01~99
G3=10u"Gold	Standard:360=36.0	C=PA9T		
G4=15u"Gold				
G5=30u"Gold				

Item	Pin Length	A	B
Standard	36.00	3.00	6.50
Alternate			

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
x.x ±0.40	Ruipeng	2018/01/22	UNIT	mm	11260-2114XXSXXX0XX
x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	PH2.54 1*14P 180°H=26.5
Angle ± 3'			PROJ.		Customer NO.
DIM TOL					

# WCON

Http: www.wcon.com

WCON-Dongguan	WCON-Kunshan
Tel: +86 769 85358920	Tel: +86 512 57468408
Fax: +86 769 85358915	Fax: +86 512 57468468
E-mail: sales@wcon.com	E-mail: salesks@wcon.com