

HSF



NOTES:
 Rated Current: 3.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK



Ordering Information

1125-22 XX XX R XXX C 0 XX

No. of Pins Per Row: 02~40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length(Short) L=A+B+D1+D2+5.3 Standard:	Insulator Material C=PA9T	Packing 0=PE Bag T=Tube	Series No. 01~99
-------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------	---------------------------------	-------------------------------	---------------------

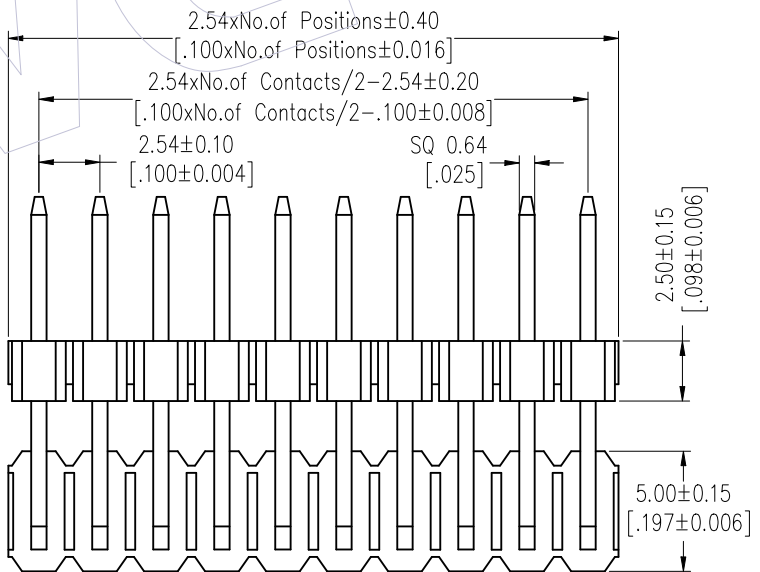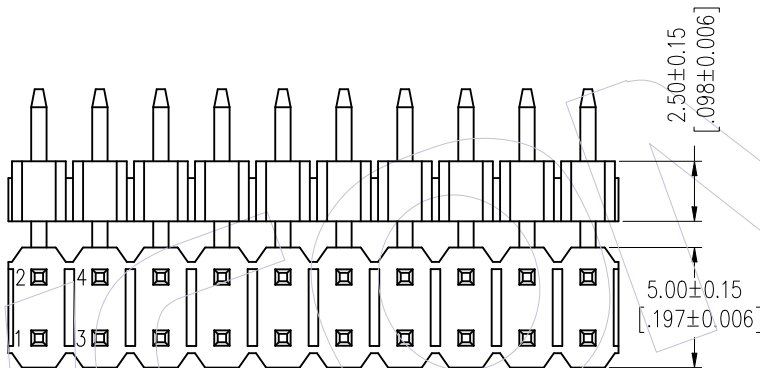

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

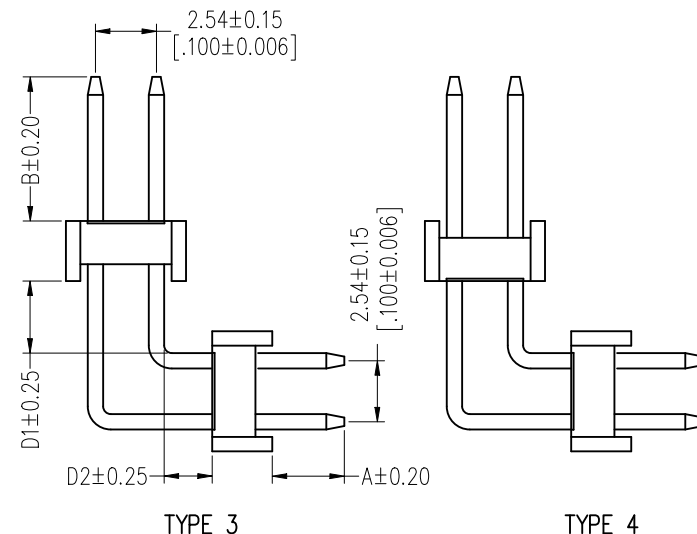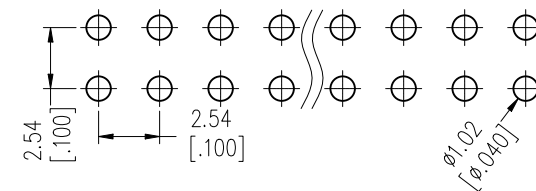

Item	Pin Length	A	D1	B	D2	Mating
Standard	---	3.00	---	6.00	---	2171 2185
Alternate						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A3	2022/08/26	TYPE 1/2 → TYPE 3/4		x.x ±0.40	XSR	2018/06/02	UNIT mm		1125-22XXXXRXXXCOXX
A2	2018/06/02	Cancel PBT & Modify P/N	A2	x.xx ±0.25	CHECK	DATE	SIZE A4		TITLE: PH2.54 DUAL ROW DOUBLE PLASTIC 90° MIDDLE BENDING H=2.5
A1	2018/01/22	Modify P/N	A1	x.xxx ±0.15			SHEET 1/1		
A0	2012/05/28	NEW	-----	Angle ± 3°	APPROVE	DATE	PROJ.		Customer NO.
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
-------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------