

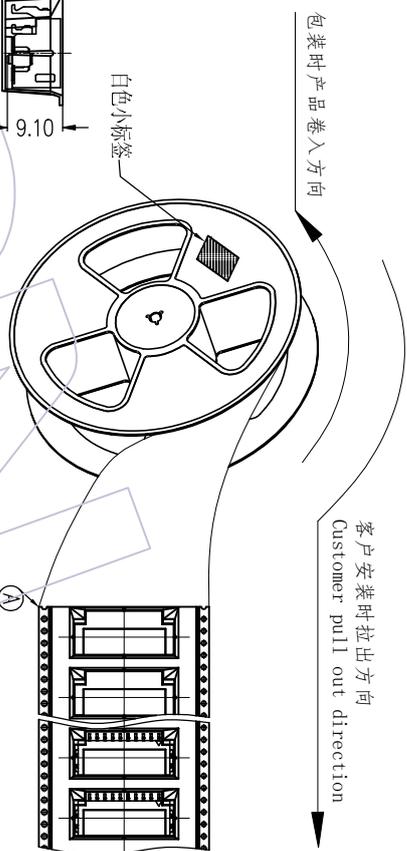




HSHF

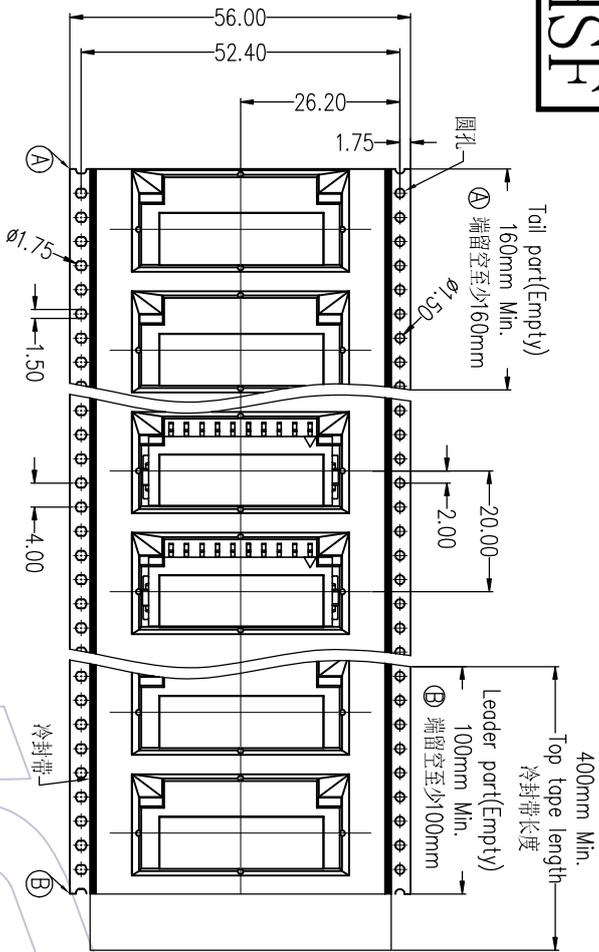

No.1: 产品包装前, 注意载带要留空160mm以上, 将产品放入载带凹槽后, 用盖带封装, 注意: 盖带与承载带的拉力30g~120g

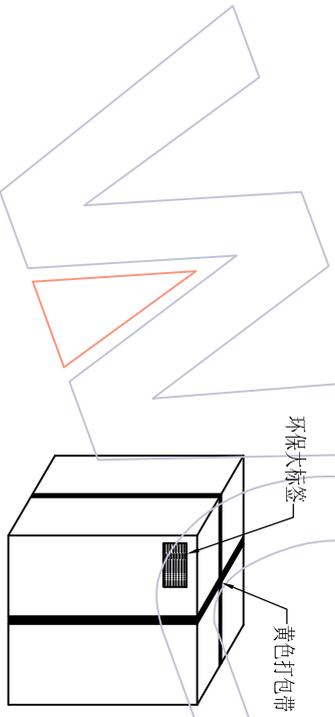

外箱: CTN-18K

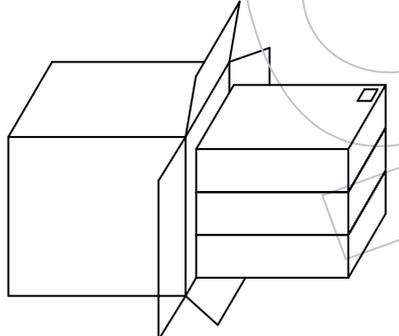

内箱: CTN-18E

No.4: 封箱, 打包, 贴标签。

No.3: 将内箱装入外箱 (3内箱/外箱) 注意统一标签方向

No.2: 将卷盘套上PE-32防水袋, 放入1包干燥剂, 真空机封口后装入内箱, 用封箱胶封装好, 并贴上标签。

Pin	载带料号	W	S	F	PCS/Reel	PCS/内箱	PCS/外箱
2*5P	TR3915-M2010Z08701	44.0±0.30	40.4±0.10	20.20±0.20	300	600	1800
2*10P	TR3915-M2020Z08701	56.0±0.30	52.4±0.15	26.20±0.15	300	300	900

变更日期	变更日期	变更说明
A1	2020/04/24	修改产品视图
A0	2019/01/28	NEW

ENGINEERING		DRAW		SCALE	
XX	±0.20	设计	苏珊	FIT	2020/04/24
XX	±0.20	DESIGN		mm	
X.XXX	±0.10	审核		A4	
Angle	± 2°	CHECK		1/1	
DIM	TOL	核准		PROJ.	

WCON

WCON ELECTRONICS (GUANGDONG) CO., LTD

料号 PART NO. 3915-PXX-2ZXXWDXR1

品名 TITLE: LCS Connector- 双排90° SMT 2*6, 2*10P Plug 卷装规范

1 2 3 4 5 6 7 8 9 10