

HSF

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au over Ni
 Insulator Material: PA9T+33%GF UL94V-0

Ordering Information




2321-2 XX M XX CUN X 3

No. of Pins per Row: 02-50Pin

Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold

Packing:
 T=Tube
 P=Tube+CAP
 R=Tape&Reel+CAP

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

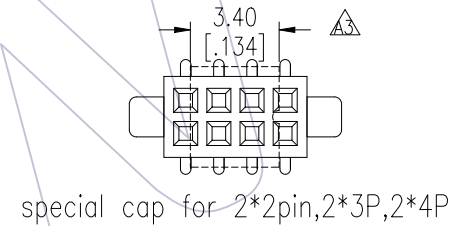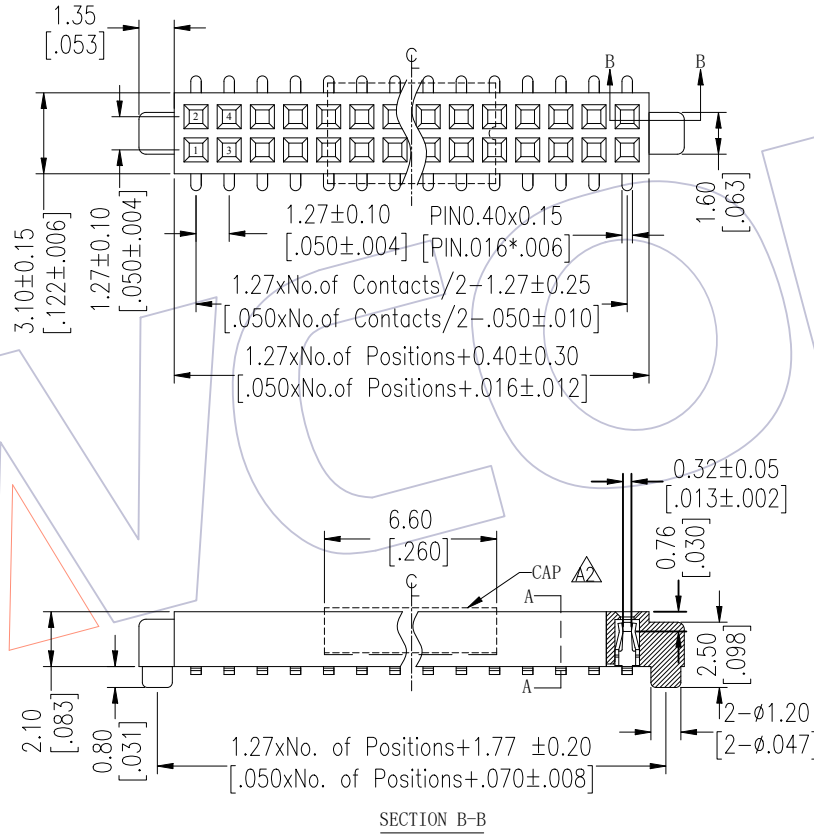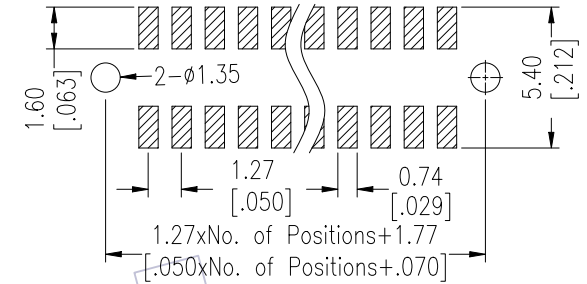

Item	Pitch	Mating
Standard	1.27	1310/1315/1320
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	SCALE	FIT	PART NO.
A4	2023/02/03	Modify Flatness	XSR	OPERATION				SCALE	FIT	PART NO.
A3	2016/06/17	Modify CAP 3.00 → 3.40	-----	x.x	±0.40			UNIT	mm	2321-2XXMXXCUNX3
A2	2014/12/30	Modify CAP	-----	x.xx	±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/07/05	NEW	-----	x.xxx	±0.15			SHEET	1/1	1.27mm DUAL FEMALE HEADER SMT WITH OUTSIDE POST
				Angle	± 3°	APPROVE	DATE	PROJ.		Customer NO.

△△	Pin(Per Row)	2-15P	16-30P	31-50P
	M	0.10	0.15	0.18

WCON

Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: salesks@wcon.com