

HSF

Recommended P.C.B Layout (Top Side) (PCB BOARD TOLERANCE±0.05)

NOTES:


- Current Rating: 3.0AMP
- Contact Resistance: 30mΩ max
- Withstand Voltage: 1000V AC/DC
- Insulation Resistance: 1000MΩ
- Operation Temperature: -55°C~+105°C

- Contact Material: Phosphor Bronze
- Contact Plating: Au and Sn over Ni
- Fixing Material: Phosphor Bronze
- Fixing Plating: Sn over Ni
- Housing Material: PBT+30% G.F(UL94V-0)
- Cover Material: PBT+30% G.F(UL94V-0)

Ordering Information

3410-3 XX X FR SX X A 2

- No. of Pins Per Row: 10pin, 16pin, 32pin
- Rows with Contacts: A=a+b+c, B=a+b, C=a+c, D=a
- Contact Plating: S0=Gold Flash/Tin, S1=3u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
- Packing: A=Tray
- W=With Lock, N=without Lock

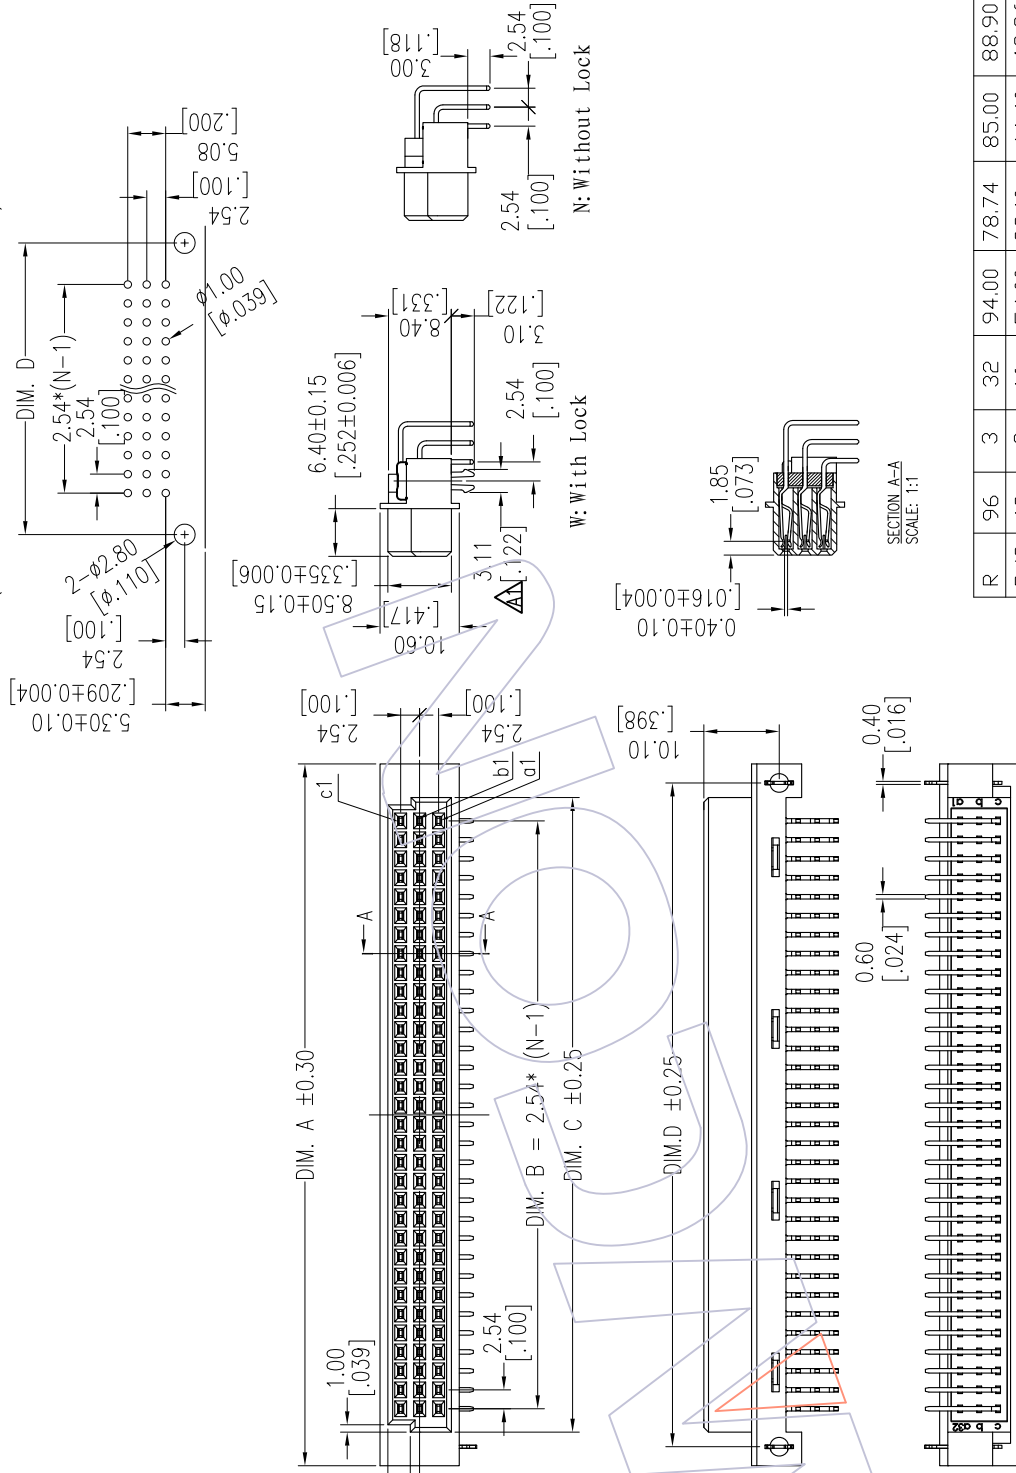

SECTION A-A
SCALE: 1:1

R	96	3	32	94.00	78.74	85.00	88.90
R/2	48	3	16	54.00	38.10	44.40	48.26
R/3	30	3	10	38.10	22.86	29.10	33.02
TYPE	POS.	ROWS	N	DIM.A	DIM.B	DIM.C	DIM.D

PART NO.		3410-3XXXFRSXXA2	
DRAW		JYHuang	
DATE		2014/08/12	
OPERATION		X.X ±0.40	
CHECK		X.XX ±0.25	
APPROVE		X.XXX ±0.15	
CHANGE		Angle ± 3'	
DIMENSION		DIM TOL	
REV	DATE	MODIFICATION DESCRIPTION	
A1	2014/08/12	Modify the dim	
A0	2014/05/29	NEW	

WCON-Kunshan
Http: www.wcon.com
WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 512 57468408
E-mail: sales@wcon.com

TITLE:
2.54PITCH DIN 41612
R, R/2, R/3 TYPE FEMALE DIP=3.0

Customer NO.