


# HSF


NOTES:  
 Rated Current:3A  
 Rated Voltage:250V AC/DC  
 Contact Resistance:20mΩ max  
 Withstand Voltage:1000V AC/Minute  
 Insulation Resistance:1000MΩ min  
 Operation Temperature:-25℃ to+85℃

Contact Material:Brass  
 Contact Plating:Au Or Sn over Ni  
 Insulator Material:PA46+15%G.F (UL94V-0)

掏料槽依PIN数变化,无功能影响

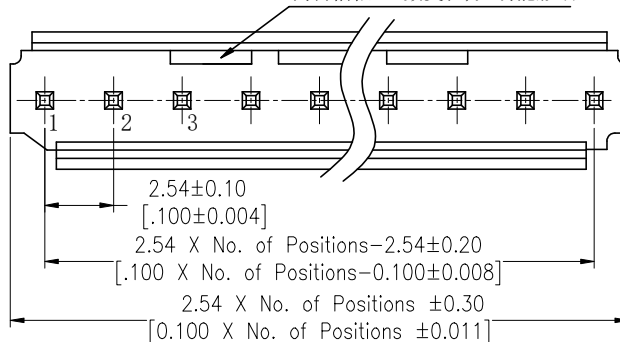

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)


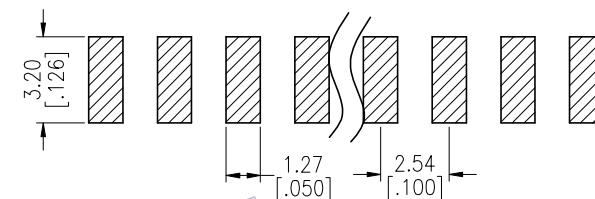



## Ordering Information

WF2547 - 1 WZ XX X X 1

No. of Row Single Row  
 No. of pins 02P-20P  
 Contact Plating  
 S0=Gold Flash/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin  
 G0=Gold Flash  
 G3=10u"Gold  
 G4=15u"Gold  
 G5=30u"Gold  
 SM=Matte Tin  
 Color  
 B=Black  
 T=Natural  
 Packing  
 R=REEL  
 T=TUBE

SQ0.64±0.02  
 [.025±0.001]

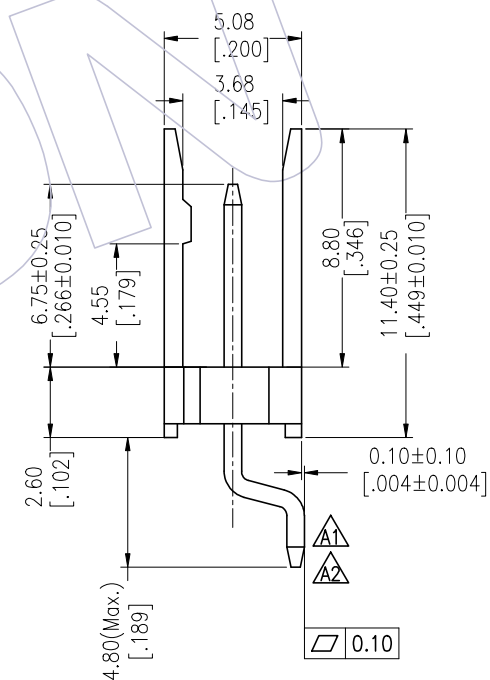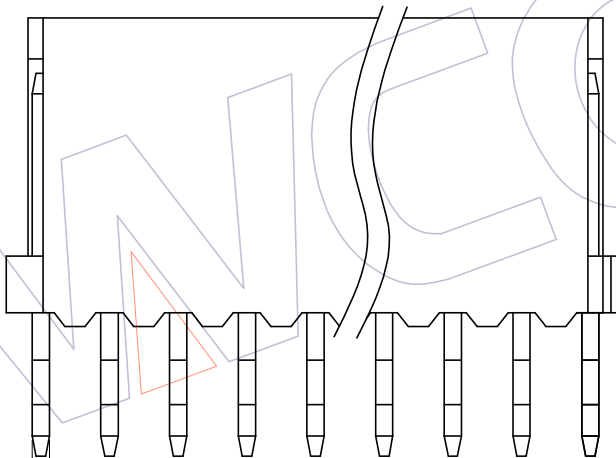

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	 <a href="http://www.wcon.com">Http: www.wcon.com</a>
A2	2015/01/05	修改端子SMT脚形状		x.x ±0.40	JYHuang	2015/01/05	UNIT	mm	WF2547-1WZXXXXX1	
A1	2013/10/24	0.10 <sup>+0.10</sup> / <sub>-0.05</sub> → 0.10±0.10, 修改端子SMT脚形状		x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.54 WAFER SINGLE ROW 90° SMT "T" TYPE	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: wconk@wcon.com
AO	2012/09/19	NEW		x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.	
				Angle ± 3'			PROJ.			
				DIM TOL						