
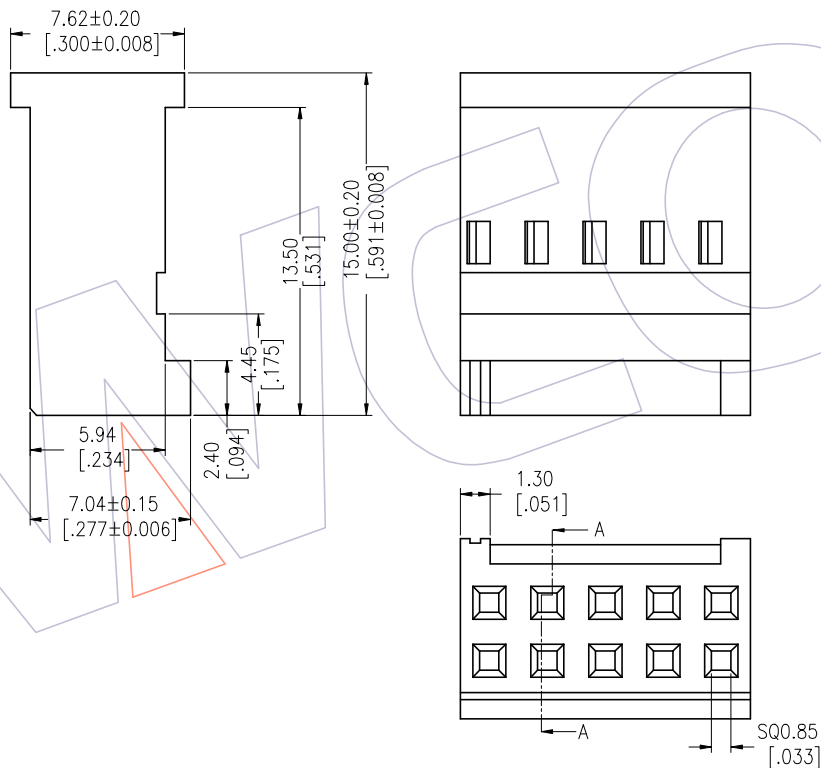


HSF

NOTES:
 Rated Current:3.0A
 Contact Resistance:20mΩ max
 Withstand Voltage:1000V AC/Minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25℃ to+85℃

Insulator Material:PBT+30%G.F UL94V-0
 Used with:WF2547-T
 Mated with:WF2547-Wafer

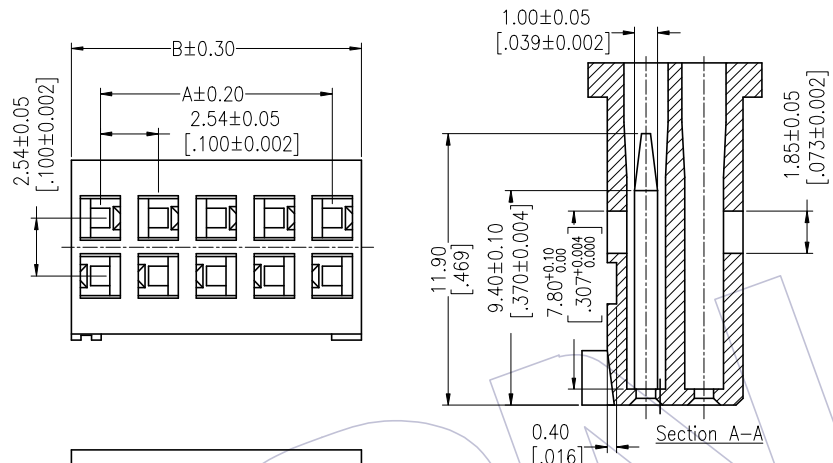

Dimensional & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
2x02	WF2547-2H02X01	2.54	5.08
2x03	WF2547-2H03X01	5.08	7.62
2x04	WF2547-2H04X01	7.62	10.16
2x05	WF2547-2H05X01	10.16	12.70
2x06	WF2547-2H06X01	12.70	15.24
2x07	WF2547-2H07X01	15.24	17.78
2x08	WF2547-2H08X01	17.78	20.32
2x09	WF2547-2H09X01	20.32	22.86
2x10	WF2547-2H10X01	22.86	25.40
2x11	WF2547-2H11X01	25.40	27.94
2x12	WF2547-2H12X01	27.94	30.48
2x13	WF2547-2H13X01	30.48	33.02
2x14	WF2547-2H14X01	33.02	35.56
2x15	WF2547-2H15X01	35.56	38.10
2x16	WF2547-2H16X01	38.10	40.64
2x17	WF2547-2H17X01	40.64	43.18
2x18	WF2547-2H18X01	43.18	45.72
2x19	WF2547-2H19X01	45.72	48.26
2x20	WF2547-2H20X01	48.26	50.80

Ordering Information

WF2547 - 2 H XX X 0 1

No. of pins
02P~20P

Color
E=Beige
W=White
B=Black
U=Blue

Packing
0=PE Bag

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2022/04/22	Add Part No.	Du Ying	x.x ±0.40	Du Ying	2022/04/22	UNIT	mm inch	SEE TAB
A1	2013/11/14	Add 2X02P Information	JYHuang	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
AO	2012/09/28	NEW	---	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	2.54 Housing Dual Row "T"Type
				Angle ± 3'			PROJ.	Customer NO.	
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com