




HSF

NOTES:
 Rated Current:3.0A
 Contact Resistance:20mΩ max
 Withstand Voltage:1000V AC/Minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25℃ to+85℃

Contact Material:Brass
 Contact plating:Au Or Sn Over Ni
 Insulator Material:PA66(UL94V-0)

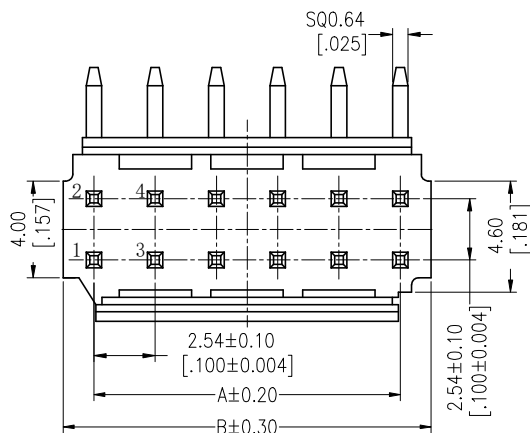

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

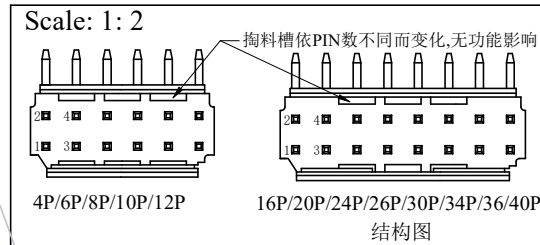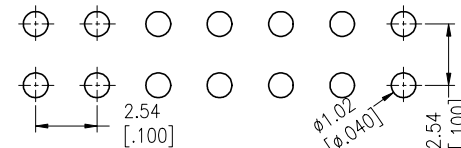


Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
2x02	WF2547-2WR02XX1	2.54	5.08
2x03	WF2547-2WR03XX1	5.08	7.62
2x04	WF2547-2WR04XX1	7.62	10.16
2x05	WF2547-2WR05XX1	10.16	12.70
2x06	WF2547-2WR06XX1	12.70	15.24
2x07	WF2547-2WR07XX1	15.24	17.78
2x08	WF2547-2WR08XX1	17.78	20.32
2x09	WF2547-2WR09XX1	20.32	22.86
2x10	WF2547-2WR10XX1	22.86	25.40
2x11	WF2547-2WR11XX1	25.40	27.94
2x12	WF2547-2WR12XX1	27.94	30.48
2x13	WF2547-2WR13XX1	30.48	33.02
2x14	WF2547-2WR14XX1	33.02	35.56
2x15	WF2547-2WR15XX1	35.56	38.10
2x16	WF2547-2WR16XX1	38.10	40.64
2x17	WF2547-2WR17XX1	40.64	43.18
2x18	WF2547-2WR18XX1	43.18	45.72
2x19	WF2547-2WR19XX1	45.72	48.26
2x20	WF2547-2WR20XX1	48.26	50.80

Ordering Information

WF2547 - 2 WR XX XX X X 1

No. of Row: Dual Row
 No. of pins: 02P-20P
 Contact Plating: S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, Blank=Tin
 Color: W=White, U=Blue, B=Black
 Packing: 0=PE Bag, T=Tube

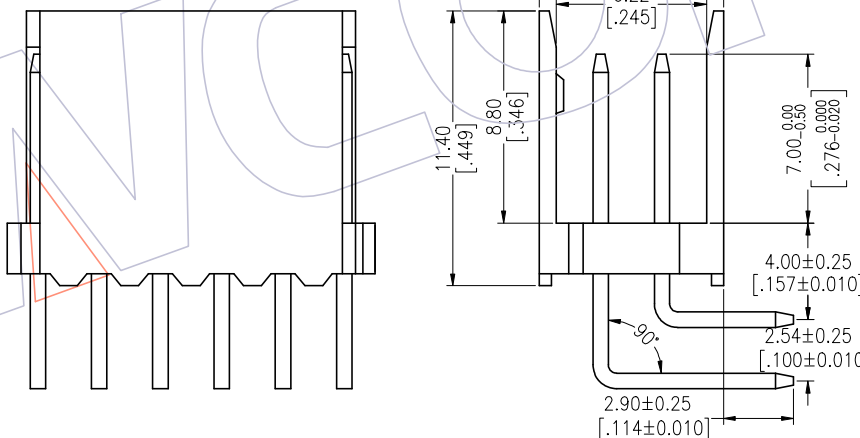

OPERATION		DRAW Du Ying	DATE 2022/05/17	SCALE	FIT	PART NO. SEE TAB
x.X	±0.40					
x.XX	±0.25	CHECK	DATE	UNIT	mm inch	TITLE: "T"TYPE 2.54 WAFER 90° DUAL ROW
x.XXX	±0.15					
Angle	± 3'	APPROVE	DATE	SHEET	1/1	Customer NO.
DIM	TOL					
PROJ.						

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2022/05/17	Add Part No.	Du Ying
AO	2012/09/08	NEW	JYHuang