HSF

NOTES:
Rated Current:3A
Contact Resistance:20mΩ max
Withstand Voltage:1000V AC/Minute
Insulation Resistance:1000MΩ min
Operation Temperature:-25℃ to+85℃

Contact Material:Brass
Contact plating:Au Or Sn Over Ni
Insulator Material:PA66(UL94V-0)

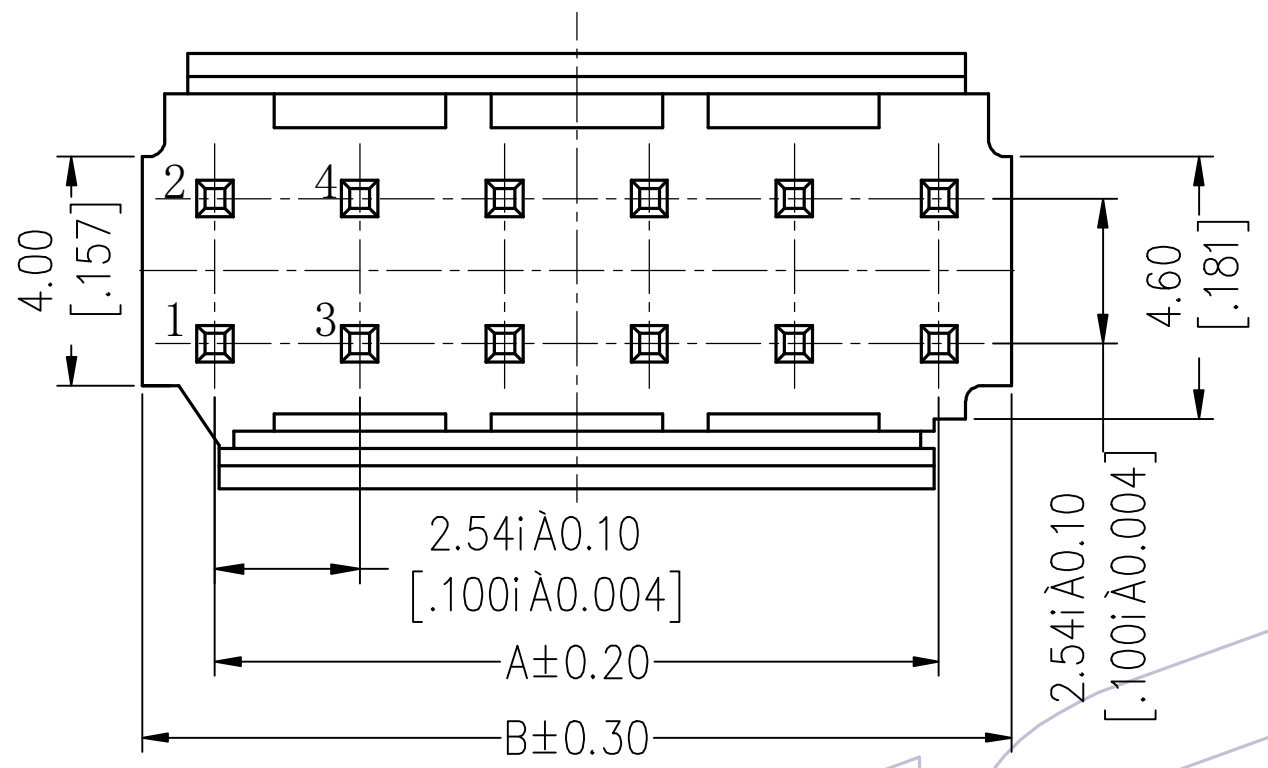

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

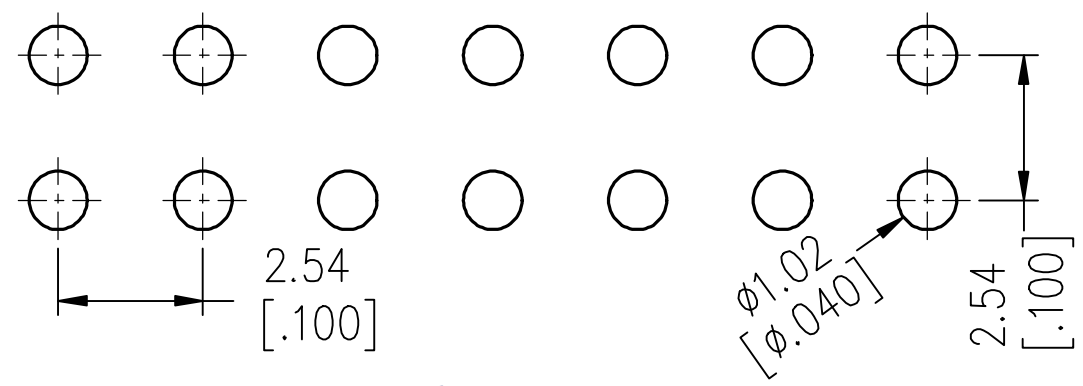

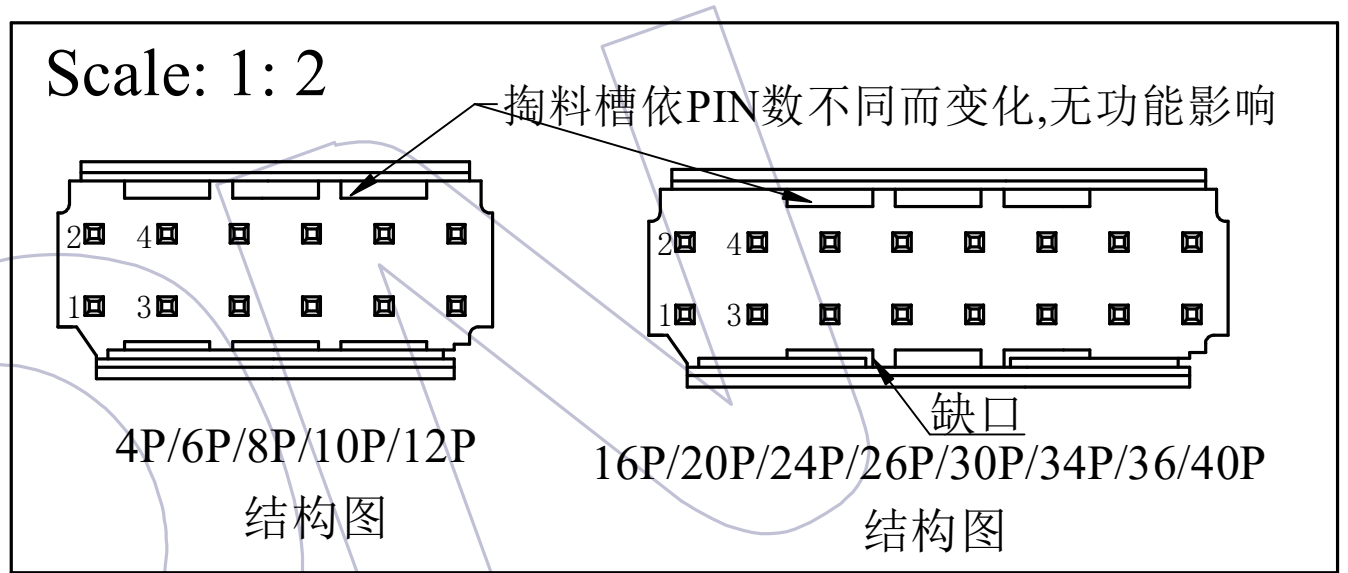

Ordering Information

WF2547 - 2 WS XX XX X X 1

- 2: No.of Row — Dual Row
- XX: No.of pins — 02P~20P
- XX: Contact Plating — S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, Blank=Tin
- X: Color — W=White, U=Blue, B=Black
- X: Packing — 0=PE Bag, T=Tube

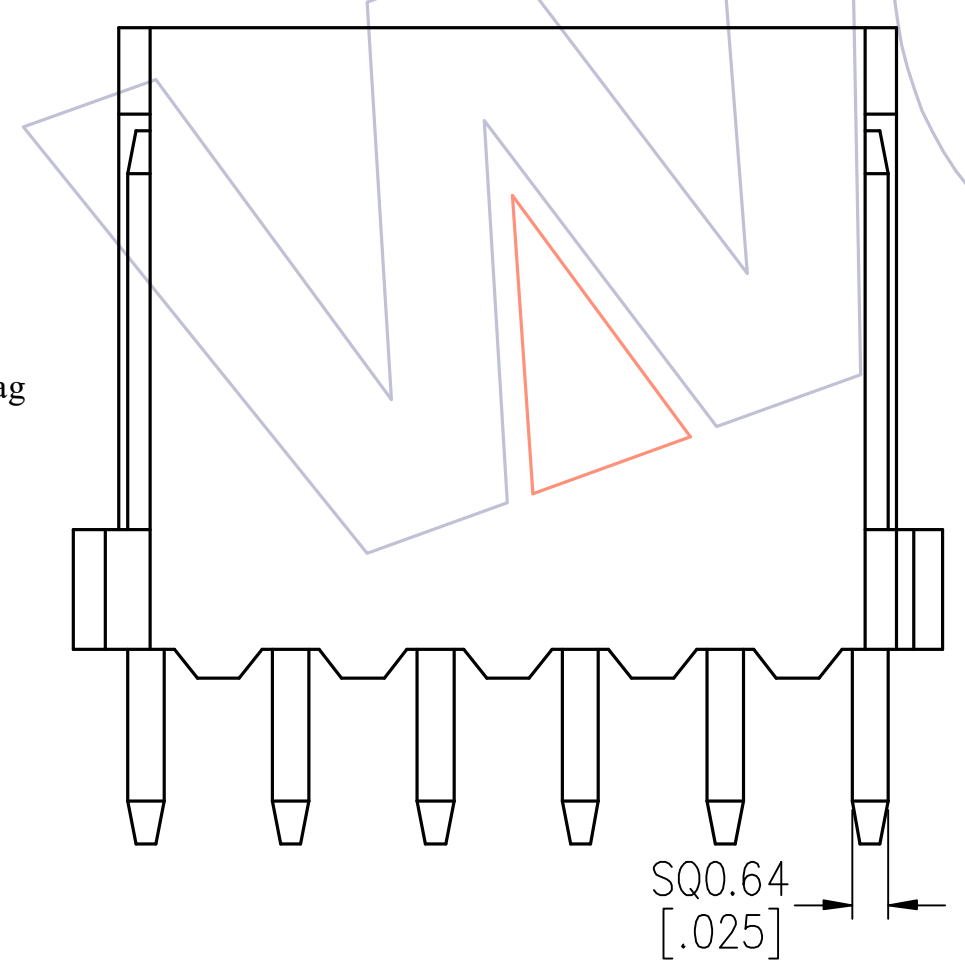

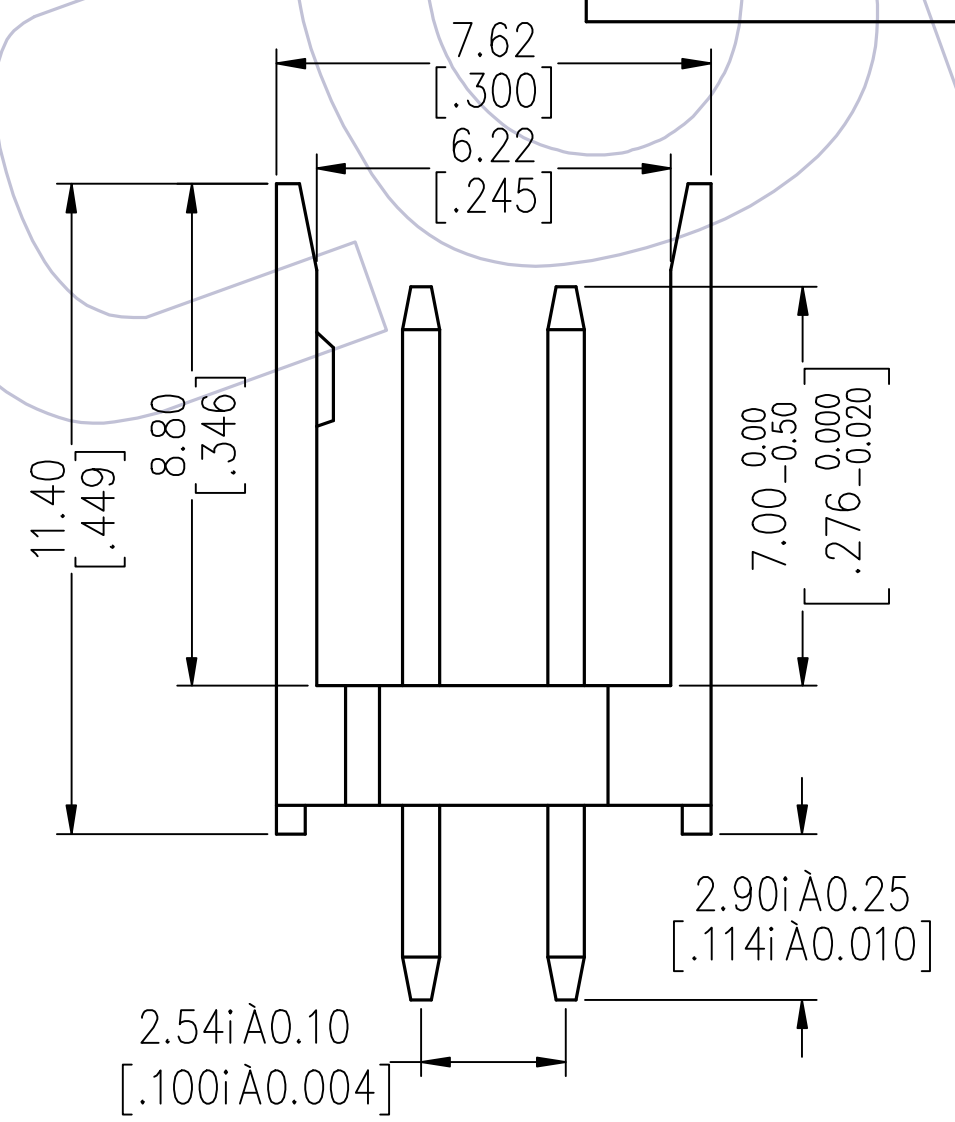

Specification & Ordering Information:

Circuit	Part No.	Dimension A	Dimension B
2x02	WF2547-2WS02XX1	2.54	5.08
2x03	WF2547-2WS03XX1	5.08	7.62
2x04	WF2547-2WS04XX1	7.62	10.16
2x05	WF2547-2WS05XX1	10.16	12.70
2x06	WF2547-2WS06XX1	12.70	15.24
2x08	WF2547-2WS08XX1	17.78	20.32
2x10	WF2547-2WS10XX1	22.86	25.40
2x12	WF2547-2WS12XX1	27.94	30.48
2x13	WF2547-2WS13XX1	30.48	33.02
2x15	WF2547-2WS15XX1	35.56	38.10
2x17	WF2547-2WS17XX1	40.64	43.18
2x18	WF2547-2WS18XX1	43.18	45.72
2x20	WF2547-2WS20XX1	48.26	50.80

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/09/08	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW JYHuang	DATE 2012/09/08	SCALE	FIT
CHECK	DATE	UNIT	mm/inch
		SIZE	A4
APPROVE	DATE	SHEET	1/1
		PROJ.	

PART NO.
SEE TAB

TITLE:
"T"TYPE 2.54 WAFER 180° DUAL ROW

Customer NO.

WCON
Http: www.wcon.com
WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com
WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com