

HSP

NOTES:


Rated Current: 3.0AMP
Contact Resistance: 20mΩ max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ min
Operation Temperature: -25 °C to +85 °C

Ordering Information

WF2547 - T X XX 01

Material
B=Brass
P=Phosphor bronze

Contact Plating
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tin

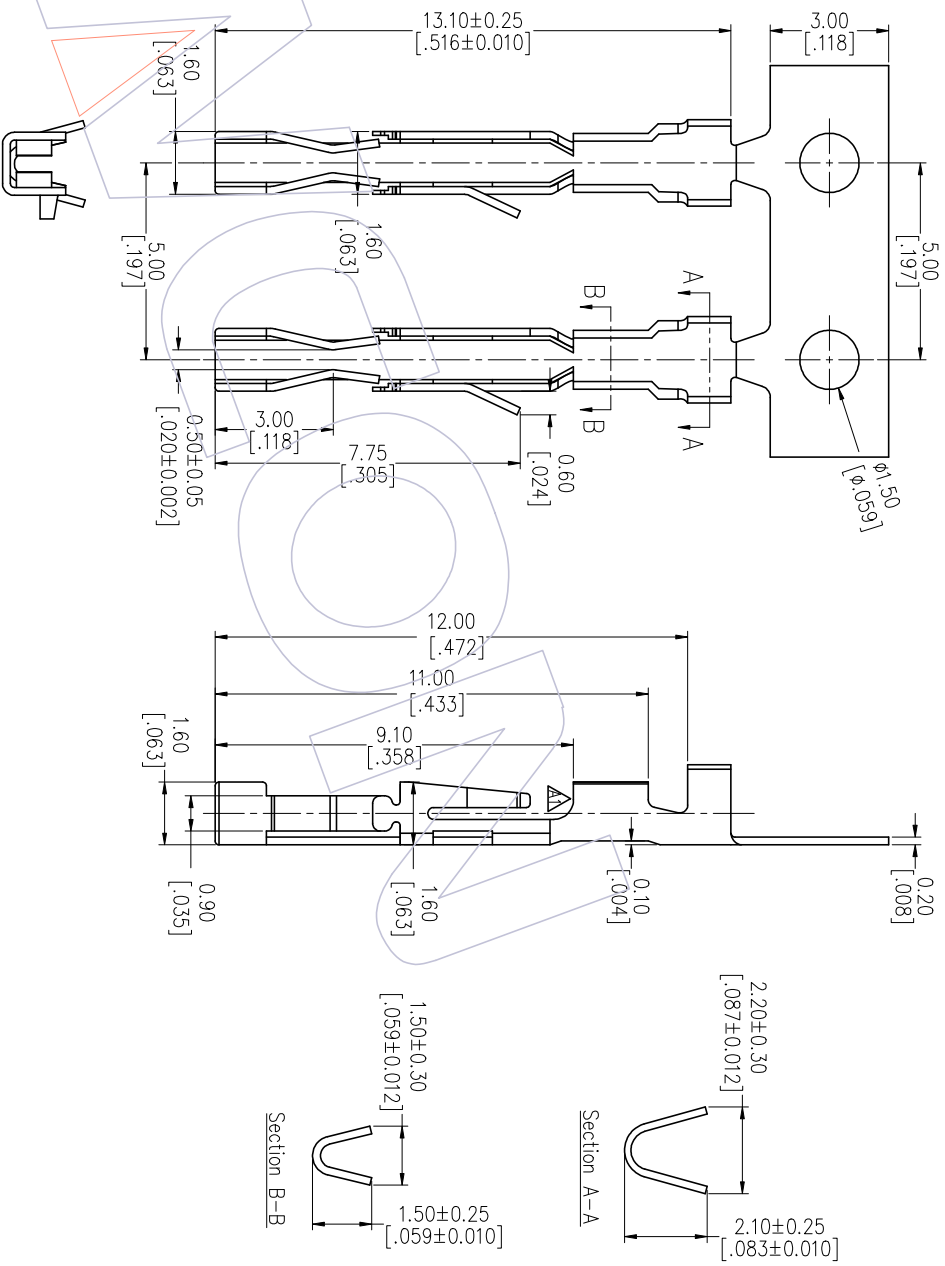

Dimensional & Ordering Information

Part No.	Thickness	Material	Finish	Wire Range	Insulation O.D
WF2547-TBSNO1	0.20	Brass	Tin-Plated	AWG#22~#28	1.50mm(Max.)
WF2547-TPSNO1	0.20	Phosphor bronze	Tin-Plated	AWG#22~#28	1.50mm(Max.)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
				XX ±0.40	Dwg	2017/06/29	mm		SEE TABLE			Http: www.wcon.com	
A1	2017/06/29	Modify		XXX ±0.25	CHECK		A4			"r" TYPE 2.54mm Terminal		Tel: +86 769 85358920	Tel: +86 512 57468408
AO	2012/09/28	NEW		XXXX ±0.15	APPROVE		1/1					Fax: +86 769 85358915	Fax: +86 512 57468468
				Angle ± 3°								E-mail: sales@wcon.com	E-mail: sales@wcon.com
				DIM TOL									

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com