

HSF

NOTES:


Current Rating:3.0A AMP
 Contact Resistance:20milliohm Max
 Withstand Voltage:1000V AC/Minute
 Insulation Resistance:1000Megohm Min
 Operation Temperature:-25°C to +85°C

Housing Material:PBT+30%GF Black(UL94V-0)
 Contact Material:Brass
 Contact plating:Sn over Ni Plating


Ordering Information

WF2548-2 H XX B 0 1

Colour:
 B:Black

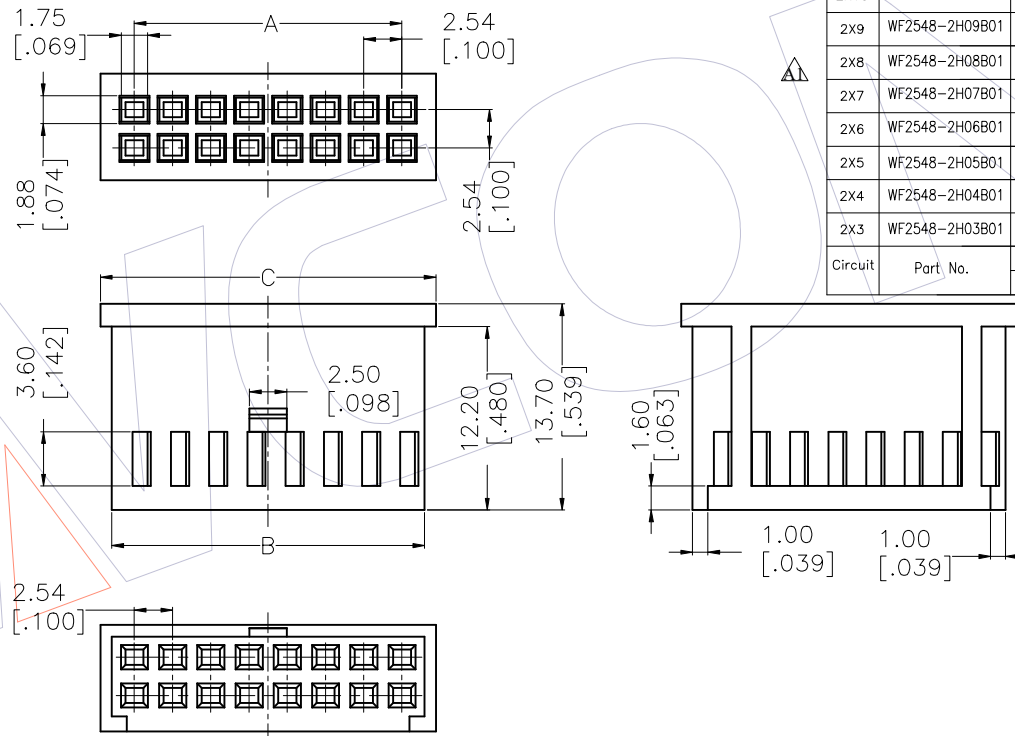

2X22	WF2548-2H22B01	53.34[2.100]	56.4[2.220]	57.90[2.279]
2X21	WF2548-2H21B01	50.80[2.000]	53.86[2.120]	55.36[2.179]
2X20	WF2548-2H20B01	48.26[1.900]	51.32[2.020]	52.82[2.079]
2X19	WF2548-2H19B01	45.72[1.800]	48.78[1.92]	50.28[1.979]
2X18	WF2548-2H18B01	43.18[1.700]	46.24[1.820]	47.74[1.879]
2X17	WF2548-2H17B01	40.64[1.600]	43.70[1.720]	45.20[1.779]
2X16	WF2548-2H16B01	38.10[1.500]	41.16[1.620]	42.66[1.679]
2X15	WF2548-2H15B01	35.56[1.400]	38.62[1.520]	40.12[1.579]
2X14	WF2548-2H14B01	33.02[1.300]	36.08[1.420]	37.54[1.477]
2X13	WF2548-2H13B01	30.48[1.200]	33.54[1.320]	35.04[1.379]
2X12	WF2548-2H12B01	27.94[1.100]	31[1.220]	32.50[1.279]
2X11	WF2548-2H11B01	25.40[.100]	28.46[1.120]	29.96[1.179]
2X10	WF2548-2H10B01	22.86[.900]	25.92[1.020]	27.42[1.079]
2X9	WF2548-2H09B01	20.32[.800]	23.38[.920]	24.88[.979]
2X8	WF2548-2H08B01	17.78[.700]	20.84[.820]	22.34[.879]
2X7	WF2548-2H07B01	15.24[.600]	18.30[0.720]	19.80[.779]
2X6	WF2548-2H06B01	12.7[.500]	15.76[.620]	17.26[.679]
2X5	WF2548-2H05B01	10.16[.400]	13.22[.520]	14.72[.579]
2X4	WF2548-2H04B01	7.62[.300]	10.68[.420]	12.18[.479]
2X3	WF2548-2H03B01	5.08[.200]	8.14[.320]	9.64[.379]
Circuit	Part No.	A	B	C
		Dimension		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.	 Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 769 85358915 E-mail: sales@wcon.com
				X.X	±0.40	DING	1:1	WF2548-2HXXB01	
A1	2017/05/16	MODIFY	△	X.XX	±0.25	CHECK	mm	TITLE:	
A0	2012/11/16	NEW	—	X.XXX	±0.15	APPROVE	inch	2.54mm Double Row Housing	
				Angle	± 3'		SHEET	Customer NO.	
				DIM	TOL		PROJ.		