


HSF

NOTES:
 Rated Current: 3.0AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25℃ to +85℃

Contact Material: Phosphor bronze
 Contact Plating: Au Or Sn Over Ni

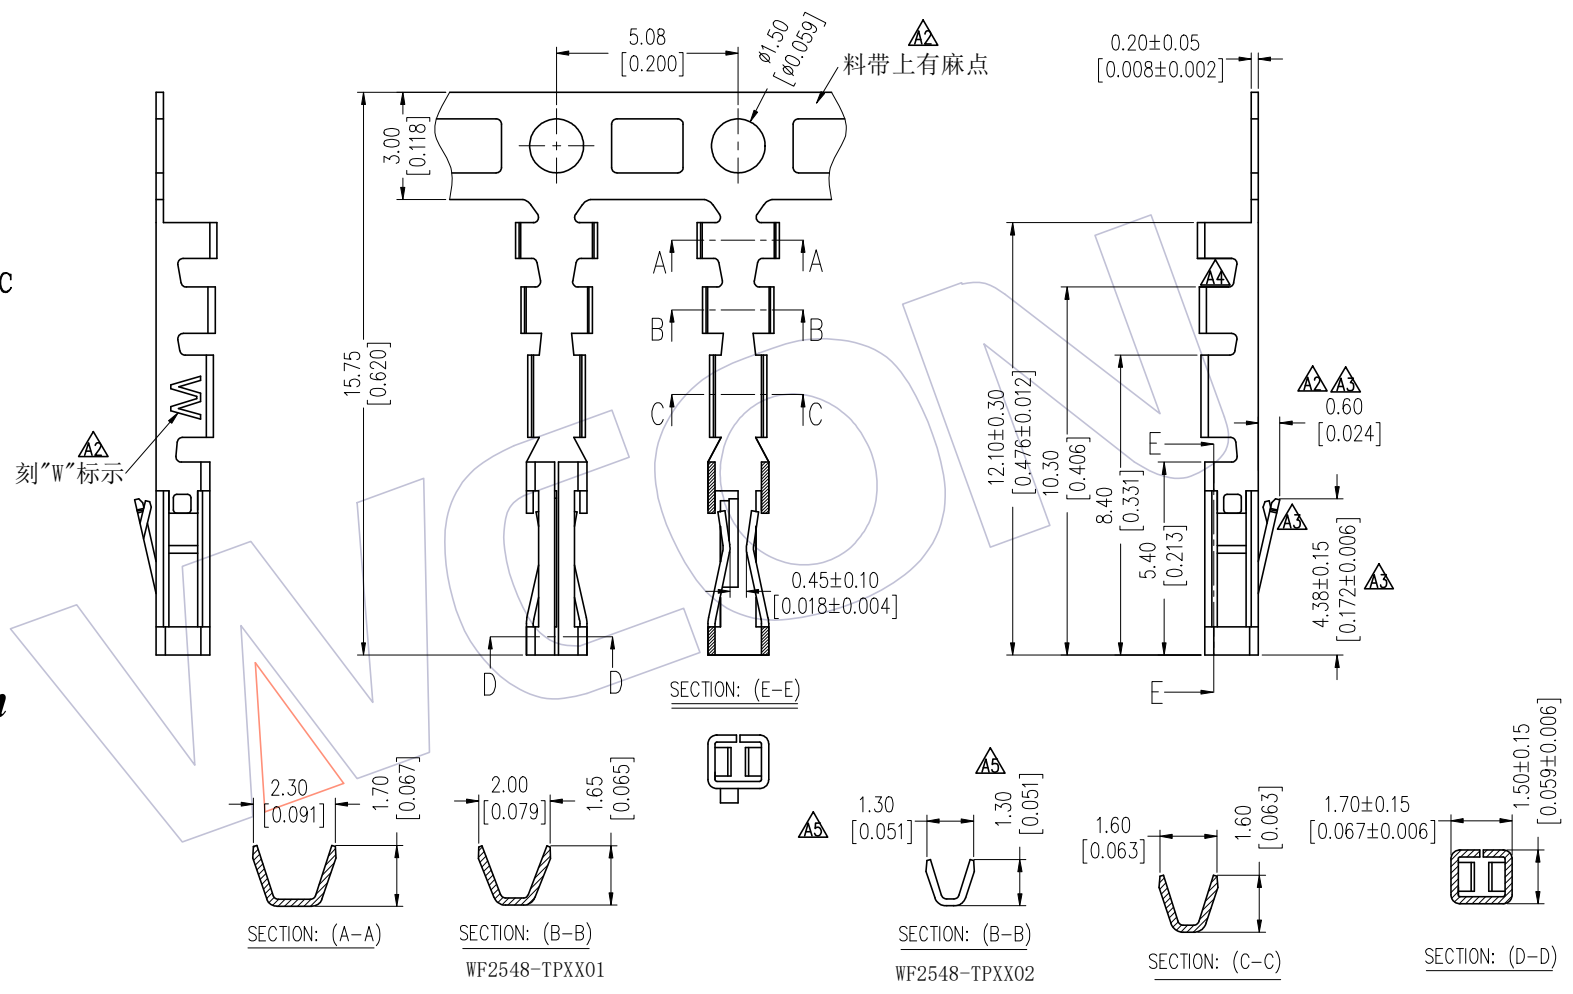

Ordering Information

WF2548-T P XX 0 X

Material
 P=Phosphor Bronze

Contact Plating
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold

SECTION: (A-A)

SECTION: (B-B)

WF2548-TPXX01

SECTION: (B-B)

WF2548-TPXX02

SECTION: (C-C)

SECTION: (D-D)

Dimensional & Ordering Information

Part No.	Thickness	Finish	Material	Wire Range	Insulation O.D
WF2548-TPXX02	0.20	Tin	Phosphor Bronze	AWG#26/28	1.55mm(Max)
WF2548-TPXX01	0.20	Tin	Phosphor Bronze	AWG#24	1.55mm(Max)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A5	2020/09/14	Add WF2548-TPXX02			Ding	2020/09/14			SEE TAB
A4	2018/08/14	Modify		X.X ±0.40	CHECK	DATE	UNIT	mm	TITLE: 2.54mm TERMINAL FEMALE
A3	2018/04/20	Modify		X.XX ±0.25	APPROVE	DATE	SIZE	A4	
A0	2012/09/08	NEW		X.XXX ±0.15		DATE	SHEET	1/1	
				Angle ± 3°			PROJ.		Customer NO.
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com