

HSF

NOTES:
 Rated Current: 7.0AMP.
 Contact Resistance: 20mΩ Max.
 Rated Voltage: 250V
 Operation Temperature: -40℃ to +125℃


Body Material: PBT/PA9T,UL94V-0,BK
 Cover Material: PA9T,UL94V-0,BK
 Contact Material: Brass
 Contact Plating:
 15u" Gold on contact area
 80u" Matte tin on solder area
 30u" Nickel underplating overall

Ordering Information

73040-4 M R 060 X B S4 D A 1 W

4 rows
 MALE
 R=R/A
 060=34P+26P
 A=PBT
 C=PA9T
 B=Brass
 Contact Plating:
 S4=Sel.15u"Gold/Tin
 D=Ports no Sealed &Terminals Sealed
 A=Tray Packing
 Key Option Code
 W=W/T WCON

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

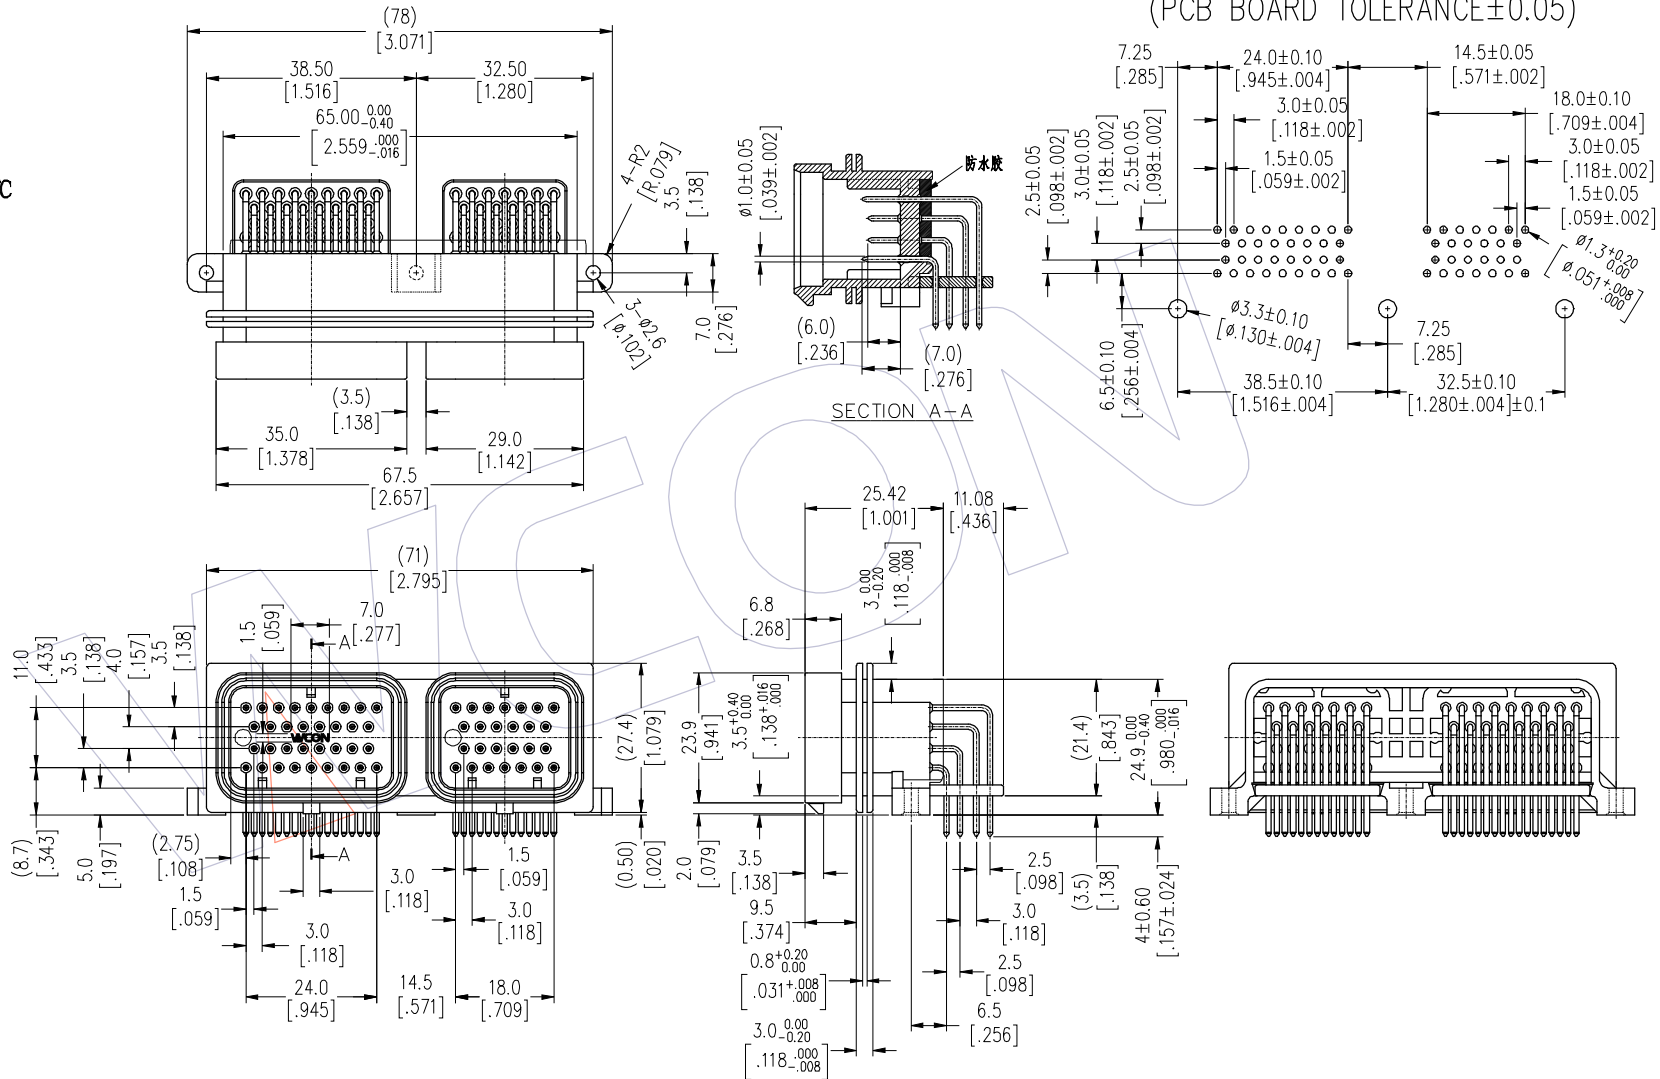

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
				x.	±0.60	XSR	UNIT	mm	73040-4MR060XS4DA1W
				x.x	±0.40	CHECK	SIZE	inch	TITLE:
				x.xx	±0.25	APPROVE	SHEET	A4	3.0*4.0mm,34P+26P
				Angle	± 3°		PROJ.	1/1	SUPER SEAL CONNECTOR
				DIM	TOL				Customer NO.

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com