HSF

NOTES:
Rated Current: 7.0AMP.
Contact Resistance: 15mΩ Max.
Rated Voltage: 1000V AC
Operation Temperature: −40℃ to +125℃

Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Body Material: PA9T UL94V-0 BK

Ordering Information

7 30 40 - 4 M S 026 C B XX X A X W A1

- 4: Four Row
- M: Male
- S: 180°
- No.of pins 026=26P 034=34P
- Insulator Material C=PA9T
- B: Brass
- Contact Plating S4=15u"Gold/ Matte Tin
- B: Don't glue D: glue
- A: Vacuum box
- X: 1,2,3 ... wrial number
- W: Witch WCON LOGO

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)





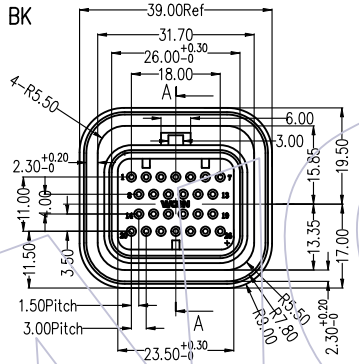



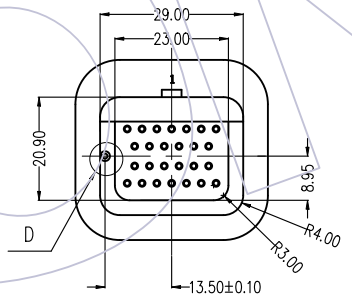



SEC A-A





DETAIL"D"
5:1





DETAIL"C"
5:1



73040-4MS026CBS4BA3W



73040-4MS026CBS4BA4W

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2023/07/20	Update material code	------
A0	2021/10/26	NEW	------

OPERATION	
X.	±0.60
X.X	±0.40
X.XX	±0.25
Angle	± 3°
DIM	TOL

DRAW	kevin-xin	DATE	2023/07/20
CHECK		DATE	
APPROVE		DATE	

SCALE	Fit
UNIT	mm [inch]
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 73040-4MS026CBS4BAXW A1

TITLE: 3.0X4.0mm Pitch,26P 180° SUPER SEAL CONNECTOR

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com