


NOTES:
 Rated Current: 9.0AMP
 Contact Resistance: 30mΩ max
 Withstand Voltage: 1500V AC/minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C

Contact Material: Brass
 Contact Plating: Au Or Sn Over Ni
 Insulator Material: PA66(White Transparent UL94-V2 std)Or PA46(Natutal UL94-V0)

PART NO.	PIN	A	B	Material
WF4201-2WSHXXX2	2*5P 及以下	+0.30 -0.10	+0.40 -0.20	PA46
	2*5P 以上	+0.50 -0.00	+0.60 -0.00	
WF4201-2WSXXX2	2*1P-2*12P	±0.20	±0.30	PA66

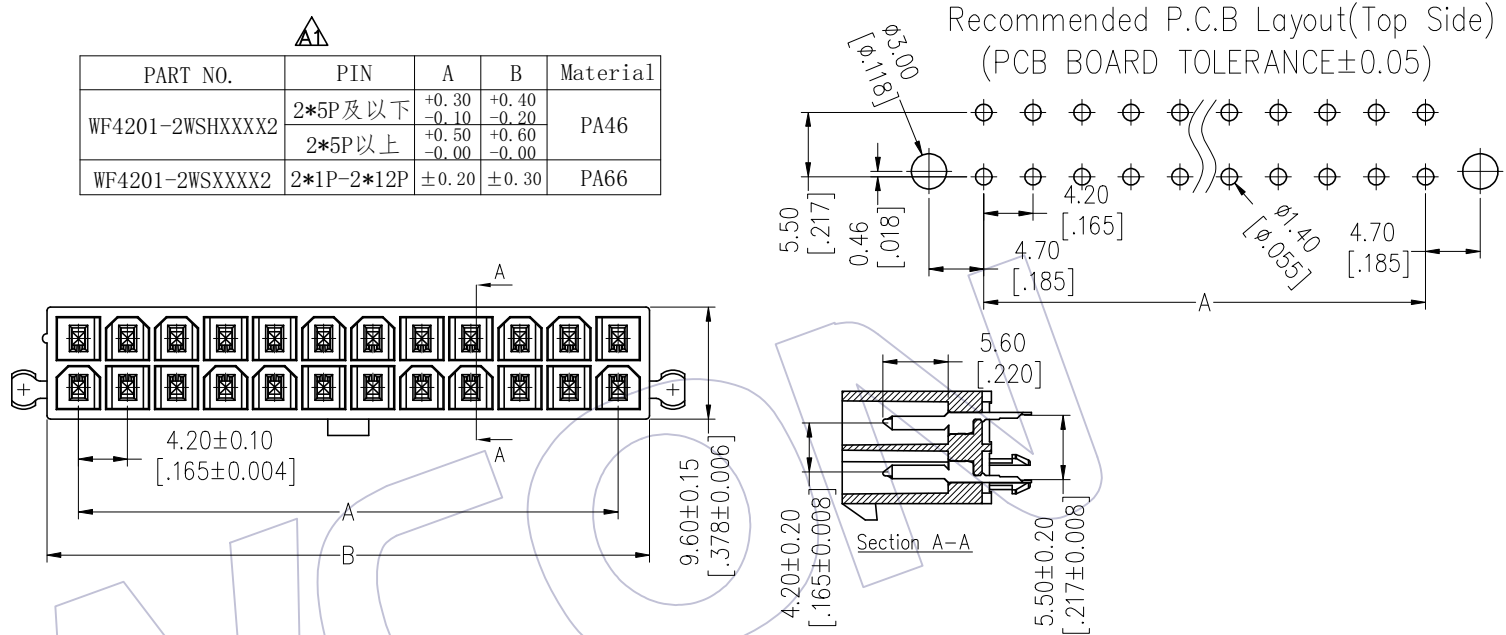

Ordering Information

WF4201 -2WS XX W A 2

No. of Row
Dual Row

No. of pins
01-12P


Contact Plating
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

Insulation Material
 H=PA46
 Blank=PA66

Color
 B=Black
 T=Natural

Packing
 0=PE Bag
 A=Tray

G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 Blank=Tin

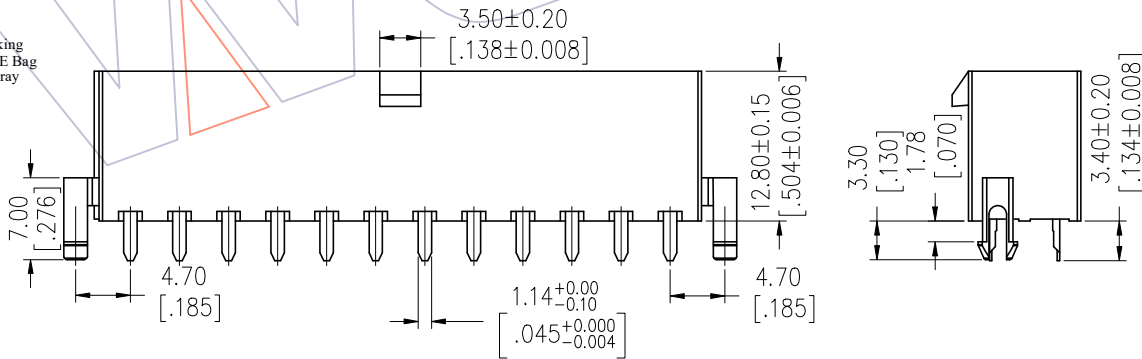

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
2x01	WF 4201-2WS01WX2	---	5.40
2x02	WF 4201-2WS02WX2	4.20	9.60
2x03	WF 4201-2WS03WX2	8.40	13.80
2x04	WF 4201-2WS04WX2	12.60	18.00
2x05	WF 4201-2WS05WA2	16.80	22.20
2x06	WF 4201-2WS06WX2	21.00	26.40
2x07	WF 4201-2WS07WX2	25.20	30.60
2x08	WF 4201-2WS08WX2	29.40	34.80
2x09	WF 4201-2WS09WX2	33.60	39.00
2x10	WF 4201-2WS10WX2	37.80	43.20
2x11	WF 4201-2WS11WX2	42.00	47.40
2x12	WF 4201-2WS12WX2	46.20	51.60

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				x.x ±0.40	Ding	2019/05/15	UNIT	mm	SEE TAB
A1	2019/05/15	Modify		x.xx ±0.25	CHECK	DATE	SIZE	A4	
AO	2012/09/17	NEW		x.xxx ±0.15	APPROVE	DATE	SHEET	1/2	TITLE:
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3'			DIM	TOL	PROJ.

WCON
 Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com