

HSF

NOTES:
 Current Rating:1AMP
 Contact Resistance:35mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-55°C to +85°C

Contact Material:Phosphor Bronze
 Contact plating:Au or Sn over Ni
 Shell Material:SPCC,t=0.50mm
 Housing Material:PA9T+30%GF(UL94V-0)
 Cover Material:LCP+30%GF(UL94V-0)



Ordering Information

6320 - 068 S S XX M N A 02

No.of Pins
68Pin

Contact Plating
S4=15u"Gold/Tin
S5=30u"Gold/Tin

Packing
A=Tray

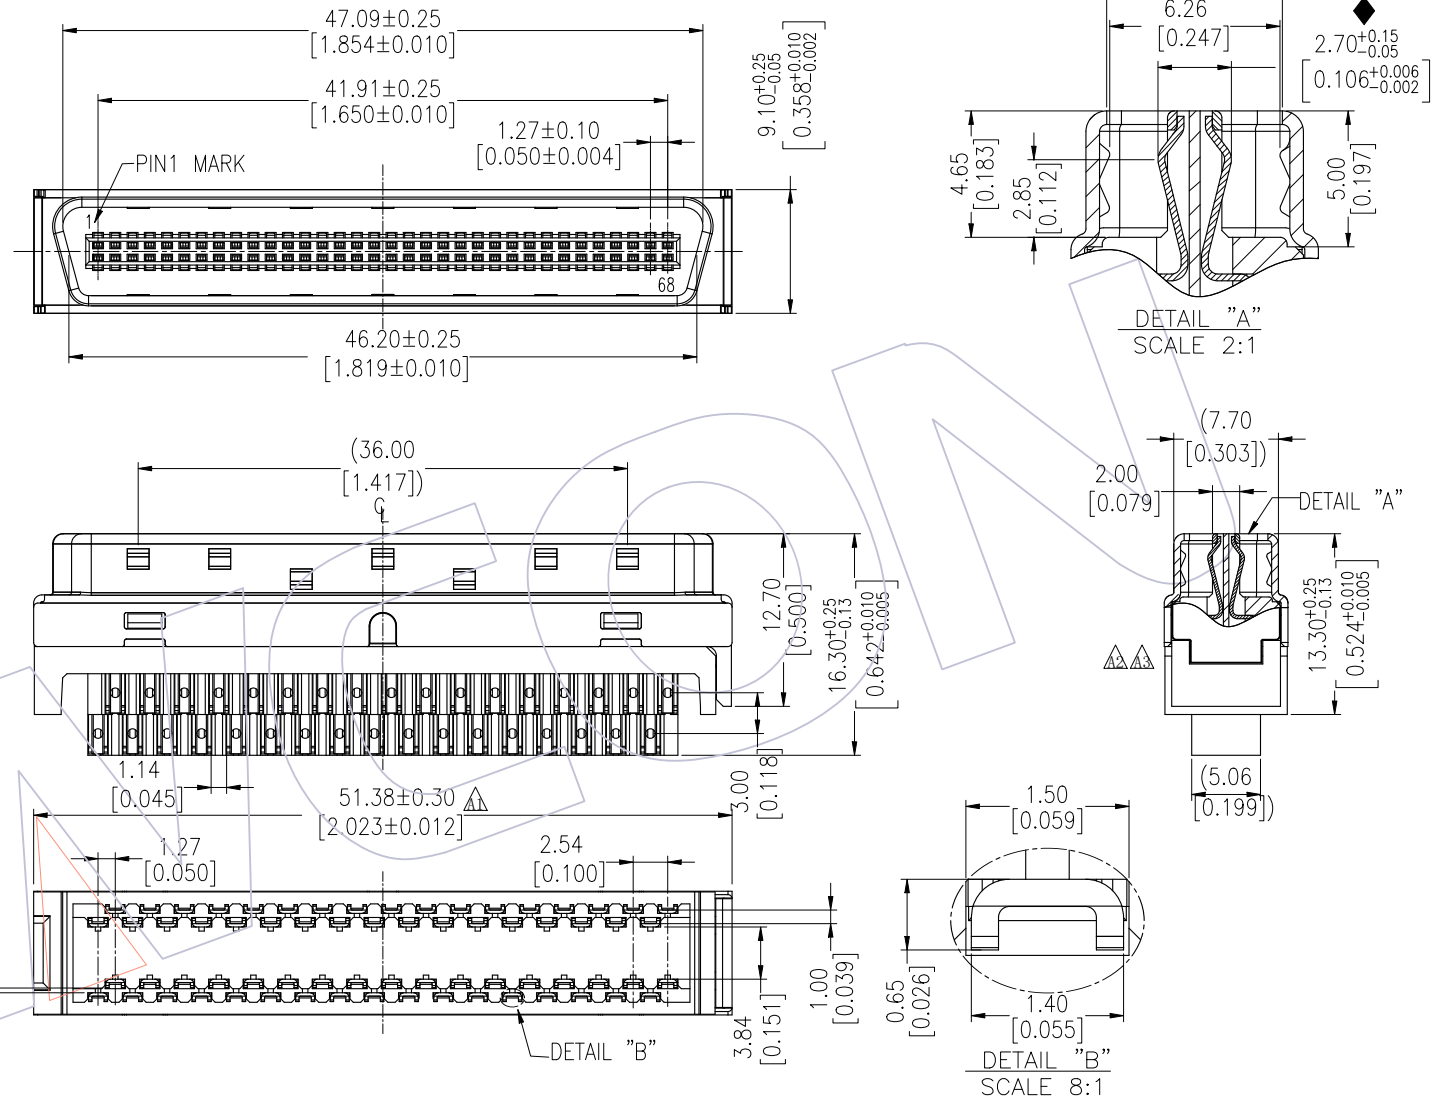

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A3	2016/03/24	改善客户焊线时溢胶问题	△
A2	2016/01/19	修改铁壳 6320-068SSXXMNA01 → 6320-068SSXXMNA02	△
A1	2013/12/31	修改产品总长尺寸	△
A0	2012/12/20	NEW	—

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
X.X ±0.40	JYHuang	2016/01/19	mm	A4	6320-068SSXXMNA02
X.XX ±0.25	CHECK	DATE	inch		TITLE:
X.XXX ±0.15	APPROVE	DATE		1/1	1.27mm SCSI 68P Male (Soldering Type)
Angle ± 3'					Customer NO.
DIM TOL					

UNIT	SIZE	SHEET	PROJ.
mm	A4	1/1	◆

TITLE:	1.27mm SCSI 68P Male (Soldering Type)
Customer NO.	



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--