
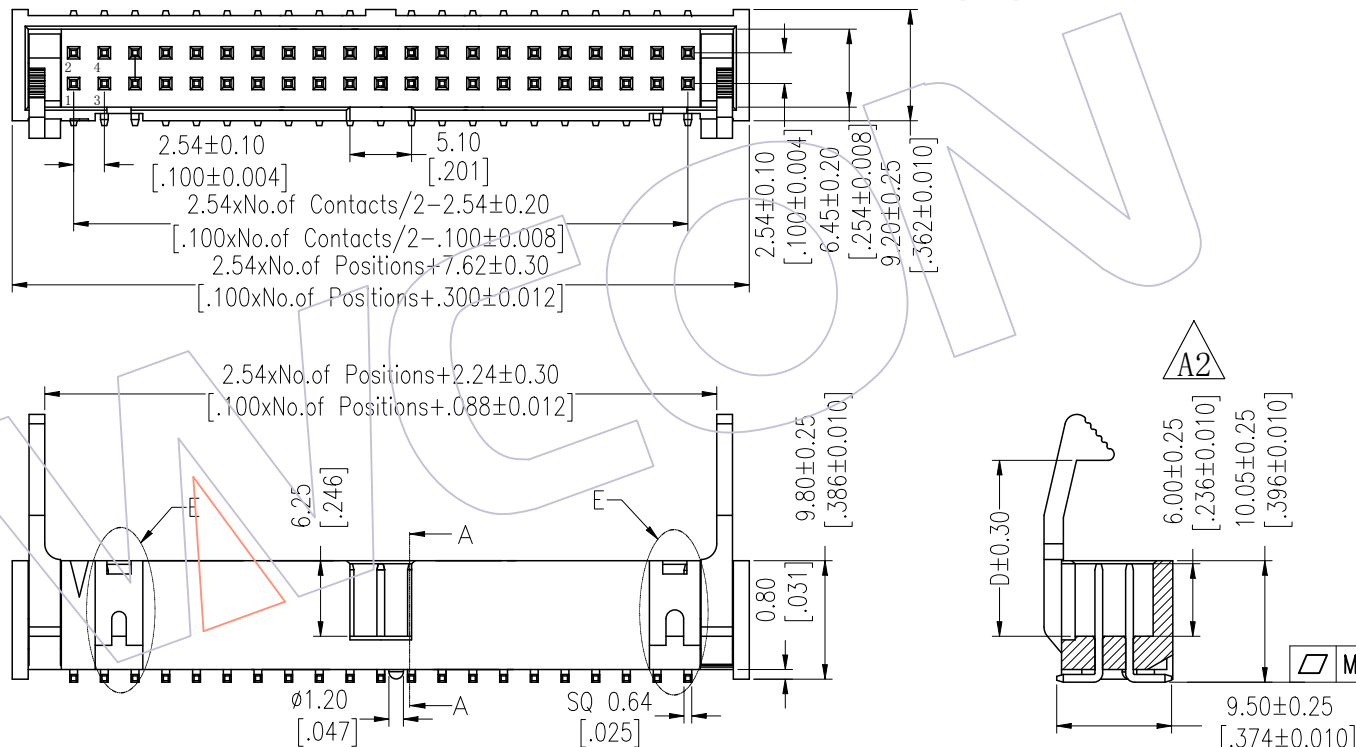


HSF

NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0
 Above 20 Poles With "E" Profile.

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ±0.05)

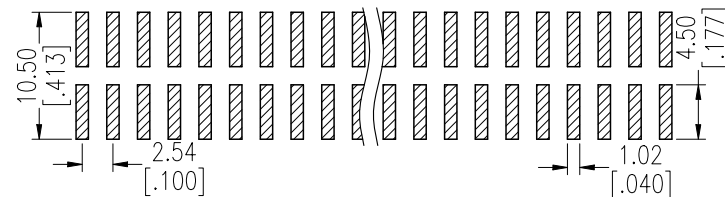

Ordering Information

3211 - XX M XX B X X 1

No. of Pins	Contact Plating	Insulator Color	Latch Type	Packing
06 26	G0=Gold Flash	B=Black	L=Long Latch	T=Tube
08 30	G3=10u"Gold	U=Blue	S=Short Latch	
10 34	G4=15u"Gold	G=Grey(427C)		
14 40	G5=30u"Gold	E=Grey(413C)		
16 50	S0=Gold Flash/Tin			
20 60	S3=10u"Gold/Tin			
64	S4=15u"Gold/Tin			
	S5=30u"Gold/Tin			
	SN=Tin			

Item	Pitch	Mating
Standard	2.54	5212/5211
Alternate		

A1	PIN(PerRow)	6-20P	26-40P	50-64P
	M	0.10	0.12	0.15

Dimension antitheses list	
PART NO	D
3211-XXMXXBLX1	14.55
3211-XXMXXBSX1	10.65

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2023/08/24	Add Size	DuYing	x.x ±0.40	DuYing	2023/08/24	UNIT	mm	SEE TAB
A1	2023/02/17	Add Flatness	DuYing	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/10/08	NEW	JYHuang	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	2.54 EJECTOR HEADER SMT METAL LATCH H=9.8
				Angle ± 3'			PROJ.	Customer NO.	

WCON
 Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com