

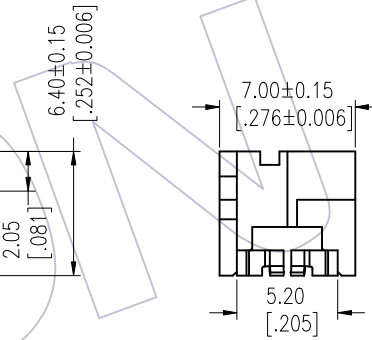
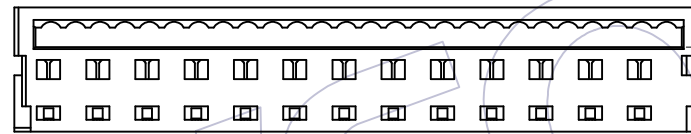


HSF

NOTES:

Current Rating: 1.2AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0


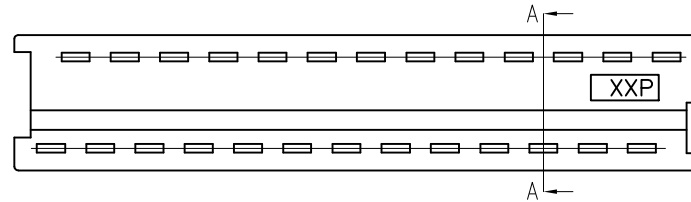


Section A-A

Ordering Information

3901-XX FI XX A N W X 1

No. of Pins	Contact Plating	Insulator	Color	Packing
04 16	SN=Tin	A=PBT	W=White	T=Tube
06 18				
08 20				
10 22				
12 24				
14 26				

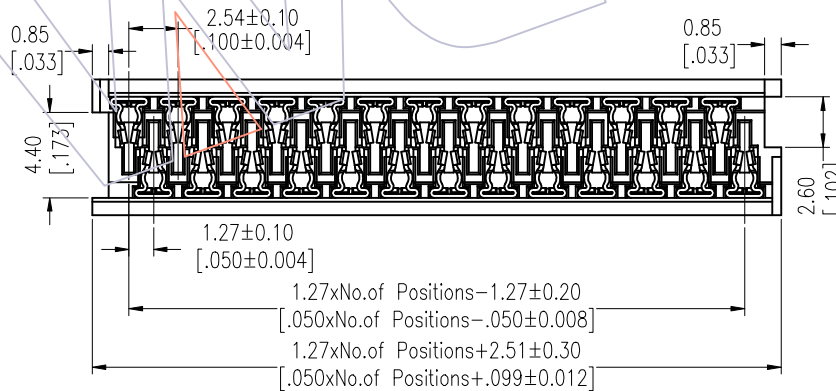

		OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
		x.X	±0.40	Ding		2018/05/15		UNIT	mm		3901-XXFIXXANWX1		
A1	2018/05/15	x.XX	±0.25	CHECK		DATE		SIZE	A4		TITLE:		
A0	2012/11/01	x.XXX	±0.15	APPROVE		DATE		SHEET	1/1		1.27mm SPC Connector IDC		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL		PROJ.	Customer NO.				

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com