





# HSF

NOTES:  
 Current Rating: 1.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C



Contact Material: Phosphor Bronze  
 Contact plating: Sn over Ni  
 Insulator Material: LCP+30%G.F UL94V-0

## Ordering Information

### 3901-XX MM XX D X B X X

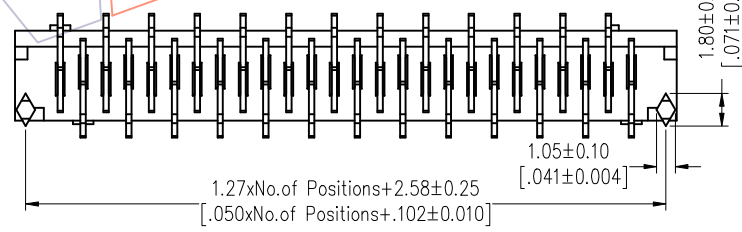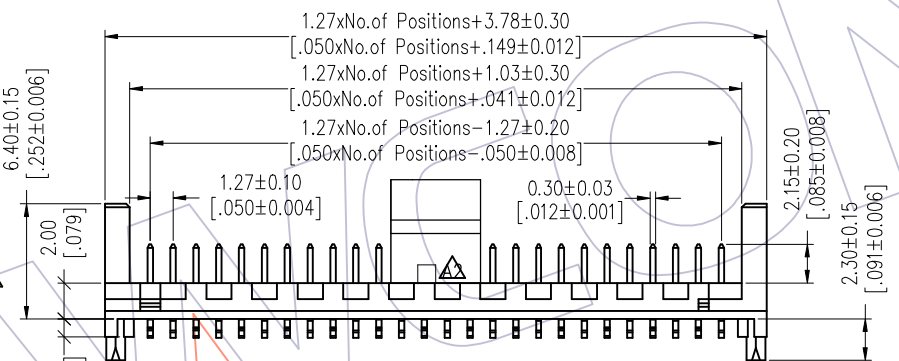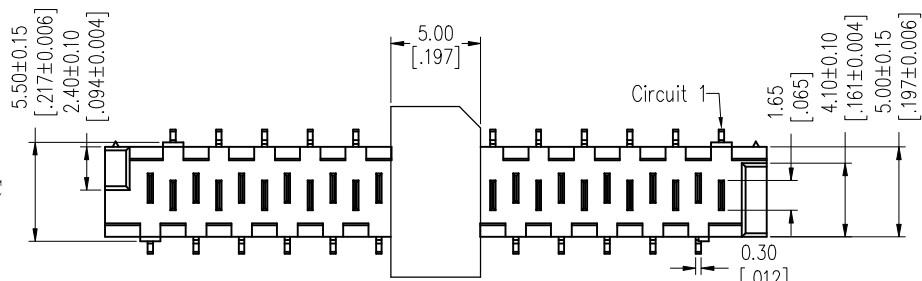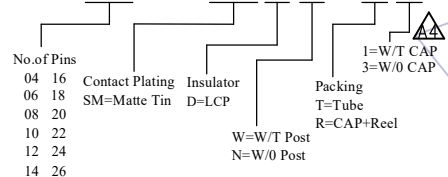

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

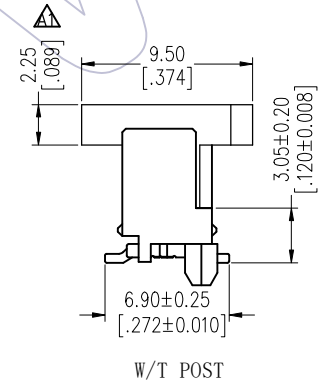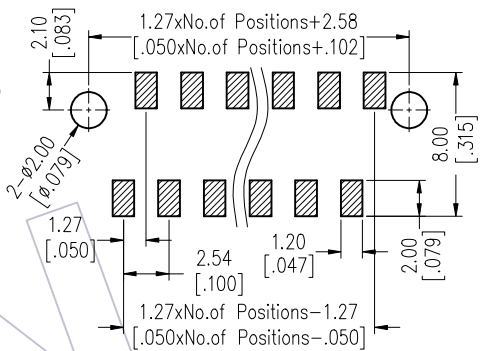

A4	2022/09/08	Add PART NO.3901-XXMMXXDXBX3	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A3	2018/05/15	Picoflex Connector--1.27mm SPC Connector	x.X ±0.40	Ding	2018/05/15	UNIT	mm	3901-XXMMXXDXBX3
A2	2016/11/01	Modify CAP	x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/11/01	NEW	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	1.27mm SPC Connector SMT With Peg
REV	DATE	MODIFICATION DESCRIPTION	ANGLE ± 3°			PROJ.		Customer NO.
			DIM TOL					

Http: [www.wcon.com](http://www.wcon.com)

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: <a href="mailto:sales@wcon.com">sales@wcon.com</a>	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: <a href="mailto:sales@wcon.com">sales@wcon.com</a>
---	--