


HSF


NOTES:
 Rated Current: 3.0A
 Contact Resistance: 20mΩ max
 Withstand Voltage: 1000V AC/Minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -40°C to +105°C

Insulator Material: PA66+15%G.F UL94V-0 
 Mating: WF2548-TPXX01

Ordering Information

3110-H XX B 01 W

No. of Pins: 6-64P
 Color: B=Black
 Logo: W=W/T WCON Logo

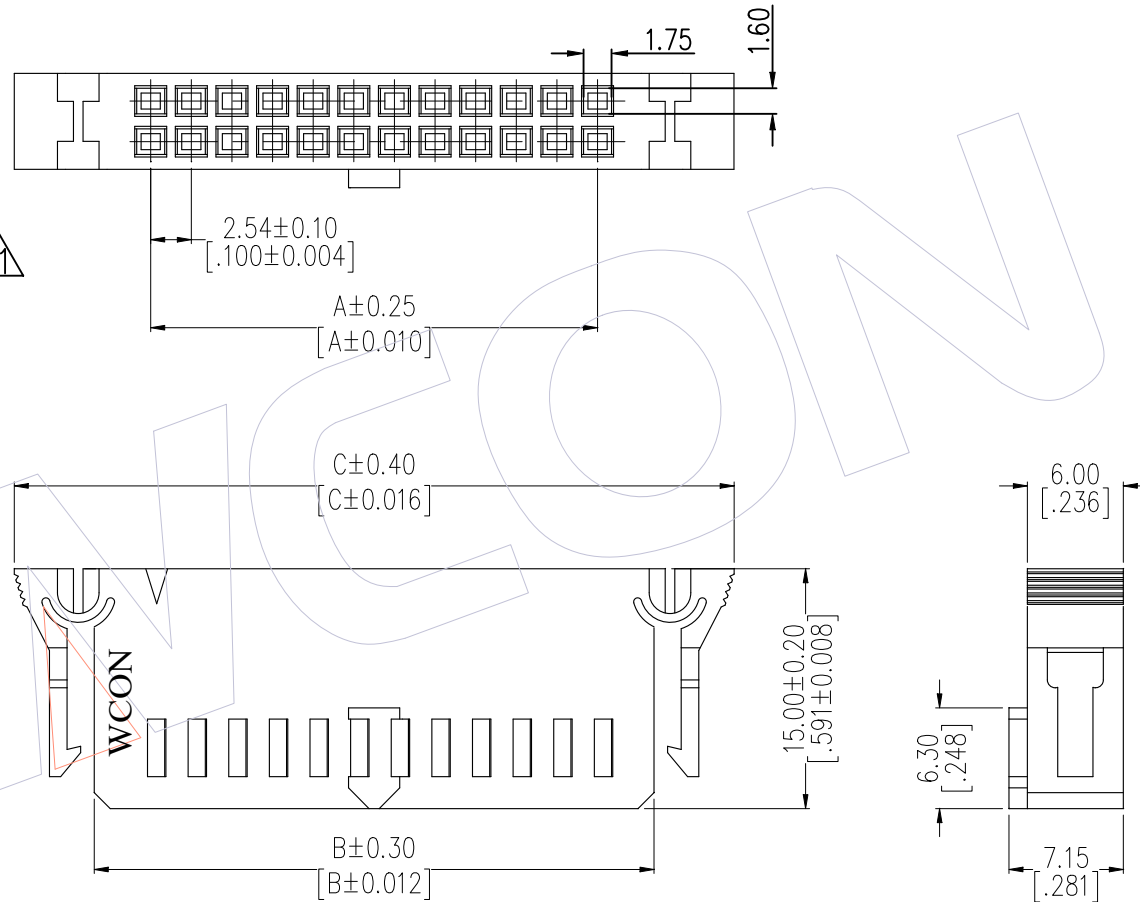

64PIN	78.74	85.80	95.80
60PIN	73.66	80.72	90.72
50PIN	60.96	68.02	78.02
40PIN	48.26	55.32	65.32
34PIN	40.64	47.70	57.70
30PIN	35.56	42.62	52.62
26PIN	30.48	37.54	47.54
24PIN	27.94	35.0	45.0
20PIN	22.86	29.92	39.92
18PIN	20.32	27.38	37.38
16PIN	17.78	24.84	34.84
14PIN	15.24	22.30	32.30
12PIN	12.70	19.76	29.76
10PIN	10.16	17.22	27.22
8PIN	7.62	14.68	24.68
6PIN	5.08	12.14	22.14
Circuit	A	B	C
	Dimension		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2021.08.05	Modify Insulator Material	-----	X.X ±0.40	ZHLL	2021.08.05	UNIT	mm [inch]	3110-HXXB01W
A0	2019.01.29	NEW	-----	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.54mm Housing
				X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3°					
				DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com