



HSF

TECHNICAL SPECS:

Current Rating: 1.0AMP
 Contact Resistance: 10mΩ Max
 Dielectric Strength: Min 1000V_{RMS}
 Mechanical Life: Min 100 cycles
 Mating Pin: φ0.40 to φ0.56mm
 Forces: (polished steel gauge φ0.43mm)
 Insertion: 200g Max/Pin, Withdrawal: 60g Min/Pin
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000), Sn over Ni
 Contact Clip(4 finger): BeCu(C17200), Au or Sn over Ni
 Insulator Material: PPS+30%G.F(UL94V-0)


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ±0.05)

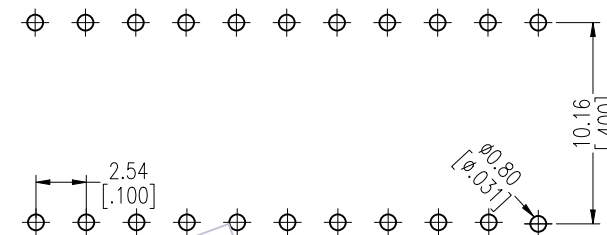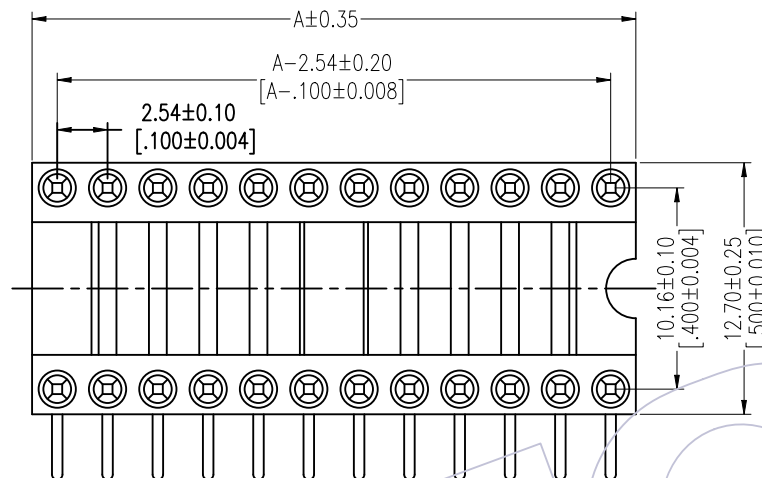

Ordering Information

7110-303 XX R XX 097 X 1

Row of Pitch 3=10.16mm
 No. of Pin See tab
 Contact Plating S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
 Pin Long 097=9.7mm
 Packing T=Tube, A=Tray

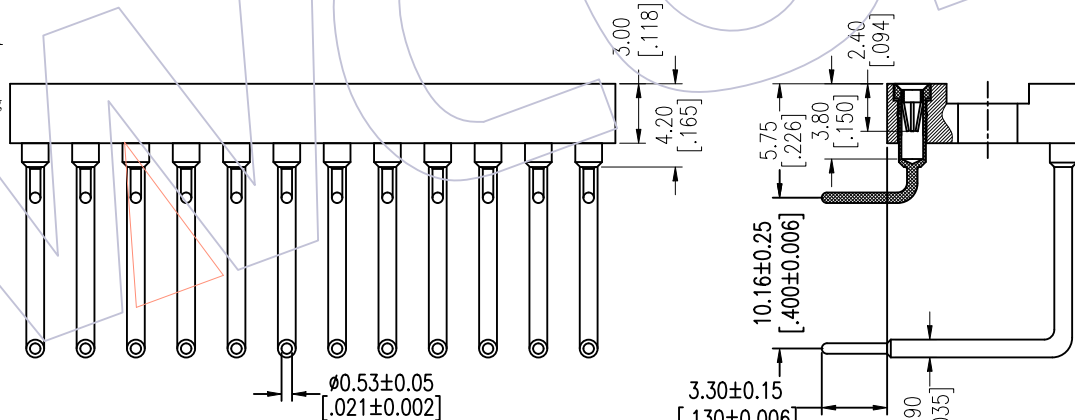

Dimensional & Ordering Information

NO. of Poles	Part No.	Dim
		A
20	7110-30320RXX097X1	25.40
22	7110-30322RXX097X1	27.94
24	7110-30324RXX097X1	30.48
28	7110-30328RXX097X1	35.56
32	7110-30332RXX097X1	40.64

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2012/11/02	NEW	-----	X.X ±0.40	JYHuang	2012/11/02	UNIT mm		7110-303XXRXX097X1
				X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE:
				X.XXX ±0.15			SHEET 1/1		2.54mm IC SOCKET 90° H=3.0
				Angle ± 3°	APPROVE	DATE	PROJ.		Row of Pitch 10.16mm
				DIM TOL					Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com