

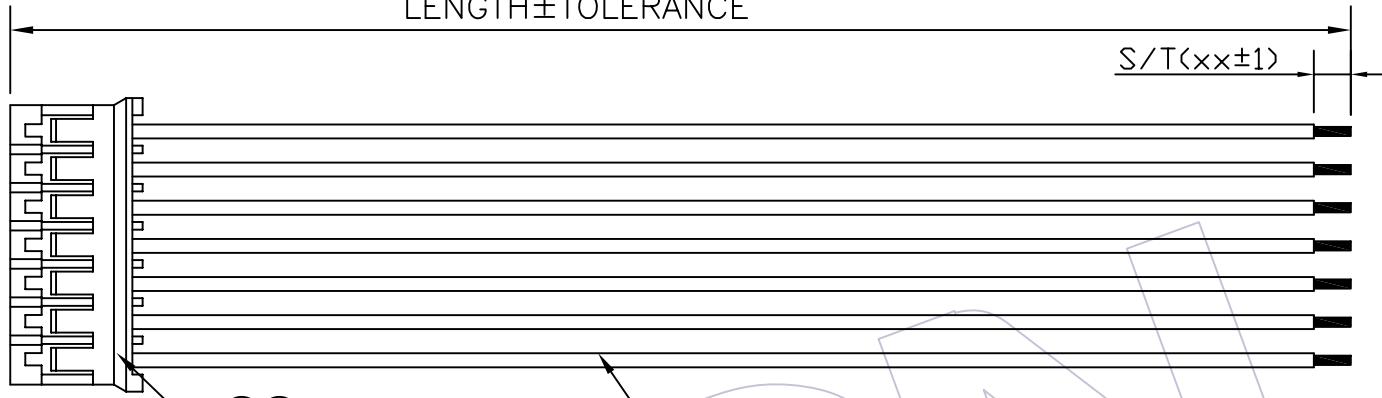


HSF



SPECIFICATIONS

Insulation Resistance: 5MΩ Min
 Contact Resistance: 3.0Ω Max
 Withstand Voltage: DC 300V, 10S
 The Cable Assembly Must 100% Test

CONNECT METHOD

P1	Color	P2
01	XXX	OPEN
02	XXX	OPEN
03	XXX	OPEN
XX	XXX	OPEN

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 24~30AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

Ordering Information

C9120 - xx 01 xxx 001

No. of Pins: 02~30P Shape Style: 01=one end Process, another one end plate tin Length of Line

NO.	PART NO.	NAME	Specification	Q'TY	UNIT
③	WF2001-TPSN01	Terminal	PH2.00mm Phosphor Bronze Tin Terminal	xx	PCS
②	WF2001-HxxW01	Housing	PH2.00mm xxP White Housing	1	PCS
①	Wxxxx-1xxx00001	WIRE	UL: xxxx, AWG: 24~30, Color: xx, Wire	xxxx	MM

REV		DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	ENGINEERING	DRAW	SCALE	FREE	WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO. LTD	
A0	09/09/24		NEW			X.X ±0.30	设计	UNIT	mm	料号 PART NO.	C9120-xx01xxx001
						X.XX ±0.20	审核	SHEET	1/1	品名 TITLE:	PH2.00 **P Housing TO OPEN
						X.XXX ±0.10	核准	PROJ.	客户料号 Customer NO.		
						Angle ± 2'					
						DIM TOL					