


HSF

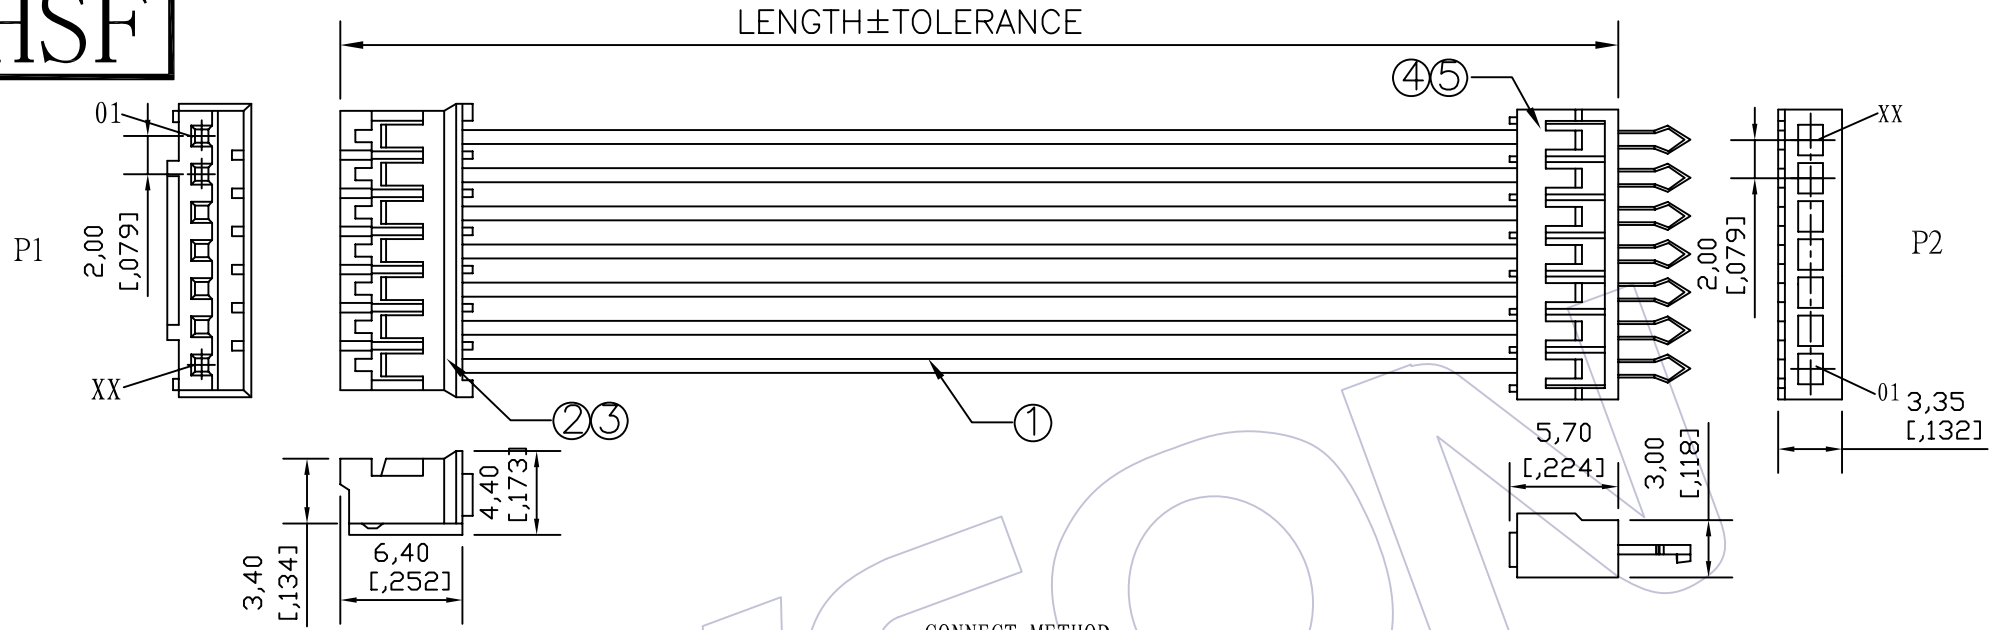

SPECIFICATIONS

Insulation Resistance: 5MΩ Min
 Contact Resistance: 3.0Ω Max
 Withstand Voltage: DC 300V, 10S
 The Cable Assembly Must 100% Test

CONNECT METHOD

P1	Color	P2
01	XXX	XX
02	XXX	XX
03	XXX	XX
XX	XXX	01

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 24~30AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

Ordering Information

C9120 - xx 02 xxx 101

No. of Pins: 02~30P Shape Style: 02=Both ends Process Length of Line: xxx

NO.	PART NO.	NAME	Specification	Q'TY	UNIT
⑤	WF2004-TBSN01	Terminal	PH2.00mm Brass Tin Terminal	xx	PCS
④	WF2004-HxxW01	Housing	PH2.00mm xxP 180° White Housing	1	PCS
③	WF2001-TPSN01	Terminal	JST PH2.00mm Phosphor Bronze Tin Terminal	xx	PCS
②	WF2001-HxxW01	Housing	JST PH2.00mm xxP White Housing	1	PCS
①	Wxxxx-1xxx00001	WIRE	UL: xxxx, AWG: 24~30, Color: xx, Wire	xxxx	MM

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	SCALE	FREE	UNIT	SHEET	PROJ.	料号 PART NO.	C9120-xx02xxx101
A0	09/09/24	NEW					mm	1/1		品名 TITLE:	PH2.00 **P HSG TO PH2.00 **P HSG
版次	日期	变更说明	变更	核准	工程图	绘图				客户料号 Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	ENGINEERING	DRAW					

WCON 维峰五金电子有限公司
 WAFE HARDWARE ELECTRONICS CO. LTD