



# HSF

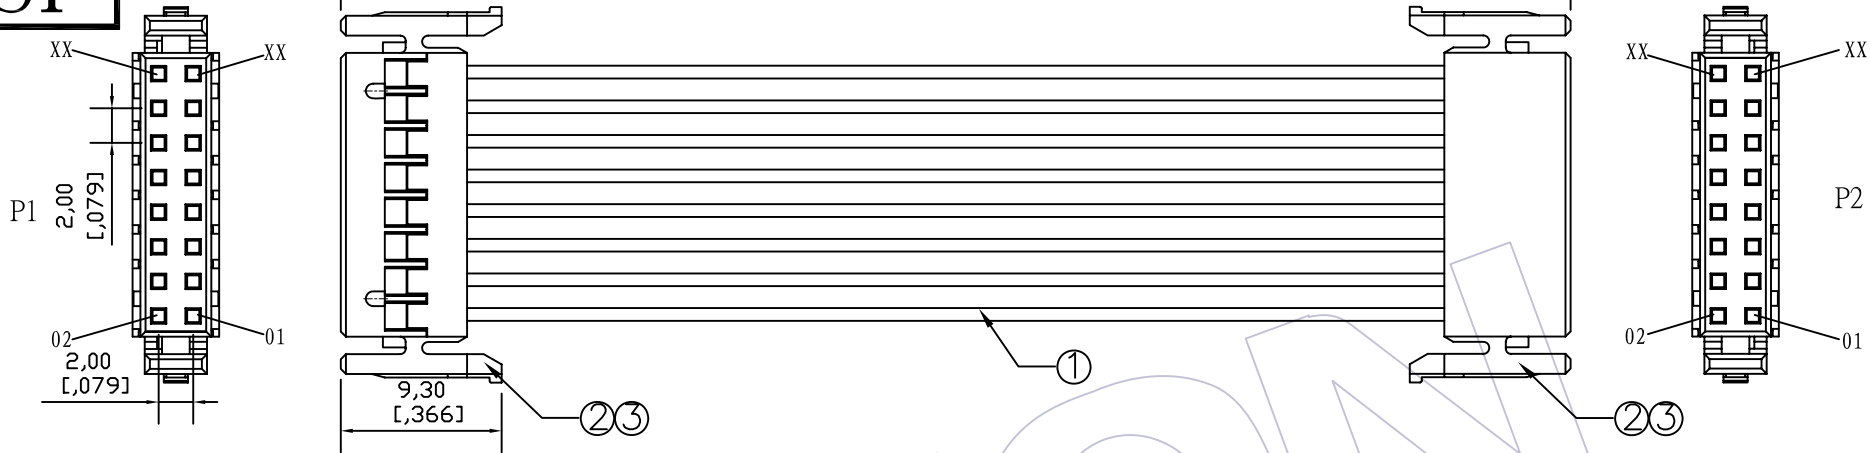

### SPECIFICATIONS

Insulation Resistance: 5M $\Omega$  Min  
 Contact Resistance: 3.0 $\Omega$  Max  
 Withstand Voltage: DC 300V, 10S  
 The Cable Assembly Must 100% Test

### CONNECT METHOD



Wire SPEC	LENGTH	TOLERANCE
ULxxxx 22~28AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

### Ordering Information

C9120 - xx 02 xxx 202

No. of Pins: 02~15P      Shape Style: 02=Both ends Process      Length of Line: xxx

NO.	PART NO.	NAME	Specification	Q' TY	UNIT
③	WF2002-TPSN01	Terminal	PH2.00mm Phosphor Bronze Tin Terminal	Double xx	PCS
②	WF2002A-HxxW01	Housing	PHD xxP PH2.0mm White Housing	2	PCS
①	Wxxxx-1xxx00001	WIRE	UL: xxxx, AWG: 22~28, Color: xx, Wire	xxxx	MM

AO		09/09/24	NEW			工程图 ENGINEERING	绘图 DRAW	BEN	09/09/24	SCALE	FREE	WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO. LTD	
版次 REV	日期 DATE	变更说明 MODIFICATION DESCRIPTION		变更 CHANGE	核准 APPROVE	X.X ±0.30	设计 DESIGN			UNIT	mm	料号 PART NO.	C9120-xx02xxx202
						X.XX ±0.20	审核 CHECK			SIZE	A4	品名 TITLE:	PH2.00 **P HSG TO PH2.00 **P HSG
						X.XXX ±0.10	核准 APPROVE			SHEET	1/1	客户料号 Customer NO.	
						Angle ± 2'				PROJ.	客户料号 Customer NO.		
						DIM TOL							