


HSF

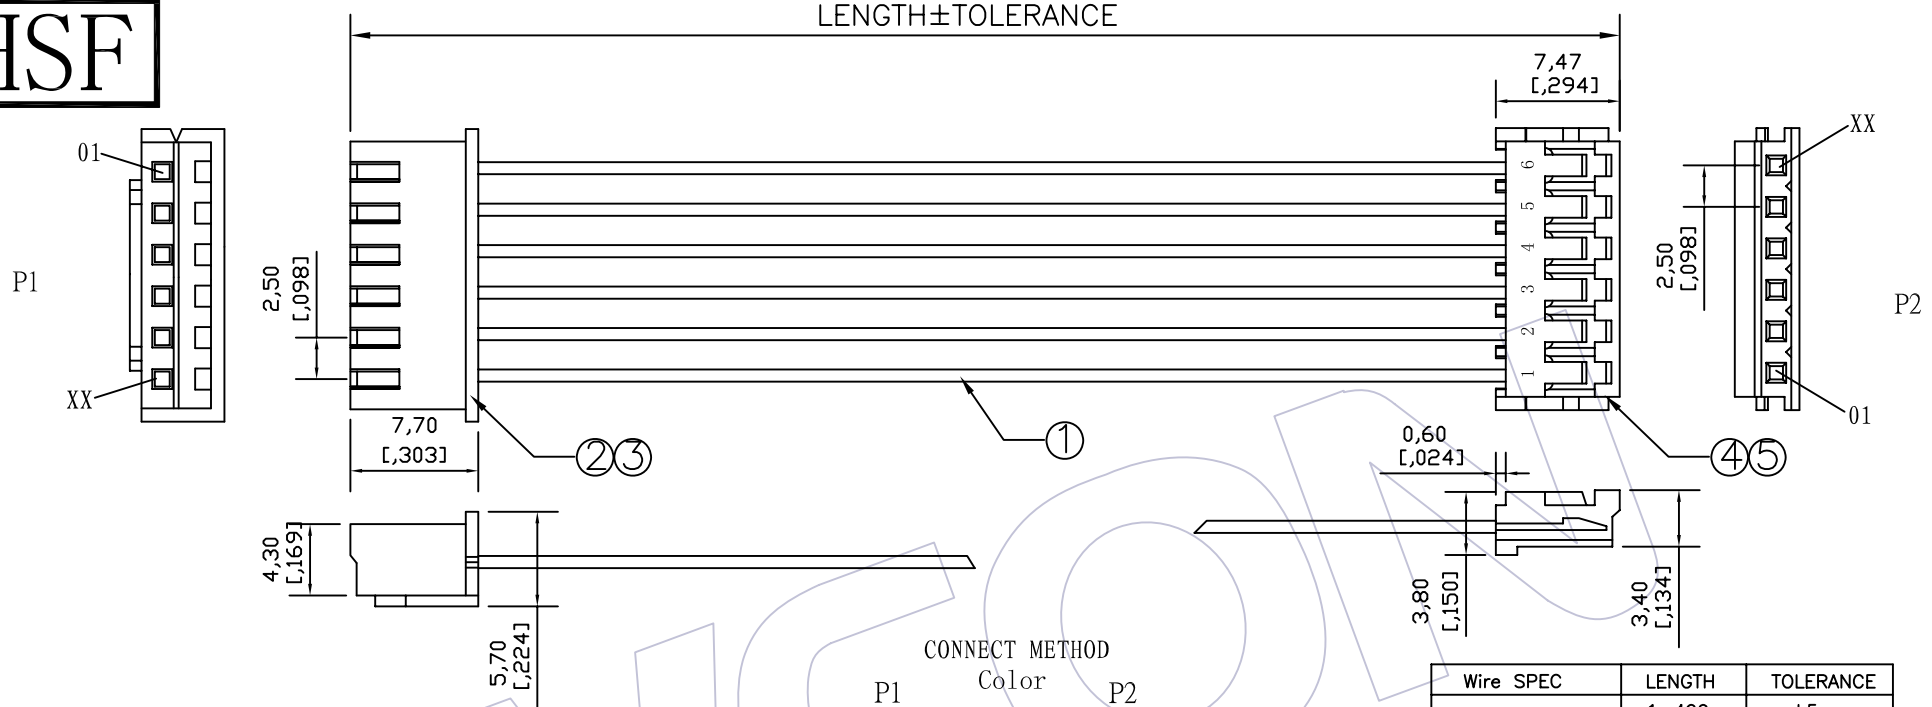

SPECIFICATIONS

Insulation Resistance: 5MΩ Min
 Contact Resistance: 3.0Ω Max
 Withstand Voltage: DC 300V, 10S
 The Cable Assembly Must 100% Test

CONNECT METHOD		
P1	Color	P2
01	XXX	XX
02	XXX	XX
03	XXX	XX
XX	XXX	01

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 22~28AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

Ordering Information

C9130 - xx 02 xxx 101

No.of Pins: 02~15P Shape Style: 02=Both ends Process Length of Line

NO.	PART NO.	NAME	Specification	Q' TY	UNIT
⑤	WF2504-TPSN01	Terminal	PH2.50mm Phosphor Bronze Tin Terminal	xx	PCS
④	WF2504-HxxW01	Housing	PH2.50mm xxP White Housing	1	PCS
③	WF2501-TPSN01	Terminal	PH2.50mm Phosphor Bronze Tin Terminal	xx	PCS
②	WF2501-HxxW01	Housing	PH2.50mm xxP White Housing	1	PCS
①	Wxxxx-1xxx00001	WIRE	UL: xxxx, AWG: 22~28, Color: xx, Wire	xxxx	MM

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	SCALE	UNIT	SHEET	PROJ.	客户料号 Customer NO.
AO	09/09/26	NEW			FREE	mm	1/1		

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

料号 PART NO. C9130-xx02xxx101
 品名 TITLE: PH2.50 **P HSG/PH2.50 **P HSG