


# HSF

**NOTES:**

Rated Current: 3.0A  
 Rated Voltage: 250V  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/Minute  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40℃ to +105℃

Insulator Material: PA66,G.F,UL94V-0,White

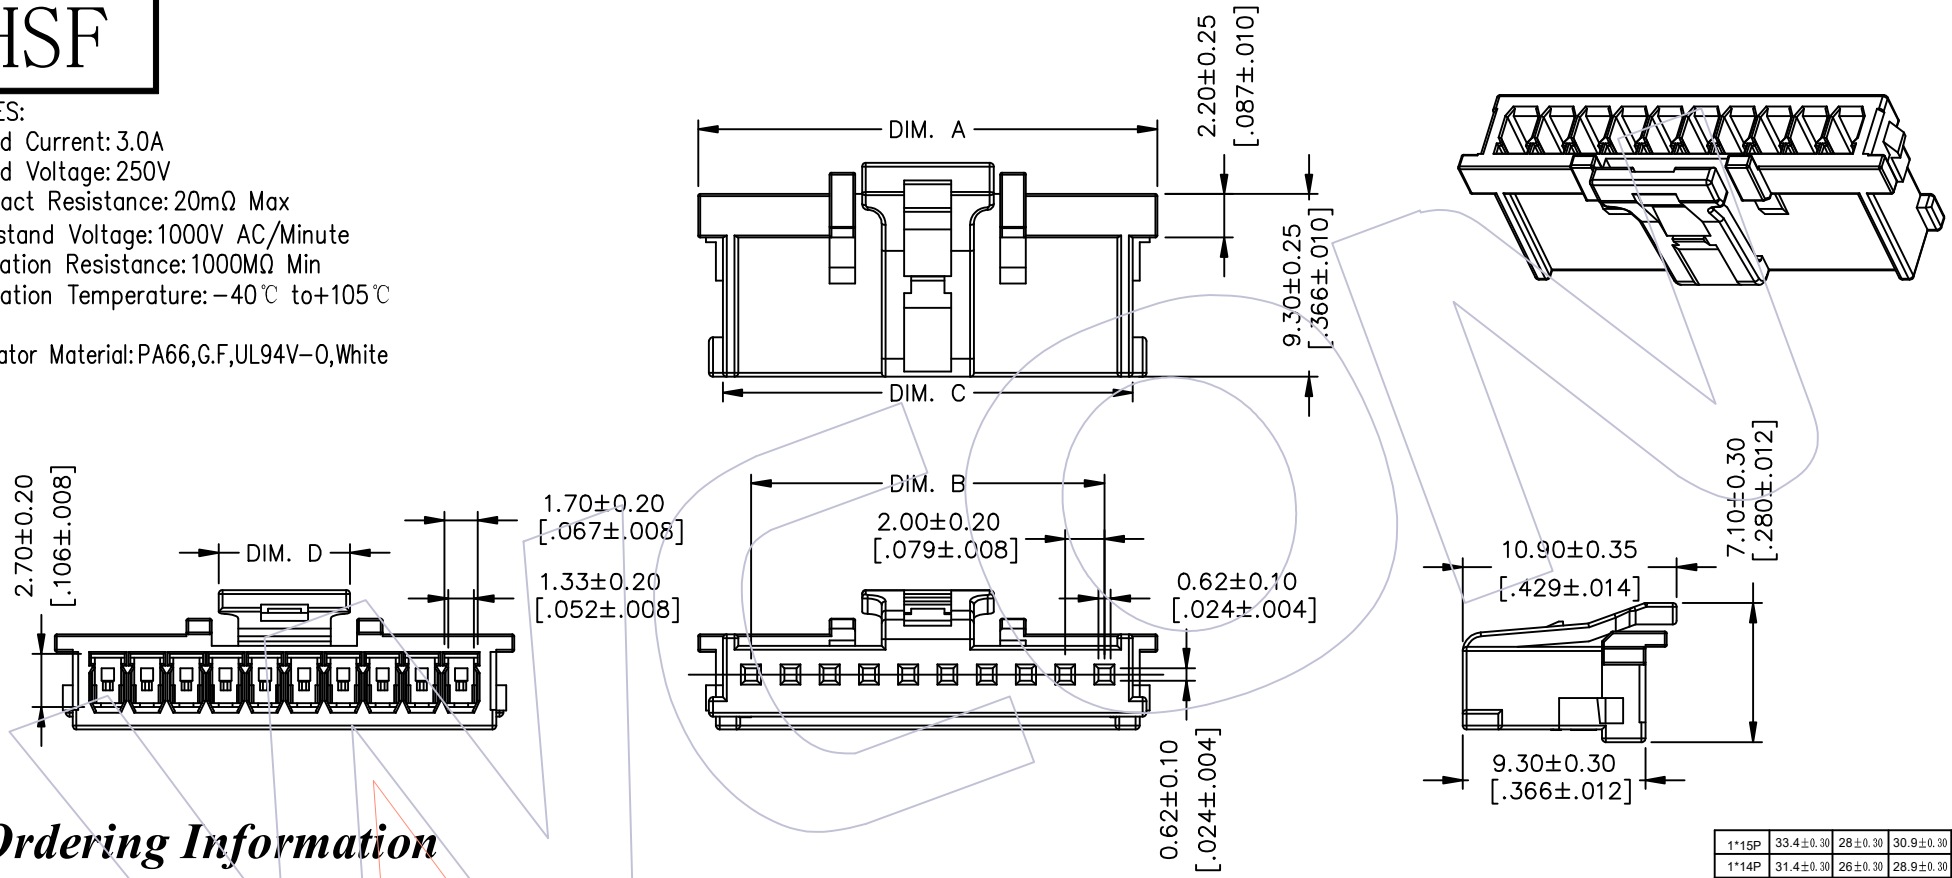

## Ordering Information

WF2007-1 H XX X 01


1=Dual Row

H=Housing


NO. of Pins  
Per Row

Journal Number


Color  
W=White




2P



3P



4P



5P

No. of Pins	DIM A	DIM B	DIM C	DIM D
1*15P	33.4±0.30	28±0.30	30.9±0.30	6.7±0.25
1*14P	31.4±0.30	26±0.30	28.9±0.30	6.7±0.25
1*13P	29.4±0.25	24±0.25	26.9±0.25	6.7±0.25
1*12P	27.4±0.25	22±0.25	24.9±0.25	6.7±0.25
1*11P	25.4±0.25	20±0.25	22.9±0.25	6.7±0.25
1*10P	23.4±0.25	18±0.25	20.9±0.25	6.7±0.25
1*9P	21.4±0.25	16±0.25	18.9±0.25	6.7±0.25
1*8P	19.4±0.25	14±0.25	16.9±0.25	6.7±0.25
1*7P	17.4±0.25	12±0.25	14.9±0.25	6.7±0.25
1*6P	15.4±0.25	10±0.25	12.9±0.25	6.7±0.25
1*5P	13.4±0.25	8±0.25	10.9±0.25	6.7±0.25
1*4P	11.4±0.25	6±0.25	8.9±0.25	4.7±0.25
1*3P	9.4±0.25	4±0.25	6.9±0.25	4.3±0.25
1*2P	7.4±0.25	2±0.25	4.9±0.25	2.8±0.25

OPERATION	DATE	SCALE	FIT	PART NO.
X.X ±0.40	2023/05/12	UNIT mm		WF2007-1HXXW01
X.XX ±0.25	CHECK DATE	SIZE A4		TITLE:
X.XXX ±0.15		SHEET 1/1		2.0mm 单排Housing, M Type
Angle ± 3°	APPROVE DATE	PROJ.		Customer NO.
DIM TOL				

**WCON**  
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920  
 WCON-Kunshan Tel: +86 512 57468408  
 Fax: +86 769 85358915 Fax: +86 512 57468468  
 E-mail: sales@wcon.com E-mail: salesks@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2023/05/12	Correction mark	
A0	2022/10/25	NEW	