


HSF

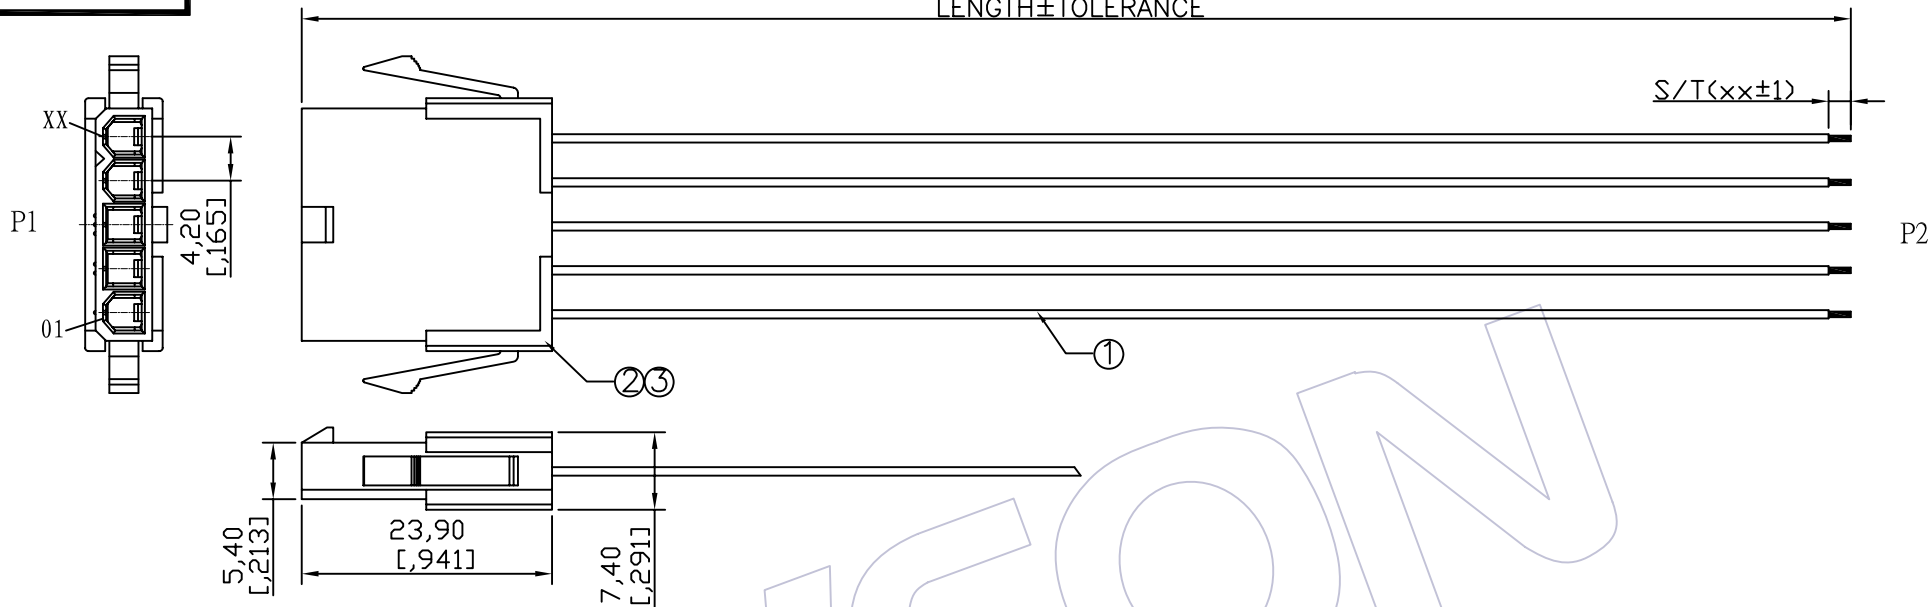

SPECIFICATIONS

Insulation Resistance: 5MΩ Min
 Contact Resistance: 3.0Ω Max
 Withstand Voltage: DC 300V, 10S
 The Cable Assembly Must 100% Test

CONNECT METHOD

P1	Color	P2
01	XXX	OPEN
02	XXX	OPEN
03	XXX	OPEN
XX	XXX	OPEN

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 18~24AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

Ordering Information

C9160 - xx 01 xxx 101

No.of Pins:
02~05P

Shape Style:
01=one end Process,
another one end plate tin

Length of Line

NO.	PART NO.	NAME	Specification	Q'TY	UNIT
③	WF4201-Txxx0x	Terminal	4.20mm Phosphor Bronze/Brass Tin Terminal	xx	PCS
②	WF4201-1Hxxx02	Housing	Single Row PH4.20mm xxP Color: xx Housing	1	PCS
①	Wxxxx-1xxx00001	WIRE	UL:xxxx,AWG:18~24,Color:xx,Wire	xxxx	MM

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	SCALE	FREE	UNIT	SHEET	PROJ.	客户料号 Customer NO.
A0	09/10/20	NEW			BEN	09/10/20	mm	1/1		
版次	日期	变更说明	变更	核准	工程图	绘图	SCALE	FREE	SCALE	FREE
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	ENGINEERING	DRAW	UNIT	mm	SCALE	FREE
					X.X ±0.30	设计	SIZE	A4	料号 PART NO.	C9160-xx01xxx101
					X.XX ±0.20	DESIGN	SHEET	1/1	品名 TITLE:	PH4.20 **P Housing TO OPEN
					X.XXX ±0.10	审核	PROJ.		客户料号 Customer NO.	
					Angle ± 2'	CHECK				
					DIM TOL	核准				
						APPROVE				

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD