


# HSF

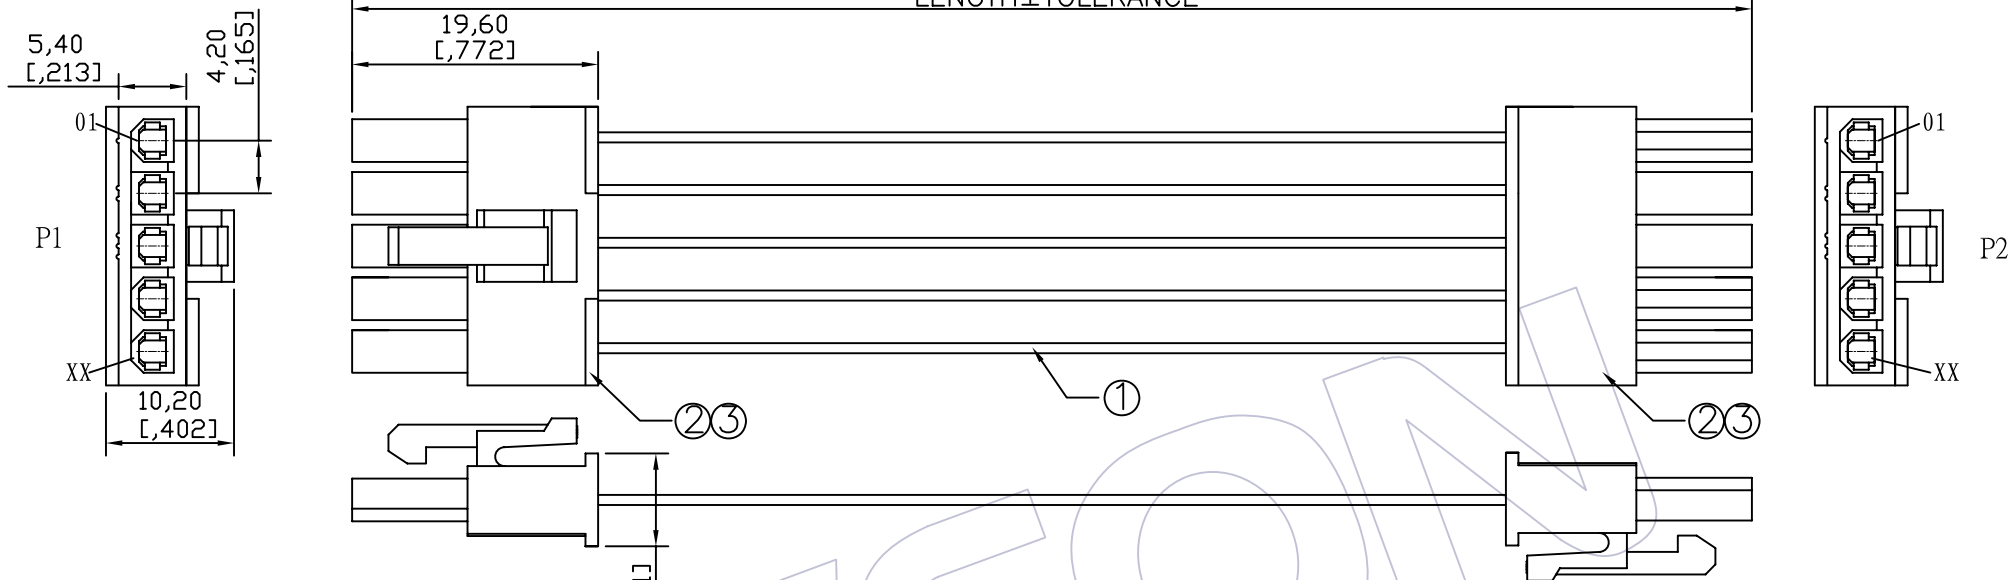

## SPECIFICATIONS

Insulation Resistance: 5MΩ Min  
 Contact Resistance: 3.0Ω Max  
 Withstand Voltage: DC 300V, 10S  
 The Cable Assembly Must 100% Test

## Ordering Information

C9160 - xx 02 xxx 001

No. of Pins:  
02~05P

Shape Style:  
02=Both ends Process

Length of Line

## CONNECT METHOD

	Color	
P1		P2
01	XXX	01
02	XXX	02
03	XXX	03
	⋮	
XX	XXX	XX

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 18~24AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

③	WF4201-Txxx0x	Terminal	4.20mm Phosphor Bronze/Brass Tin Terminal	Double xx PCS
②	WF4201-1Hxxx01	Housing	Single Row PH4.20mm xxP Color: xx Housing	2 PCS
①	Wxxxx-1xxx00001	WIRE	UL:xxxx,AWG:18~24,Color:xx,Wire	xxxx MM
NO.	PART NO.	NAME	Specification	Q'TY UNIT

					工程图 ENGINEERING	绘图 DRAW	BEN	09/10/23	SCALE	FREE	 <b>WCON</b> 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO. LTD	
					X.X	±0.30			UNIT	mm		
					X.XX	±0.20			SIZE	A4		
					X.XXX	±0.10			SHEET	1/1		
					Angle	± 2'			PROJ.	客户料号Customer NO.		
A0	09/10/23	NEW									料号 PART NO.	C9160-xx02xxx001
版次 REV	日期 DATE	变更说明 MODIFICATION DESCRIPTION	变更 CHANGE	核准 APPROVE							品名 TITLE:	PH4.20 **P HSG TO PH4.20 **P HSG