


HSF

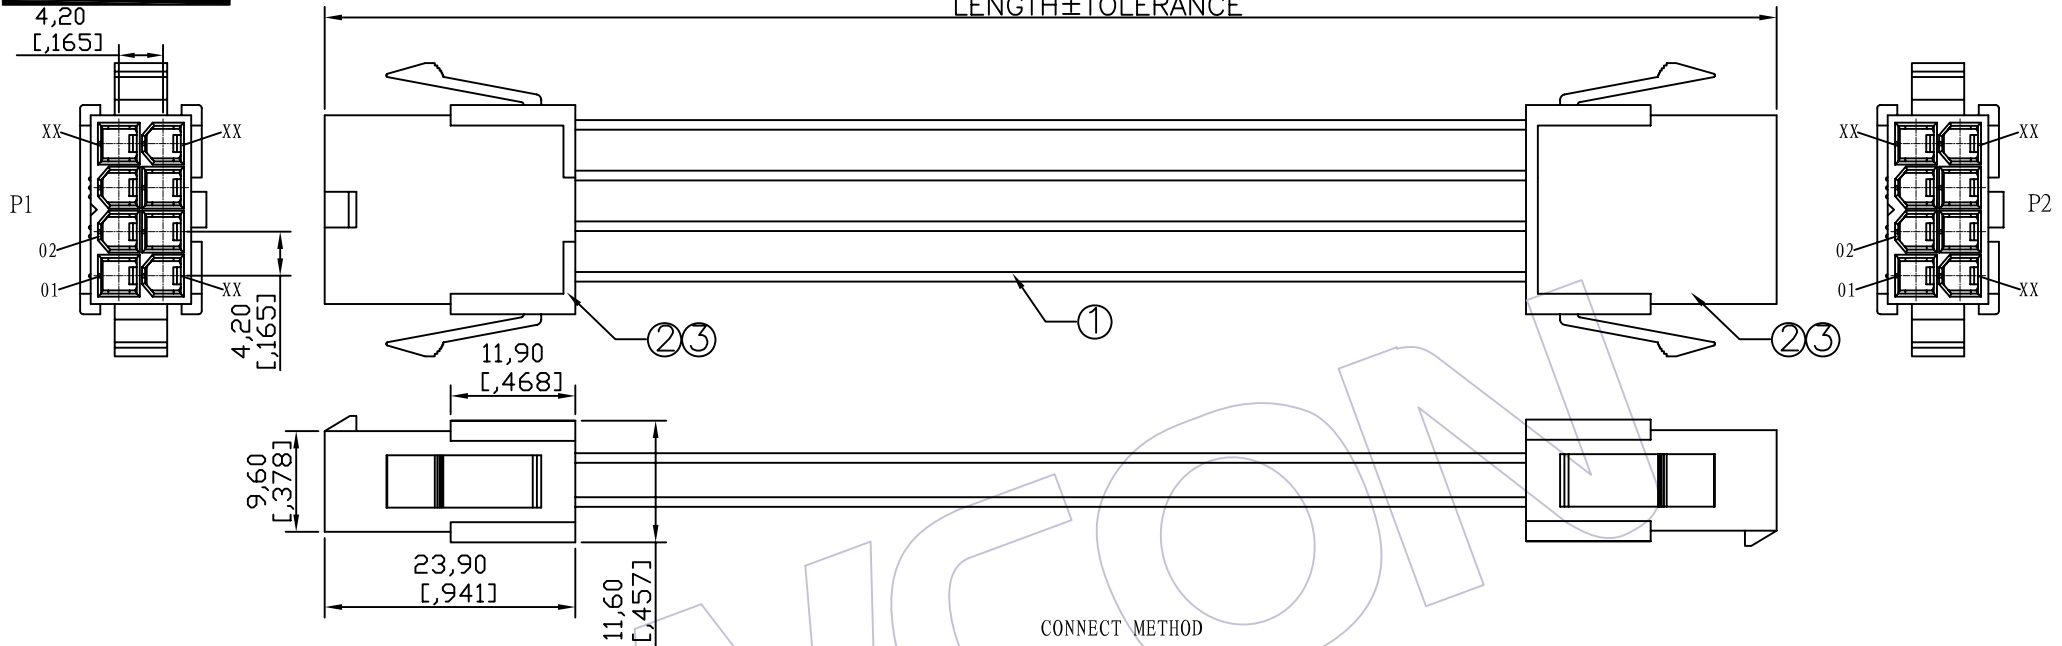

SPECIFICATIONS

Insulation Resistance:5MΩ Min
 Contact Resistance:3.0Ω Max
 Withstand Voltage:DC 300V, 10S
 The Cable Assembly Must 100% Test

CONNECT METHOD

P1	Color	P2
01	XXX	01
02	XXX	02
03	XXX	03
XX	XXX	XX

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 18~24AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

Ordering Information

C9160 - xx 02 xxx 401

No.of Pins:
02~12P

Shape Style:
02=Both ends Process

Length of Line

NO.	PART NO.	NAME	Specification	Q' TY	UNIT
③	WF4201-Txxx0x	Terminal	4.20mm Phosphor Bronze/Brass Tin Terminal	Double xx	PCS
②	WF4201-2Hxxx02	Housing	Dual Row PH4.20mm xxP Color: xx Housing	2	PCS
①	Wxxxx-1xxx00001	WIRE	UL:xxxx,AWG:18~24,Color:xx,Wire	xxxx	MM

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	SCALE	FREE	UNIT	SIZE	SHEET	PROJ.	客户料号Customer NO.
A0	09/10/20	NEW					mm	A4	1/1		

WCON 维峰五金电子有限公司
 WAFE HARDWARE ELECTRONICS CO. LTD

料号 PART NO. C9160-xx02xxx401
 品名 TITLE: PH4.20 **P HSG TO PH4.20 **P HSG