


# HSF

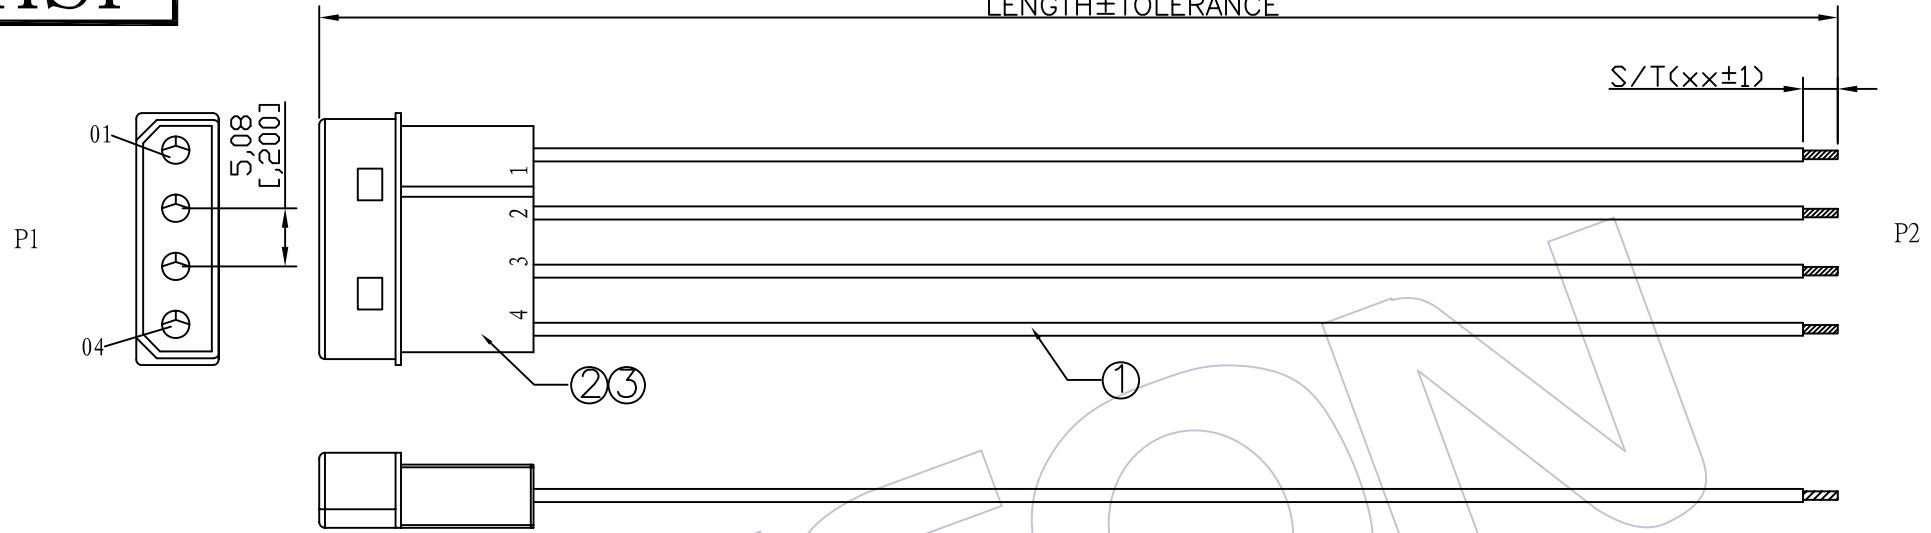

**SPECIFICATIONS**  
 Insulation Resistance: 5MΩ Min  
 Contact Resistance: 3.0Ω Max  
 Withstand Voltage: DC 300V, 10S  
 The Cable Assembly Must 100% Test

### Ordering Information

**C9170 - xx 01 xxx 201**

No. of Pins: 4P  
 Shape Style: 01=one end Process, another one end plate tin  
 Length of Line: xxx

**CONNECT METHOD**

P1	Color	P2
01	XXX	OPEN
02	XXX	OPEN
03	XXX	OPEN
04	XXX	OPEN

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 16~20AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

NO.	PART NO.	NAME	Specification	Q'TY	UNIT
③	WF5086-TBSN01	Terminal	5.08mm Male Brass Tin Terminal	4	PCS
②	WF5086-H04W01	Housing	Big 4P FEMALE PH5.08mm White Housing	1	PCS
①	Wxxxx-1xxx00001	WIRE	UL:xxxx,AWG:16~20,Color:xx,Wire	xxxx	MM

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	SCALE	FREE	UNIT	SHEET	PROJ.	客户料号 Customer NO.
AO	09/10/26	NEW					mm	1/1		
版次	日期	变更说明	变更	核准	工程图	绘图				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	ENGINEERING	DRAW				

**WCON** 维峰五金电子有限公司  
 WAFE HARDWARE ELECTRONICS CO. LTD

料号 PART NO. C9170-xx01xxx201  
 品名 TITLE: PH5.08 4P Female Housing TO OPEN