

HSF

NOTES:


Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

Ordering Information

5226 - XX YP XX B N 01

Two Parts Conn+Cover	No. of Pins 6P-50P	Contact Plating S0=Gold Flash/Ni S3=10u"Gold/Ni S4=15u"Gold/Ni S5=30u"Gold/Ni SN=Tin	Color Insulator B=Black G=Grey(427C)
-------------------------	-----------------------	---	--

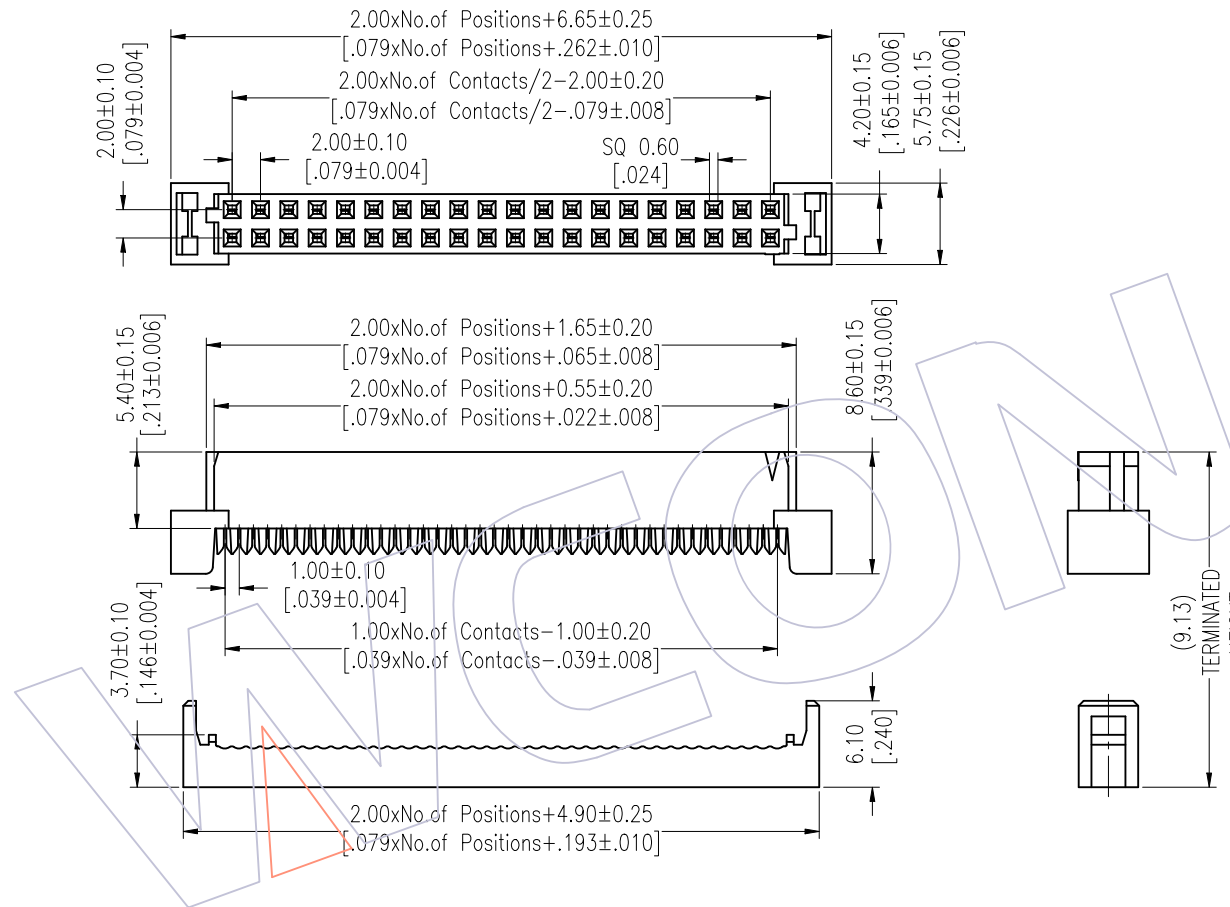

Item	Pitch	Mating
Standard	2.00	3121
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2022/05/25	Modify TITLE	DuYing	x.x ±0.40	DuYing	2022/05/25	UNIT	mm	5226-XXYPXXBN01
A0	2012/10/10	NEW	JYHuang	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.00mm IDC SOCKET "M" TYPE
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/2	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com