HSF

NOTES:
Rated Current: 1.0AMP
Contact Resistance: 30mΩ max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ min
Operation Temperature: −40℃ to +105℃

Contact Material: Phosphor Bronze
Contact Plating: Au Over Ni
Insulator Material: PBT+30%G.F UL94V−0

POLARIZATION ONLY A1
(APPLICABLE FOR 14 TO 50 CKT)

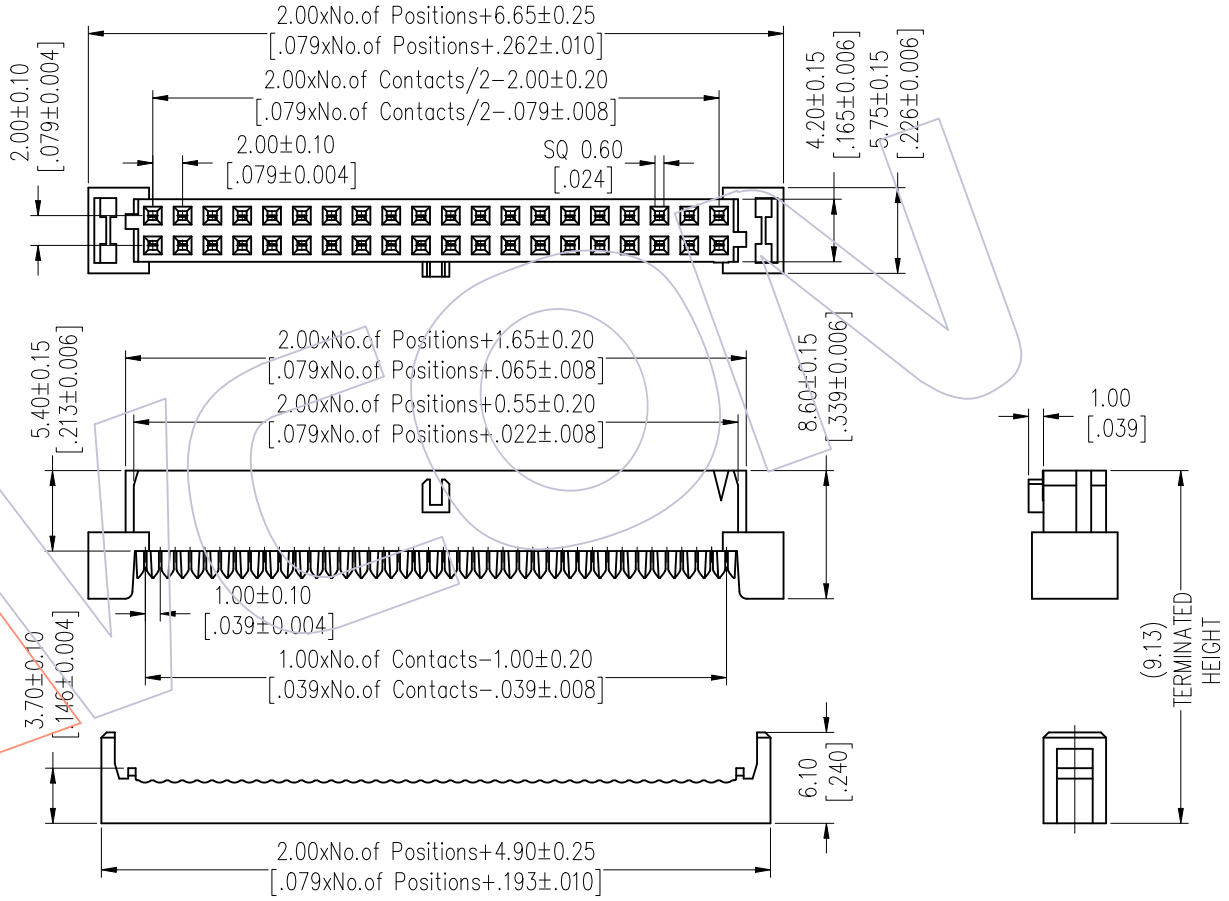

Ordering Information

5226 - XX YP XX B W 02

- 5226: Two Parts Conn+Cover
- XX: No.of Pins 6P-50P A2
- YP: Contact Plating
  - G0=Gold Flash
  - G3=10u"Gold
  - G4=15u"Gold
  - G5=30u"Gold
  - S0=Gold Flash/Ni
  - S3=10u"Gold/Ni
  - S4=15u"Gold/Ni
  - S5=30u"Gold/Ni
- B: Color Insulator
  - B=Black
  - G=Grey(427C)
- W: W

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A3	2022/05/25	Modify TITLE A3	DuYing
A2	2018/05/29	MODIFY A2	Ding
A1	2012/07/28	MODIFY A1	——
A0	2010/09/28	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	DuYing	DATE	2022/05/25
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm / inch
SIZE	A4
SHEET	1/2
PROJ.	

PART NO. 5226-XXYPXXBW02

TITLE: 2.00mm IDC SOCKET "M" TYPE (WITH POLARIZATION ONLY) A1

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com