

HSF

PRELIMINARY

NOTES:

Rated Current: 3.0A
 Rated Voltage: 250V
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 1500V
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +125°C
 Housing Material: PA46,G.F,UL94V-0,Colour(See PN)
 TPA Material: PA46,G.F,UL94V-0,Colour: Black/White

Ordering Information

WF2508 - 2 H H XX X X 01

Row
2=Double row

Class shape code
H=Housing(TPA)





HSG material characteristics
H=High temperature resistance

Internal code

Packaging code
A=Tray
0=PE

HSG Colour
B=Black
T=Natural

NO.of PIN
02=4 Pin
.....
08=16 Pin

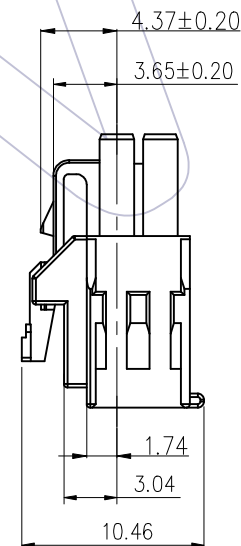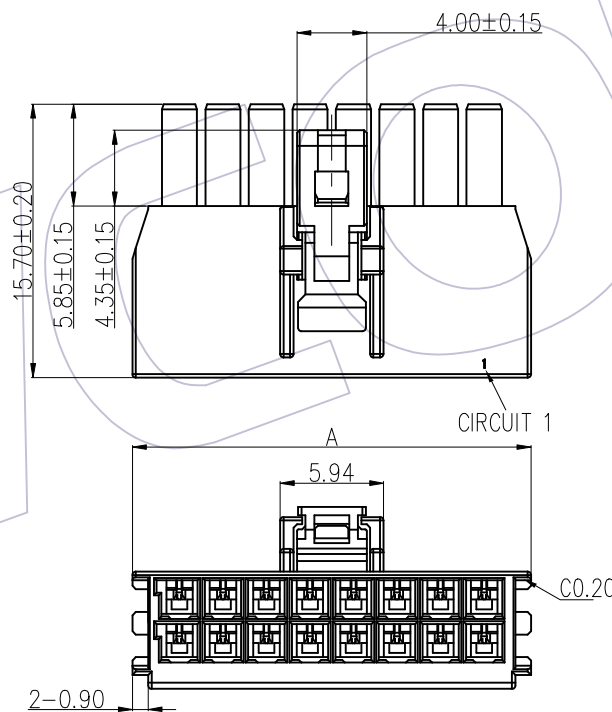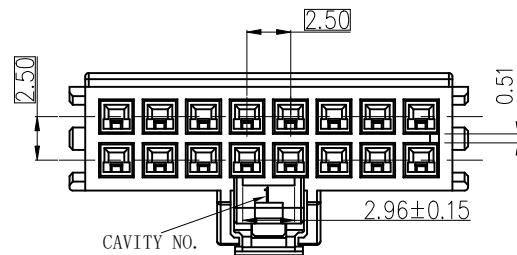

2*8	22.90±0.25
2*7	20.20±0.25
2*6	17.70±0.25
2*5	15.20±0.25
2*4	12.70±0.25
2*3	10.20±0.25
2*2	7.70±0.25
Pin	A

OPERATION

DRAW
Dean Liu

DATE
2023/04/03

SCALE
1:1

PART NO.
WF2508-2HHXXX01

x.x ±0.40

CHECK

DATE

UNIT
mm

TITLE:
2.5mm HOUSING SINGLE

x.xx ±0.25

APPROVE

DATE

SIZE
A4

CONNECTOR

x.xxx ±0.15

Angle ± 3°

DATE

SHEET
1/4

Customer NO.

Angle ± 3°

DIM

TOL

PROJ.

Customer NO.

±0.15

CHANGE

DATE

PROJ.

Customer NO.

±0.15

CHANGE

DATE

PROJ.

Customer NO.

±0.15

CHANGE

DATE

PROJ.

Customer NO.

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com

A0	2023/04/03	NEW	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE