

# HSF

**NOTES:**

Rated Current: 9.5AMP  
 Rated Voltage: 300V  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1600V AC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40℃ to +120℃






Contact Material: Copper Alloy  
 Contact plating: 100u" Tin over 50u" nickel  
 Insulator Material: PA66,G.F,UL94V-O,BK  
 Cover Material: PA66,G.F,UL94V-O,BK

**Ordering Information:**

P F 350SW- 2F XX X XX N 1 N

F=Female    Pitch 350=3.50    No.of Pins 04-46P    Contact Plated SN=Bright Tin SM=Matte Sn    Blank=W/T WCON Logo N=W/O WCON Logo

Color    Type  
 B=BLACK    N=W/O Two Side Screw  
 U=BLUE  
 G=GREEN  
 R=RED

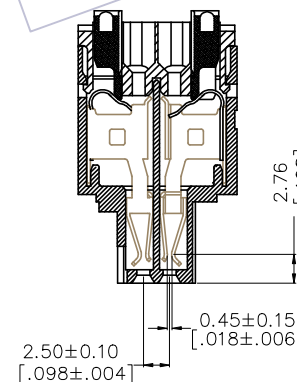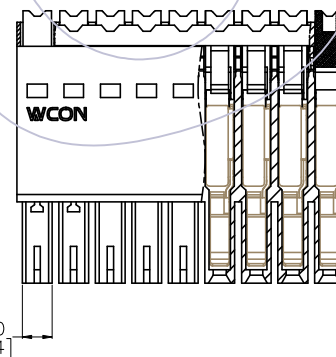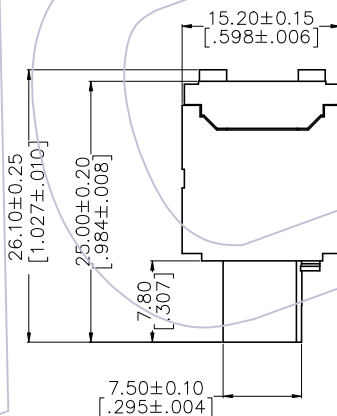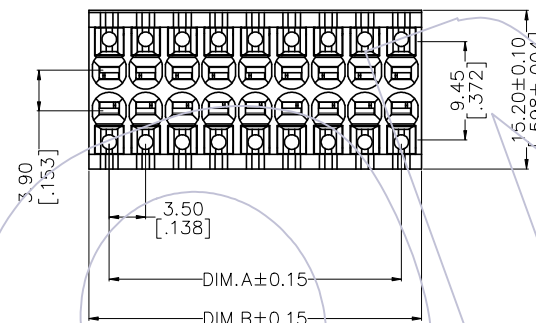

SECTION A-A  
SCALE 1:1

No.Of PIN	DIM.A	DIM.B
2X2	3.50	7.40
2X3	7.00	10.90
2X4	10.50	14.40
2X5	14.00	17.90
2X6	17.50	21.40
2X7	21.00	24.90
2X8	24.50	28.40
2X9	28.00	31.90
2X10	31.50	35.40
2X11	35.00	38.90
2X12	38.50	42.40
2X13	42.00	45.90
2X14	45.50	49.40
2X15	49.00	52.90
2X16	52.50	56.40
2X17	56.00	59.90
2X18	59.50	63.40
2X19	63.00	66.90
2X20	66.50	70.40
2X21	70.00	73.90
2X22	73.50	77.40
2X23	77.00	80.90

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
x.x ±0.40	Liu Hui	2018/11/29	UNIT	mm	PF350SW-2FXXXXXN1 (N)
x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
x.xxx ±0.15	APPROVE	DATE	SHEET	1/2	3.50*2.50mm Pluggable Terminal Block Dual Row, Female, W/O Two Side Screw
Angle ± 3'			PROJ.	⌀	Customer NO.
DIM TOL					



Http: [www.wcon.com](http://www.wcon.com)

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: <a href="mailto:sales@wcon.com">sales@wcon.com</a>	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: <a href="mailto:salesks@wcon.com">salesks@wcon.com</a>
---	--

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2018/11/29	NEW	-----