


NOTES:  
 Rated Current: 9.0AMP  
 Contact Resistance: 30mΩ max  
 Withstand Voltage: 1500V AC/minute  
 Insulation Resistance: 1000MΩ min  
 Operation Temperature: -25℃ to +85℃

PART NO.	PIN	A	B	Material
WF4202-2WRHXXX2	2*5P及以下	+0.30 -0.10	+0.40 -0.20	PA46
	2*5P以上	+0.50 -0.00	+0.60 -0.00	
WF4202-2WRXXX2	2*1P-2*12P	±0.20	±0.30	PA66

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

Contact Material: Brass  
 Contact plating: Au Or Sn Over Ni  
 Insulator Material: PA66(White Transparent UL94-V2 std) Or PA46(Natural UL94-V0)

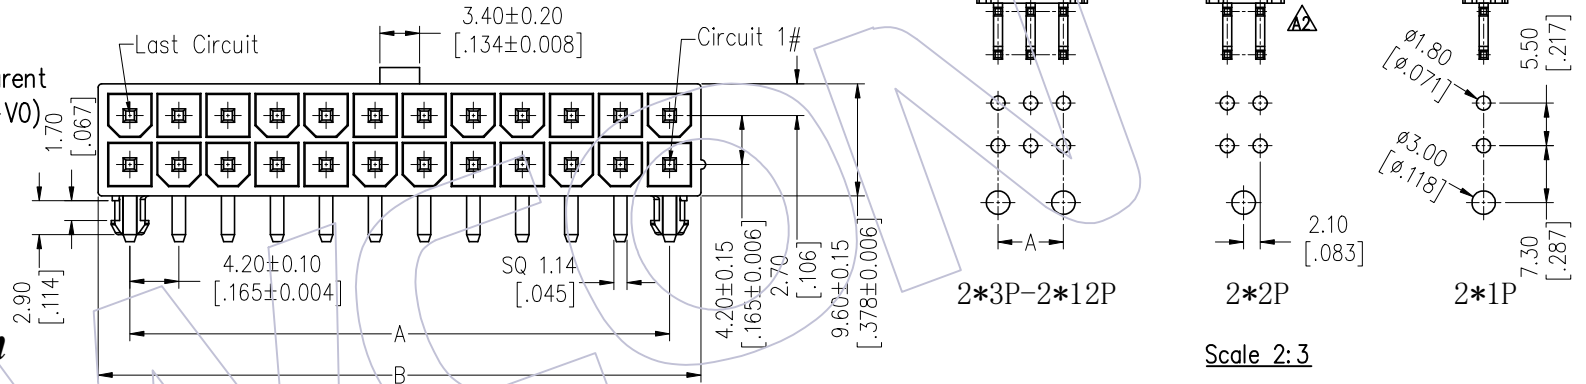

### Ordering Information

WF4202 -2WR XX W A 2

No. of Row  
Dual Row

No. of pins  
01~12P

Contact Plating  
 S0=Gold Flash/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin

Insulation Material  
 H=PA46  
 Blank=PA66

Color  
 B=Black  
 T=Natural  
 W=Transparent

Packing  
 0=PE Bag  
 A=Tray

### Specification & Ordering Information:

Circuit	Part No.	Dimension		Pcs /Tray
		A	B	
2x01	WF4202-2WR01WA2	---	5.40	410
2x02	WF4202-2WR02WA2	4.20	9.60	230
2x03	WF4202-2WR03WA2	8.40	13.80	160
2x04	WF4202-2WR04WA2	12.60	18.00	130
2x05	WF4202-2WR05WA2	16.80	22.20	100
2x06	WF4202-2WR06WA2	21.00	26.40	80
2x07	WF4202-2WR07WA2	25.20	30.60	70
2x08	WF4202-2WR08WA2	29.40	34.80	60
2x09	WF4202-2WR09WA2	33.60	39.00	60
2x10	WF4202-2WR10WA2	37.80	43.20	50
2x11	WF4202-2WR11WA2	42.00	47.40	50
2x12	WF4202-2WR12WA2	46.20	51.60	40

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A3	2023/03/06	Modify Color	△3	DuYing	OPERATION	2023/03/06	UNIT	SEE TAB	WF4202-2WR12WA2
A2	2022/05/12	Modify Surface	△2	DuYing	OPERATION	2023/03/06	SIZE	SEE TAB	
A1	2019/05/15	MODIFY		Ding	CHECK	DATE	SHEET	4.20 MINI FIT DUAL ROW 90° WITH POST	
A0	2012/09/19	NEW			APPROVE	DATE	PROJ.	Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.

**WCON**

Http: www.wcon.com

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: salesks@wcon.com