


HSF



NOTES:
 Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

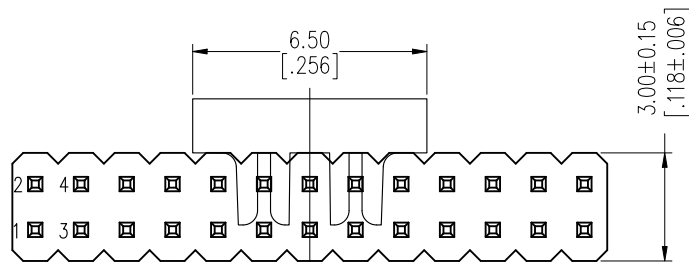

Odd Number

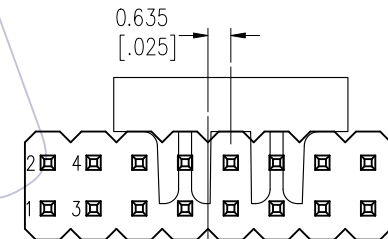
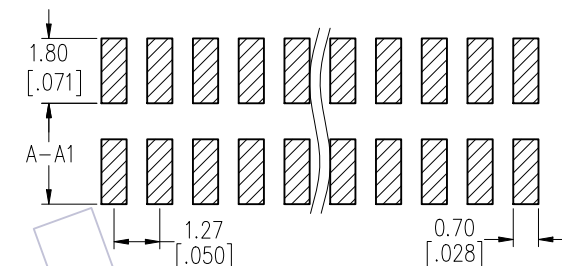


Dual Numbers \triangle

Ordering Information

1325-12 XX XX Z XXX C R XX

No. of Pins Per Row: 01~50	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length(Short) L=A1+B+2.8 Standard: 071=7.1 082=8.2 092=9.2	Insulator C=PA9T	Series No. 01~99	Packing A=Tray T=Tube P=Tube+CAP R=Tape&Reel+CAP
-------------------------------	---	--	---------------------	---------------------	--

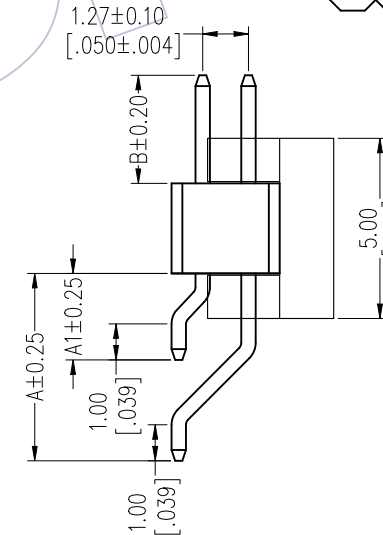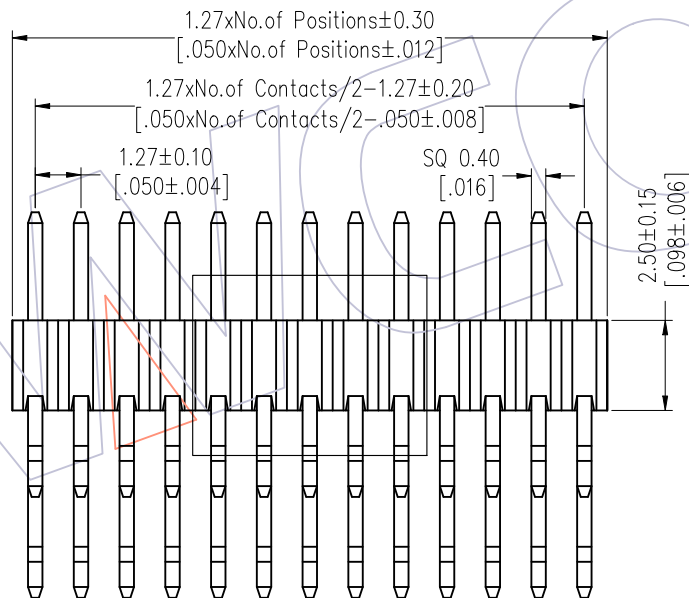

Item	Pin Length	A1	A	B	Mating
Standard	7.1	2.40	5.20	1.90	2321
	8.2	2.40	5.20	3.00	2334
	9.2	2.40	5.20	4.00	2344
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/01/18	MODIFY PART NO.	-----	X.X ± 0.40	William Chen	2018/01/18	UNIT	mm [inch]	1325-12XXXXZXXXCXXX \triangle
A1	2013/06/07	Modify Drawing	-----	X.XX ± 0.25	CHECK	DATE	SIZE	A4	TITLE: 1.27 Pin Header, DUAL ROW, R/A&SMT, WITHOUT POST, H=2.5
A0	2012/03/31	NEW	-----	X.XXX ± 0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3°			PROJ.	ϕ	
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com